SCOPE OF WORK

DESIGN INCLUDES REPLACEMENT OF AN EXISTING WATER COOLED INDOOR AC UNIT IN KIND FOR AN EXISTING 10 STORY COMMERCIAL BUILDING. NO CHANGE IN USE, EGRESS, OR OCCUPANCY UNDER THIS FILING.

(TR-1) SPECIAL INSPECTIONS

1.	MECHANICAL SYSTEMS	BC 1705.21
2.	FIRE-RESISTANT PENETRATIONS AND JOINTS	BC 1705.17

(TR-1) PROGRESS INSPECTIONS:

1.	ENERGY CODE COMPLIANCE INSPECTIONS	BC 110.3.5
2.	FINAL	BC 110.5

(TR-8) ENERGY CODE PROGRESS INSPECTIONS:

1.	HVAC-R AND SERVICE WATER HEATING EQUIPMENT	(IB3), (IIB3)
2.	HVAC-R AND SERVICE WATER HEATING CONTROLS	(IB4), (IIB4)
3.	HVAC-R AND SERVICE WATER PIPING DESIGN AND INSULATION	(IB5), (IIB5)
4.	MAINTENANCE INFORMATION	(ID1), (IID1)
5.	SHUTOFF DAMPERS	(IIB2)

GENERAL NOTES

1. ALL WORK SHALL CONFORM TO THE RULES AND REGULATIONS. CODES AND ORDINANCES OF FEDERAL, STATE AND LOCAL GOVERNMENTAL AGENCIES HAVING JURISDICTION OVER THE PROJECT, NO WORK SHOWN SPECIFIED OR IMPLIED SHALL BE CONSTRUCTED TO CONFLICT WITH ANY GOVERNMENT AGENCY OR BUILDING AUTHORITY MANDATE.
2. NO WORK SHALL BEGIN UNTIL A BUILDING PERMIT HAS BEEN ISSUED.
3. GENERAL CONTRACTOR SHALL PROVIDE GENERAL LIABILITY INSURANCE, WORKMEN COMPENSATION INSURANCE AND DISABILITY INSURANCE BEFORE PERFORMING ANY WORK IN THIS BUILDING.
4. THE CONTRACTOR SHALL INSPECT THE SITE AND CHECK AND VERIFY EXISTING AND PROPOSED CONDITIONS BEFORE STARTING ANY WORK. THE CONTRACTOR SHALL BRING THE DISCREPANCIES TO THE ARCHITECT'S OR ENGINEER'S ATTENTION BY WRITING PRIOR TO SUBMIT ANY QUOTES OR ESTIMATES PRIOR TO COMMENCING WORK.
5. ALL NEW WORK CONFORMS TO THE NEW YORK STATE ENERGY CODE.
6. ALL FEES, PERMITS APPLICATIONS, INSPECTIONS, CERTIFICATES AND SIGN–OFF SHALL BE SECURED BY THE CONTRACTOR AND PAID FOR BY THE OWNER UNLESS OTHERWISE NOTED.
7. ALL NOTES HEREIN MENTIONED ALONG WITH THOSE ON THE VARIOUS DRAWINGS SHALL APPLY TO ALL DRAWINGS AND IS PART OF THE CONTRACT.
8. THE CONTRACTOR SHALL PROVIDE ALL THE LABOR AND MATERIAL NECESSARY FOR THE COMPLETION OF THE WORK AS SHOWN ON THE DRAWINGS.
9. THE CONTRACTOR SHALL CARRY OUT ALL THE WORK IN A FIRST CLASS WORKMAN–LIKE MANNER. HE SHALL MAINTAIN A SAFE. CLEAN JOB SITE AT ALL TIMES, FREE FROM DEBRIS ACCUMULATION, AND SHALL LEAVE THE JOB SITE BROOM CLEAN AT THE COMPLETION OF THE PROJECT.
10. THE CONTRACTOR SHALL BE SOLELY RESPONSIBLE FOR ANY AND ALL DAMAGE TO NEW OR EXISTING CONDITIONS CAUSED BY HIMSELF, HIS WORKMEN OR HIS SUBCONTRACTOR. HE SHALL REPAIR SUCH DAMAGE AT NO ADDITIONAL COST TO THE OWNER UNLESS OTHERWISE NOTED IN WRITING PRIOR TO STARTING WORK.
11. ALL MATERIALS AND CONSTRUCTION TO BE INCORPORATED IN THE WORK SHALL BE IN STRICT ACCORDANCE WITH THE LATEST EDITION OF THE ASTM SPECIFICATIONS APPLICABLE AND TO CONFORM TO THE STANDARDS AND RECOMMENDATIONS OF THE VARIOUS TRADE INSTITUTES (ACI, AISC, ETC.) WHERE APPLICABLE. ALL MATERIALS INCORPORATED INTO THE WORK SHALL BE NEW AND FREE FROM DEFECTS UNLESS OTHERWISE NOTED.
12. CONTRACTORS SHALL BE RESPONSIBLE FOR ADEQUATELY BRACING AND PROTECTING ALL WORK DURING CONSTRUCTION AGAINST DAMAGE, BREAKAGE, COLLAPSE, DISTORTIONS, STANDARDS AND GOOD PRACTICE. CONTRACTOR AGREES THAT HE SHALL ASSUME SOLE AND COMPLETE RESPONSIBILITY FOR THE SITE CONDITIONS DURING THE COURSE OF CONSTRUCTION OF THIS PROPERTY, THAT REQUIREMENT SHALL APPLY CONTINUOUSLY AND NOT BE LIMITED TO NORMAL WORKING HOUR THE CONTRACTOR SHALL DEFEND, INDEMNIFY & HOLD THE ARCHITECT OR ENGINEER HARMLESS FROM ANY ALL LIABILITY, REAL OR ALLEGED IN CONNECTION WITH THE PERFORMANCE OF WORK ON THIS PROJECT.
13. THE ARCHITECT OR ENGINEER OF DESIGN HAS NOT BEEN RETAINED FOR ANY FILED SUPERVISION OR INSPECTION. HIS RESPONSIBILITY IS LIMITED TO THE ACCURACY OF THE PLANS.
14. MATERIALS NOT SPECIFIED BY THEIR MAKE, STYLE, COLORS ETC. SHALL BE APPROVED BY THE OWNER PRIOR TO PURCHASING AND INSTALLATION BY CONTRACTORS.
15. THIS PLAN IS APPROVED ONLY FOR WORK INDICATED ON THE APPLICATION SPECIFICATION SHEET. ALL OTHER MATTERS SHOWN ARE NOT TO BE RELIED UPON, OR TO BE CONSIDERED AS EITHER–BEING APPROVED OR IN ACCORDANCE WITH APPLICABLE CODES.

BUILDING DEPARTMENT NOTES:

1. ALL CONSTRUCTION SHALL CONFORM TO THE REQUIREMENTS OF THE NEW YORK CITY ADMINISTRATIVE BUILDING CODE EFFECTIVE 2022 AND AMENDMENTS THERETO.
2. GENERAL CONTRACTOR SHALL OBTAIN GENERAL LIABILITY INSURANCE, WORKMEN'S COMPENSATION INSURANCE AND DISABILITY INSURANCE BEFORE PERFORMING ANY WORK.
3. ALL NEW WORK SHALL CONFORM TO THE NEW YORK CITY ENERGY CODE.
4. ALL FEES, PERMITS, APPLICATIONS, INSPECTIONS CERTIFICATION, SIGN–OFFS SHALL BE SECURED AND PAID FOR BY THE CONTRACTOR.
5. THE GENERAL CONTRACTOR SHALL PROVIDE ALL THE LABOR AND MATERIAL FOR THE COMPLETION OF THE WORK AS SHOWN ON THE DRAWINGS AND SPECIFICATIONS.
6. SAFETY OF PUBLIC AND PROPERTY DURING CONSTRUCTION OPERATIONS SHALL BE IN ACCORDANCE WITH ARTICLE 1B.
7. THE WORK SHOWN ON THE DRAWINGS DO NOT INCLUDE CHANGE OF EGRESS, USE OR OCCUPANCY

MECHANICAL CODE NOTES:

1. ENERGY CODE COMPLIANCE NOTE: TO THE BEST OF MY KNOWLEDGE, BELIEF, AND PROFESSIONAL JUDGMENT, THE PLANS AND SPECIFICATIONS ARE IN COMPLIANCE WITH THE 2020 NYC ECC
2. PERMITS: CONTRACTOR SHALL FILE FOR AND OBTAIN PERMITS FOR ALL MECHANICAL SYSTEMS. PERMITS SHALL COMPLY WITH 2022 MECHANICAL CODE, SECTION MC105 AND WITH 2022 ADMINISTRATIVE CODE, TITLE 28 – ARTICLE 105.
3. LISTING AND LABELING OF APPLIANCES: ALL APPLIANCES REGULATED BY THE 2022 MECHANICAL CODE SHALL BE LISTED AND LABELED AS REQUIRED UNDER MC301.7 AND MC301.9
4. VIBRATION ISOLATION: ALL MECHANICAL EQUIPMENT AND APPLIANCES SHALL BE PROVIDED WITH SUPPORTED AND RESTRAINT AS REQUIRED UNDER 2022 MECHANICAL CODE SECTION 313
5. FIRE STOPPING COMPLIANCE: FIRE STOPPING AT CONSTRUCTION PENETRATIONS SHALL COMPLY WITH 2022 MECHANICAL CODE SECTION MC602.5 AND 2014 BUILDING CODE SECTION BC 714
6. DUCT SYSTEMS: DUCT SYSTEMS USED FOR THE MOVEMENT OF AIR IN HVAC SYSTEMS SHALL COMPLY WITH 2022 MECHANICAL CODE CHAPTER 6. DUCT INSULATION SHALL MEET THE REQUIREMENTS OF MC 604 AND THE ENERGY CONSERVATION CONSTRUCTION CODE OF NEW YORK STATE
7. MATERIALS: MATERIALS MUST BE USED, TESTED AND APPROVED FOR USE IN ACCORDANCE TO 2022 ADMINISTRATIVE CODE, ARTICLE 113.

HVAC BUILDING DEPARTMENT NOTES:

1. A CONTROLLED INSPECTION AND TEST WILL BE CONDUCTED UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER OR ARCHITECT OR OTHER PERSON HAVING NOT LESS THAN (5) YEARS EXPERIENCE SUPERVISING THE INSTALLATION OF VENTILATING SYSTEMS. THE TEST WILL SHOW COMPLIANCE WITH THE BUILDING ADMINISTRATIVE CODE AND REFERENCE STANDARDS.
2. THE LICENSED PROFESSIONAL ENGINEER OR ARCHITECT OR OTHER PERSON NOT HAVING LESS THAN (5) YEARS EXPERIENCE SUPERVISING THE INSTALLATION OF VENTILATING SYSTEMS AND CONDUCTING SUCH TESTS WILL FILE A CERTIFICATE AND REPORT OF TEST THAT THE SYSTEM COMPLIES WITH THE APPLICABLE LAWS.
3. A STATEMENT WILL BE FILED BY THE OWNER (OR TENANT) IN POSSESSION THAT THE VENTILATING SYSTEM WILL BE KEPT IN CONTINUOUS OPERATION DURING NORMAL OCCUPANCY OF THE PREMISES.
4. ALL FIRE DAMPERS ARE TO BE OF TYPE APPROVED BY THE BOARD OF FIRE UNDERWRITERS. WHERE ENTERING OR LEAVING SHAFTS, FIRE DAMPERS ARE TO BE EQUIVALENT TO WALL RATING.
5. THE LATEST RULES OF BUILDING CODES ARE TO BE COMPLIED WITH.
6. SMOKE AND FIRE DETECTION SYSTEMS TO BE INSTALLED IN ACCORDANCE WITH THE BUILDING ADMINISTRATIVE CODE AND REFERENCE STANDARDS.

CERTIFICATE OF COMPLIANCE BY CONTRACTOR:

1. CERTIFICATE OF COMPLIANCE SHALL BE OBTAINED BY CONTRACTOR IN ACCORDANCE WITH THE ADMINISTRATIVE CODE.
2. M.E.A. AND B.S. & A. NUMBERS FOR EQUIPMENT SHALL BE SUBMITTED AS REQUIRED BY THE BUILDING CODE.
3. CERTIFICATE OF COMPLIANCE SHALL BE REQUIRED FOR THE USE AND OPERATION OF SERVICE EQUIPMENT INCLUDING BUT NOT LIMITED TO:
   a. AIR CONDITIONING EQUIPMENT
   b. VENTILATION SYSTEMS

SERVICE EQUIPMENT PERMIT:

AS PER 2022 BUILDING CODE SECTION BC106.2, SERVICE EQUIPMENT PERMITS ARE REQUIRED FOR THE INSTALLATION OR ALTERNATION OF SERVICE EQUIPMENT, INCLUDING BUT NOT LIMITED TO AIR CONDITIONING AND VENTILATION SYSTEMS.

ASBESTOS NOTE:

THE CLIENT SHALL HAVE THE DUTY TO INFORM THE ENGINEER OF THE PRESENCE OF ASBESTOS AND OTHER TOXIC SUBSTANCES THAT ARE KNOWN OR ARE OF A REASONABLE CONCERN. IF ASBESTOS OR OTHER TOXIC SUBSTANCES ARE DISCOVERED BY THE ENGINEER TO BE PRESENT OR HAVE A LIKELIHOOD OF BEING PRESENT DURING WORK DONE TO THE PROJECT, HE SHALL, IN HIS OWN DISCRETION, HAVE THE RIGHT TO SUSPEND WORK ON THE PROJECT. THE CLIENT SHALL PROMPTLY OBTAIN A QUALIFIED EXPERT TO SAFELY REMOVE OR SUPERVISE THE REMOVAL OF SUCH ASBESTOS OR TOXIC SUBSTANCES. THE CLIENT SHALL INDEMNIFY ENGINEERS, AGENTS, AND EMPLOYEES FROM ALL LIABILITY, INCLUDING BUT NOT LIMITED TO HARM CAUSED PEOPLE AND THE COST OF LEGAL FEES THAT RESULT FROM EXPOSURE TO ASBESTOS AND OTHER TOXIC SUBSTANCES.

BUILDING CLASSIFICATION STATEMENT (MC 106.4):

WHERE APPLICABLE TO THE PROPOSED WORK, THE STATEMENT SHALL IDENTIFY:

1. THE OCCUPANCY GROUP OR GROUPS THAT APPLY TO THE PARTS OF THE BUILDING IN ACCORDANCE WITH SECTION 302 OF THE NEW YORK CITY BUILDING CODE;
2. THE OCCUPANCY GROUP OF THE MAIN USE OR DOMINANT OCCUPANCY OF THE BUILDING;
3. THE CONSTRUCTION CLASS OF THE BUILDING IN ACCORDANCE WITH SECTION 602 OF THE NEW YORK CITY BUILDING CODE;
4. THE STRUCTURAL OCCUPANCY/RISK CATEGORY IN ACCORDANCE WITH TABLE 1604.5 OF THE NEW YORK CITY BUILDING CODE;
5. THE HEIGHT OF THE BUILDING AS DEFINED IN SECTION 502.1 OF THE NEW YORK BUILDING CODE;
6. THE APPLICABLE MEASUREMENTS TO THE HIGHEST AND LOWEST LEVEL OF THE FIRE DEPARTMENT ACCESS; AND
7. WHETHER THE BUILDING IS INSIDE OR OUTSIDE OF THE FIRE DISTRICTS.

MECHANICAL ABBREVIATIONS

A	AMPERES	KX	KITCHEN EXHAUST
AC	AIR CONDITIONER	L	LENGTH
ACC	AIR COOLED CONDENSER	LAT	LEAVING AIR TEMPERATURE
ACS	AUTOMATIC CONTROL SYSTEM	LBS	POUNDS
ACU	AIR CONDITIONING UNIT	LDB	LEAVING DRY BULB
AD	ACCESS DOOR	LF	LINEAR FEET
AFF	ABOVE FINISHED FLOOR	LWB	LEAVING WET BULB
AHU	AIR HANDLING UNIT	LWT	LEAVING WATER TEMPERATURE
AL	ALUMINUM	MAX.	MAXIMUM
AP	ACCESS PANEL	MB	MIXING BOX
BF	BOOSTER FAN	MBH	THOUSAND BTU PER HOUR
BG	BOTTOM OF GRILLE	MER	MECHANICAL EQUIPMENT ROOM
BHP	BRAKE HORSE POWER	MHP	MOTOR HORSE POWER
BMS	BUILDING MANAGEMENT SYSTEM	MIN.	MINIMUM
BR	BOTTOM OF REGISTER	MM	MILLIMETER
BT	BOTTOM OF THROAT	NC	NORMALLY CLOSED
BTU	BRITISH THERMAL UNIT	NO	NORMALLY OPEN
BTU/H	BTU PER HOUR	NIC	NOT IN CONTRACT
CC	COOLING COIL	NO.	NUMBER
CD	CEILING DIFFUSER	NTS	NOT TO SCALE
CFM	CUBIC FEET PER MIN	OA	OUTSIDE AIR
CV	CONSTANT VOLUME	OAI	OUTSIDE AIR INTAKE
CVR	CONSTANT VOLUME REGULATOR	OD	OUTSIDE DIAMETER
CP	CONDENSATE PUMP	PD	PRESSURE DROP
D	DEPTH	PF	PREFILTER
DIA.	DIAMETER	PRV	PRESSURE REDUCING VALVE
DN	DOWN	PSI	POUNDS PER SQUARE INCH
DWG	DRAWING	PSIA	ABSOLUTE PSI
EA	EXHAUST AIR	PSIG	GAUGE PSI
EAT	ENTERING AIR TEMPERATURE	R	RISE
EDB	ENTERING DRY BULB TEMPERATURE	RA	RETURN AIR
EX.	EXISTING	RH	RELATIVE HUMIDITY
EL.	ELEVATION	RHC	REHEAT COIL
ELEC.	ELECTRICAL	RM	ROOM
EQ	EQUAVALENT	RPM	REVOLUTIONS PER MINUTE
EWB	ENTERING WET BULB TEMPERATURE	SA	SUPPLY AIR
EXH	EXHAUST	SF	SUPPLY FAN
EXP	EXPANSION	SLD	STRIPLINE DIFFUSER
°F	DEGREES FAHRENHEIT	SP	STATIC PRESSURE
FA	FREE AREA (FT^2)	SPEC.	SPECIFICATION
FC	FLEXIBLE CONNECTION	SS	STAINLESS STEEL
FD	FIRE DAMPER	T	TEMPERATURE
FG	FINISHED GRADE	TF	TERMINAL FILTER
FF	FINISHED FLOOR	TG	TOP OF GRILL
FLA	FULL LOAD AMPERES	TR	TOP OF REGISTER
FO	FUEL OIL	TRD	TRANSFER DUCT
FOR	FUEL OIL RETURN	TRF	TRANSFER FAN
FOS	FUEL OIL SUPPLY	TRG	TRANSFER GRILL
FPM	FEET PER MINUTE	TV	TURNING VANE
FPI	FINS PER INCH	TX	TOILET EXHAUST
FPS	FEET PER SECOND	TYP.	TYPICAL
FR	FLOOR REGISTER	UON	UNLESS OTHERWISE NOTED
FT	FEET	V	VOLTS
FTR	FINNED TUBE RADIATION	W	WIDTH
GA.	GAUGE	W/	WITH
GAL.	GALLON	W/O	WITHOUT
GPM	GALLONS PER MINUTE	WB	WET BULB
HC	HEATING COIL	WC	WATER COLUMN
HR	HOUR	WG	WATER GAUGE
HUM.	HUMIDIFIER	WMS	WIRE MESH SCREEN
HZ	HERTZ	WP	WORKING PRESSURE
ID	INNER DIAMETER	WSA	WIRE SIZE AMPS
IN.	INCH/INCHES	VA	VENTILATION AIR
KW	KILOWATT		

PROFESSIONAL STATEMENT

THE PROJECT REGISTERED DESIGN PROFESSIONAL IN CHARGE WILL PERFORM REVIEWS/QUALITY CHECKS FOR THE BUILDING RELATING TO ENERGY COMPLIANCE. A REQUIRED STATEMENT FROM THE ARCHITECT (OR MULTIPLE STATEMENTS FROM THE DESIGNERS, ARCHITECT & ENGINEERS) WILL BE SUBMITTED, SHOWING THAT THE ITEM(S) UNDER THEIR RESPONSIBILITY WERE REVIEWED FOR ENERGY COMPLIANCE BY THE BUILDING INSPECTOR. SUCH REVIEWS BUILDING INSPECTOR FOR THEIR REVIEW. ALL REQUIRED ENERGY STATEMENTS WILL BE LISTED IN THE PLANS. NARRATIVES MUST BE SUBMITTED AS A DOCUMENT IN THE SUBMITTAL PACKAGE REFERENCING THE APPROPRIATE DRAWING.

NYC BUILDING DEPARTMENT APPROVAL NOTE

THIS PLAN SHALL BE APPROVED ONLY FOR WORK INDICATED ON THE SPECIFICATION SHEET. ALL OTHER WORK MATTERS. ALL UNSPECIFIED WORK SHALL NOT BE CONSIDERED AS APPROVED OR IN ACCORDANCE WITH APPLICABLE CODES

FLOOD ZONE STATEMENT

PROPERTY IS NOT IN A SPECIAL FLOOD HAZARD AREA (SFHA)

ENERGY CODE ANALYSIS STATEMENT

TO THE BEST OF MY KNOWLEDGE, BELIEF AND PROFESSIONAL JUDGEMENT, ALL WORK DONE UNDER THIS APPLICATION IS COMPLIANT TO THE NEW YORK CITY ENERGY CONSERVATION CODE

TENANT STATEMENT

CONTRACTORS SHALL PROVIDE A MINIMUM OF 4 DAYS NOTICE FOR ANY REQUIRED BUILDING SHUTDOWNS.

MECHANICAL SYMBOLS

- SINGLE LINE DUCTWORK – NEW
- SINGLE LINE DUCTWORK – EXISTING
- SINGLE LINE DUCTWORK – DEMO
- SINGLE LINE DUCTWORK W/ ACOUSTICAL LINING
- DUCT UNDER POSITIVE PRESSURE
- DUCT UNDER NEGATIVE PRESSURE (EXHAUST)
- DUCT UNDER NEGATIVE PRESSURE (RETURN)
- CEILING DIFFUSER GRILL
- CEILING EXHAUST GRILL
- CEILING RETURN GRILL / PLENUM RETURN
- T THERMOSTAT
- TS TEMPERATURE SENSOR
- SW SWITCH
- CP CONDENSATE PUMP
- POINT OF CONNECTION
- POINT OF DISCONNECTION
- FD/AD FIRE DAMPER W/ ACCESS DOOR
- FSD/AD FIRE/SMOKE DAMPER W/ ACCESS DOOR
- PSD/AD POST SMOKE DAMPER W/ ACCESS DOOR
- MD MOTORIZED DAMPER
- BD BACKDRAFT DAMPER
- VD VOLUME DAMPER
- (XX) CFM VALUE
- (N) NEW
- (E) EXISTING
- (R) RELOCATED
- (D) DEMOLISH

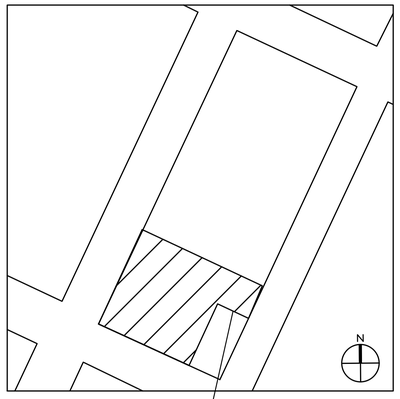

1 PLOT PLAN
N.T.S.

ZONING INFORMATION

36–49 11TH ST
MANHATTAN, NY 11106
BLOCK: 352 LOT: 1
PUBLIC FACILITIES & INSTITUTIONS

ZONING: R5D
ZONING MAP: 9A
LOT SIZE = 81,200 SQFT

PROPOSED WORK DO NOT CHANGE ZONING RESOLUTION.

DRAWINGS LIST

M001.00	MECHANICAL NOTES, SYMBOLS, DRAWINGS LIST, AND SITE PLAN
M051.00	MECHANICAL EXISTING PARTIAL FIRST FLOOR PLAN
M052.00	MECHANICAL EXISTING PARTIAL ROOF PLAN
M101.00	MECHANICAL PROPOSED PARTIAL FIRST PLAN
M102.00	MECHANICAL PROPOSED ROOF PLAN
M401.00	MECHANICAL SCHEDULE-1
M402.00	MECHANICAL SCHEDULE-2
M501.00	MECHANICAL DETAIL-1
M502.00	MECHANICAL DETAIL-2
M601.00	MECHANICAL SPECIFICATIONS
EN001.00	ENERGY CODE COMPLIANCE

ALL CITY ENGINEERING, P.C.

OWNER:

SITE PLAN



DoB STAMPS:

No.	DATE	REVISION

NOTE: Drawing may be printed at reduced scale

IT IS A VIOLATION OF THE STATE EDUCATION LAW SECTION 7209 (2) FOR ANY PERSON TO ALTER AN ITEM IN ANY WAY UNLESS SUCH PERSON IS ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER, AND THE ENGINEER STAMPS SUCH CHANGES

PROJECT:
36-49 11TH STREET
LONG ISLAND CITY , NY 11106
BLOCK: 352 LOT: 1

DRAWING TITLE:
MECHANICAL NOTES, SYMBOLS, DRAWING LIST, AND SITE PLAN

DATE:	04/08/2025
PROJECT No.:	25031
DRAWN BY:	EL
CHECKED BY:	KX

SEAL AND SIGNATURE

DWG. No.: M-001.00

Sheets: 01 of 11

D.O.B NOW JOB No. :
X

DUCTWORK NOTES:

1. PROVIDE MIN. 24 GAGE FOR GENERAL DUCTWORK
2. ALL INTAKE OPENING LOCATIONS SHALL COMPLY WITH 2022 MC SECTION 401.4
3. ALL EXHAUST OUTLET LOCATION SHALL COMPLY WITH 2022 MC SECTION 501.3.1
4. PROVIDE MIN. 1.5" INSULATION FOR ALL DUCTWORK DEDICATED FOR OA
5. PROVIDE MIN. 1.5" INSULATION FOR ALL CONCEALED DUCTWORK DEDICATED FOR AC SUPPLY
6. PROVIDE 1.5" ACOUSTICAL LINING FOR AC DUCTWORK
7. ALL INTERIOR AND EXTERIOR MECHANICAL EQUIPMENT SHALL COMPLY WITH 2022 MC SECTION 928
8. ALL DUCTWORK WITH A CROSS-SECTIONAL AREA OF 20 IN^2 OR LESS PASSING THROUGH FIRE-RATED ASSEMBLIES EXCEPT FIRE WALLS SHALL NOT REQUIRE FIRE DAMPERS OR FIRE SMOKE DAMPERS, AS PER 2022 MC 607.1.1 & 2022 BC SECTION 716.5
9. PROVIDE ACCESS DOOR FOR ALL FIRE DAMPER, FIRE/SMOKE DAMPER AND POST-FIRE SMOKE DAMPER
10. ALL OUTSIDE AIR INTAKE AND EXHAUST MOTORIZED DAMPERS SHALL BE CLASS I LEAKAGE TYPE
11. DUCT CONSTRUCTION AND INSTALLATION SHALL STRICTLY FOLLOW ANSI/SMACNA 006-2020 STANDARD.
12. PROVIDE VOLUME DAMPER/CORD OPERATED DAMPER FOR EVERY BRANCH OF DUCTWORK.

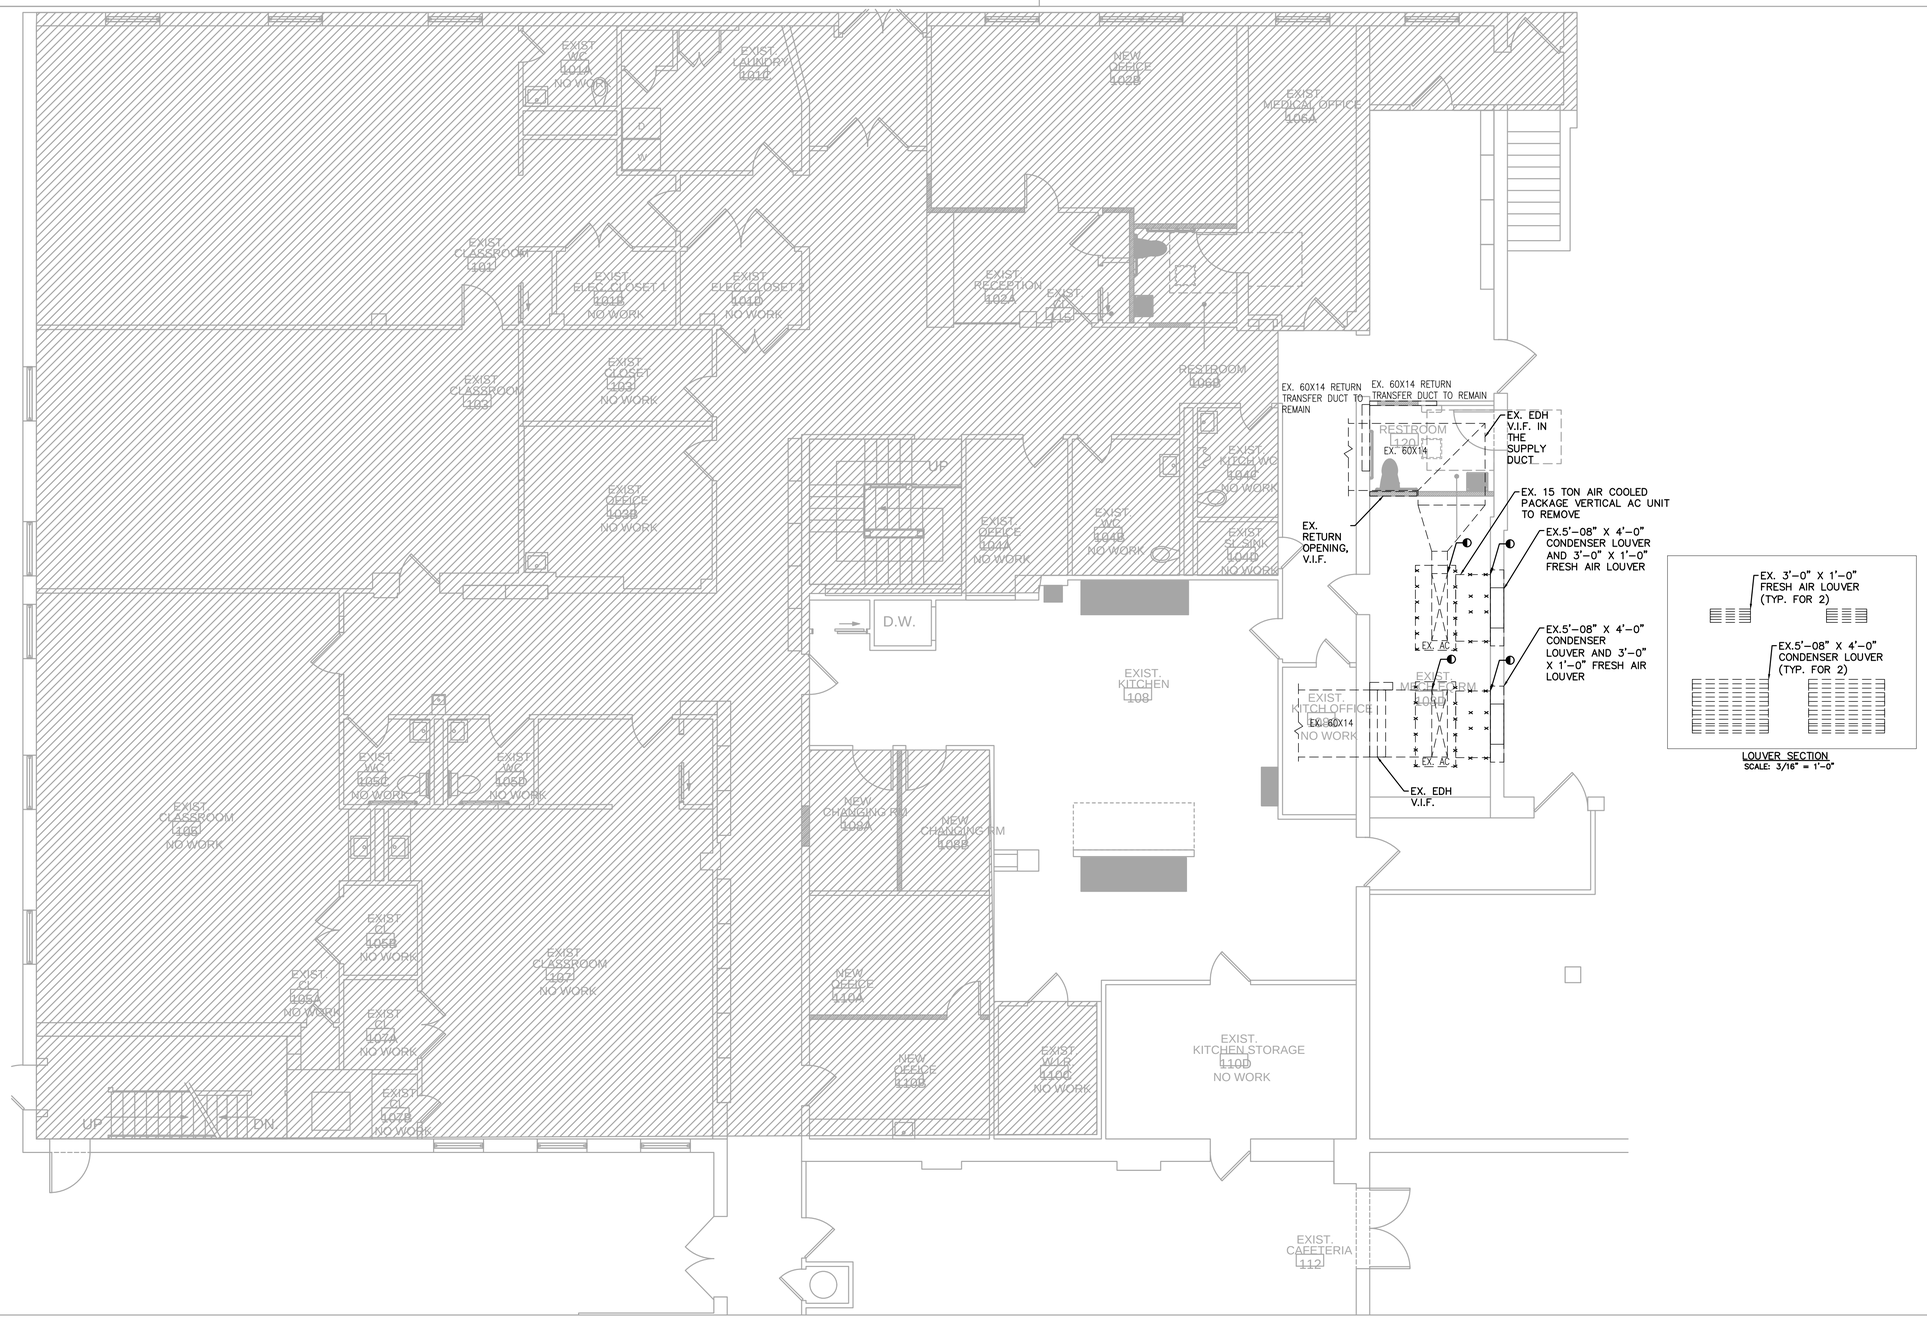

MECHANICAL EXISTING PARTIAL FRIST FLOOR PLAN

SCALE: 3/16" = 1'-0"

ALL CITY ENGINEERING, P.C.

OWNER:

SITE PLAN



DoB STAMPS:

No.	DATE	REVISION

NOTE: Drawing may be printed at reduced scale

IT IS A VIOLATION OF THE STATE EDUCATION LAW SECTION 7209 (2) FOR ANY PERSON TO ALTER AN ITEM IN ANY WAY UNLESS SUCH PERSON IS ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER, AND THE ENGINEER STAMPS SUCH CHANGES

PROJECT:

36-49 11TH STREET
LONG ISLAND CITY , NY 11106
BLOCK: 352 LOT: 1

DRAWING TITLE:

MECHANICAL EXISTING PARTIAL FIRST FLOOR PLAN

DATE:	04/08/2025
PROJECT No.:	25031
DRAWN BY:	EL
CHECKED BY:	KX

SEAL AND SIGNATURE

DWG. No.: M-051.00

Sheets: 02 of 11

D.O.B NOW JOB No. :

X

DUCTWORK NOTES:

1. PROVIDE MIN. 24 GAGE FOR GENERAL DUCTWORK
2. ALL INTAKE OPENING LOCATIONS SHALL COMPLY WITH 2022 MC SECTION 401.4
3. ALL EXHAUST OUTLET LOCATION SHALL COMPLY WITH 2022 MC SECTION 501.3.1
4. PROVIDE MIN. 1.5" INSULATION FOR ALL DUCTWORK DEDICATED FOR OA
5. PROVIDE MIN. 1.5" INSULATION FOR ALL CONCEALED DUCTWORK DEDICATED FOR AC SUPPLY
6. PROVIDE 1.5" ACOUSTICAL LINING FOR AC DUCTWORK
7. ALL INTERIOR AND EXTERIOR MECHANICAL EQUIPMENT SHALL COMPLY WITH 2022 MC SECTION 928
8. ALL DUCTWORK WITH A CROSS-SECTIONAL AREA OF 20 IN^2 OR LESS PASSING THROUGH FIRE-RATED ASSEMBLIES EXCEPT FIRE WALLS SHALL NOT REQUIRE FIRE DAMPERS OR FIRE SMOKE DAMPERS, AS PER 2022 MC 607.1.1 & 2022 BC SECTION 716.5
9. PROVIDE ACCESS DOOR FOR ALL FIRE DAMPER, FIRE/SMOKE DAMPER AND POST-FIRE SMOKE DAMPER
10. ALL OUTSIDE AIR INTAKE AND EXHAUST MOTORIZED DAMPERS SHALL BE CLASS I LEAKAGE TYPE
11. DUCT CONSTRUCTION AND INSTALLATION SHALL STRICTLY FOLLOW ANSI/SMACNA 006-2020 STANDARD.
12. PROVIDE VOLUME DAMPER/CORD OPERATED DAMPER FOR EVERY BRANCH OF DUCTWORK.

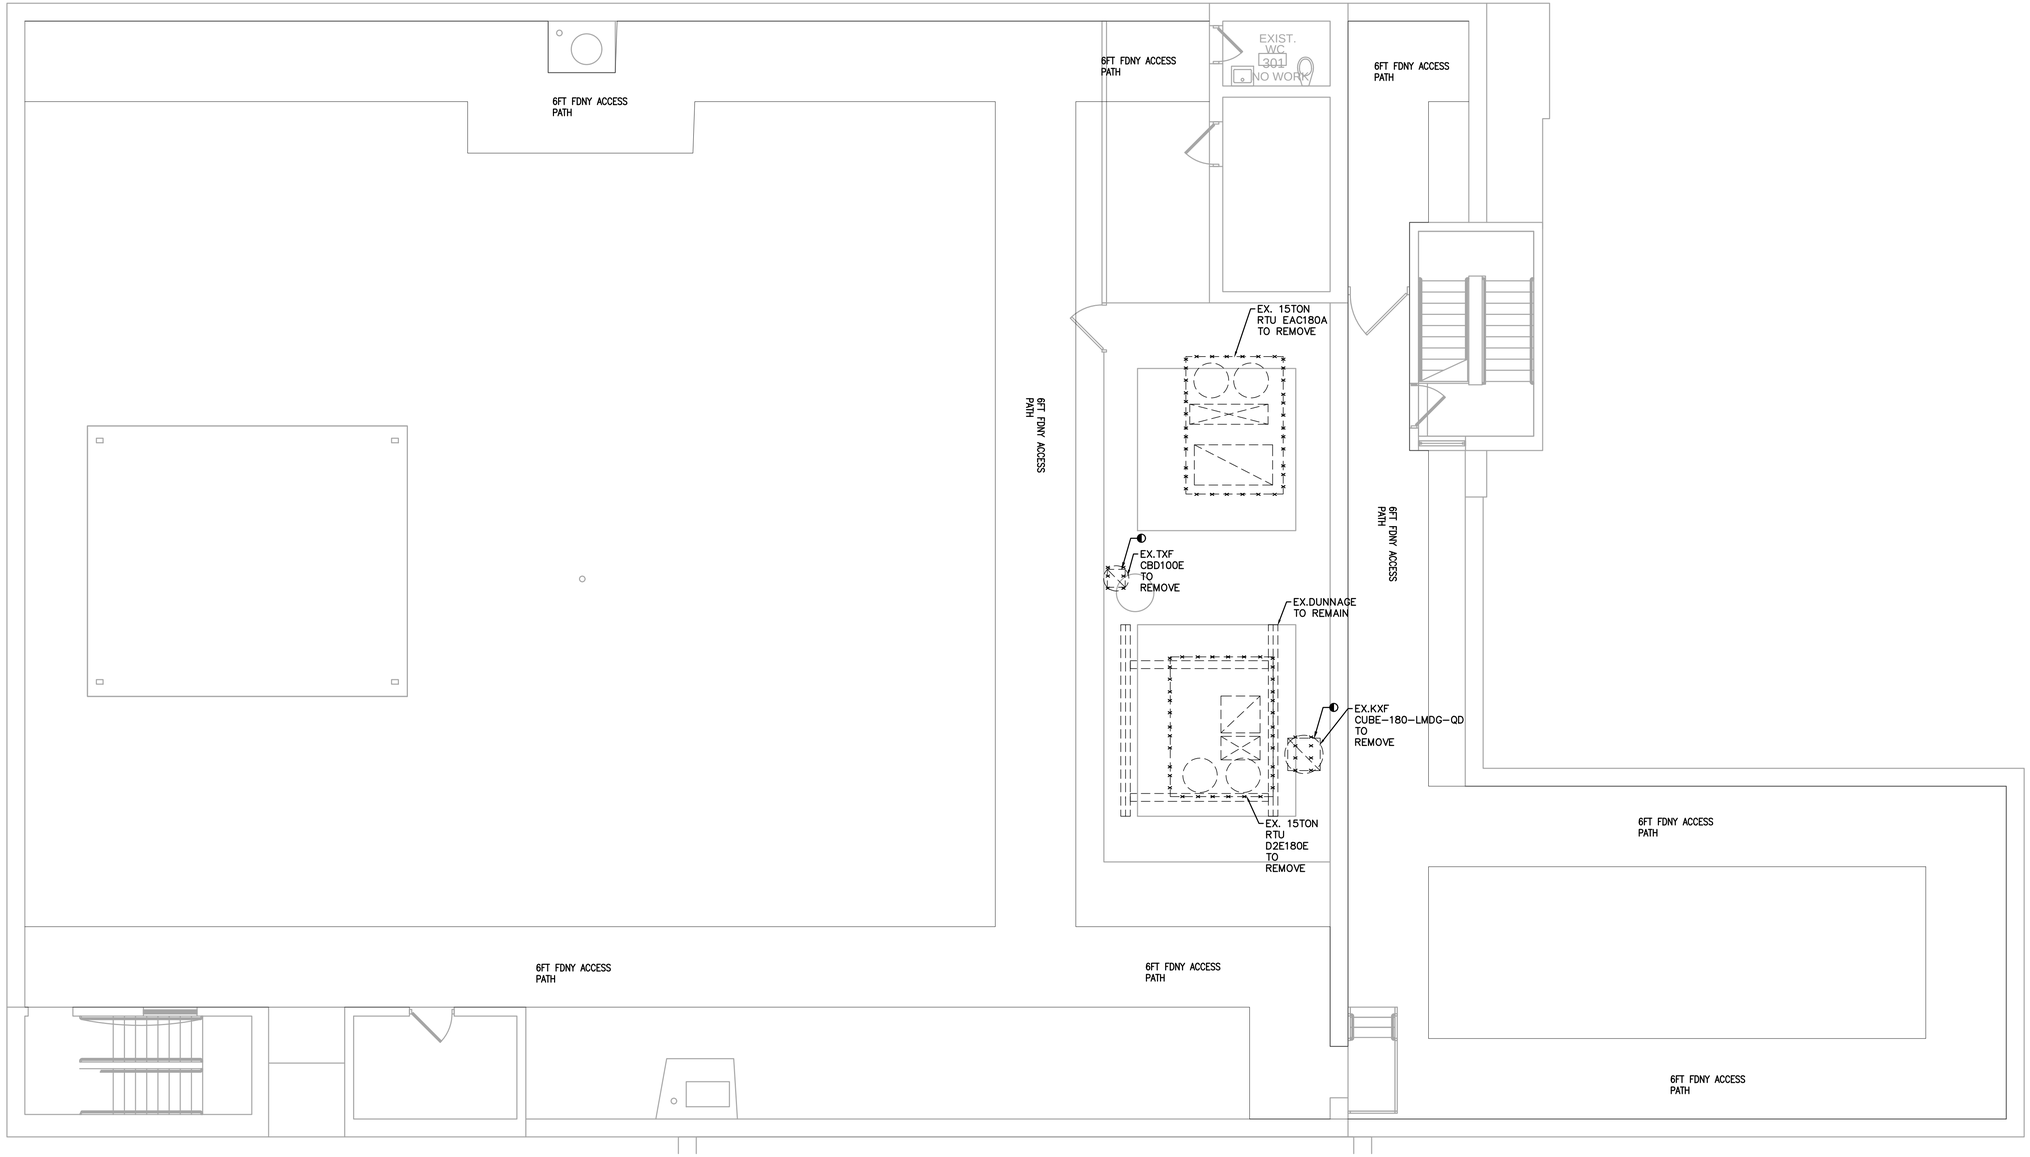

MECHANICAL EXISTING ROOF PLAN

SCALE: 3/16" = 1'-0"

ALL CITY ENGINEERING, P.C.

OWNER:

SITE PLAN



DoB STAMPS:

No.	DATE	REVISION

NOTE: Drawing may be printed at reduced scale

IT IS A VIOLATION OF THE STATE EDUCATION LAW SECTION 7209 (2) FOR ANY PERSON TO ALTER AN ITEM IN ANY WAY UNLESS SUCH PERSON IS ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER, AND THE ENGINEER STAMPS SUCH CHANGES

PROJECT:

36-49 11TH STREET
LONG ISLAND CITY , NY 11106
BLOCK: 352 LOT: 1

DRAWING TITLE:

MECHANICAL EXISTING ROOF PLAN

DATE:	04/08/2025
PROJECT No.:	25031
DRAWN BY:	EL
CHECKED BY:	KX

SEAL AND SIGNATURE

DWG. No.: M-052.00

Sheets: 03 of 11

D.O.B NOW JOB No. :
X

DUCTWORK NOTES:

1. PROVIDE MIN. 24 GAGE FOR GENERAL DUCTWORK
2. ALL INTAKE OPENING LOCATIONS SHALL COMPLY WITH 2022 MC SECTION 401.4
3. ALL EXHAUST OUTLET LOCATION SHALL COMPLY WITH 2022 MC SECTION 501.3.1
4. PROVIDE MIN. 1.5" INSULATION FOR ALL DUCTWORK DEDICATED FOR OA
5. PROVIDE MIN. 1.5" INSULATION FOR ALL CONCEALED DUCTWORK DEDICATED FOR AC SUPPLY
6. PROVIDE 1.5" ACOUSTICAL LINING FOR AC DUCTWORK
7. ALL INTERIOR AND EXTERIOR MECHANICAL EQUIPMENT SHALL COMPLY WITH 2022 MC SECTION 928
8. ALL DUCTWORK WITH A CROSS-SECTIONAL AREA OF 20 IN^2 OR LESS PASSING THROUGH FIRE-RATED ASSEMBLIES EXCEPT FIRE WALLS SHALL NOT REQUIRE FIRE DAMPERS OR FIRE SMOKE DAMPERS, AS PER 2022 MC 607.1.1 & 2022 BC SECTION 716.5
9. PROVIDE ACCESS DOOR FOR ALL FIRE DAMPER, FIRE/SMOKE DAMPER AND POST-FIRE SMOKE DAMPER
10. ALL OUTSIDE AIR INTAKE AND EXHAUST MOTORIZED DAMPERS SHALL BE CLASS I LEAKAGE TYPE
11. DUCT CONSTRUCTION AND INSTALLATION SHALL STRICTLY FOLLOW ANSI/SMACNA 006-2020 STANDARD.
12. PROVIDE VOLUME DAMPER/CORD OPERATED DAMPER FOR EVERY BRANCH OF DUCTWORK.

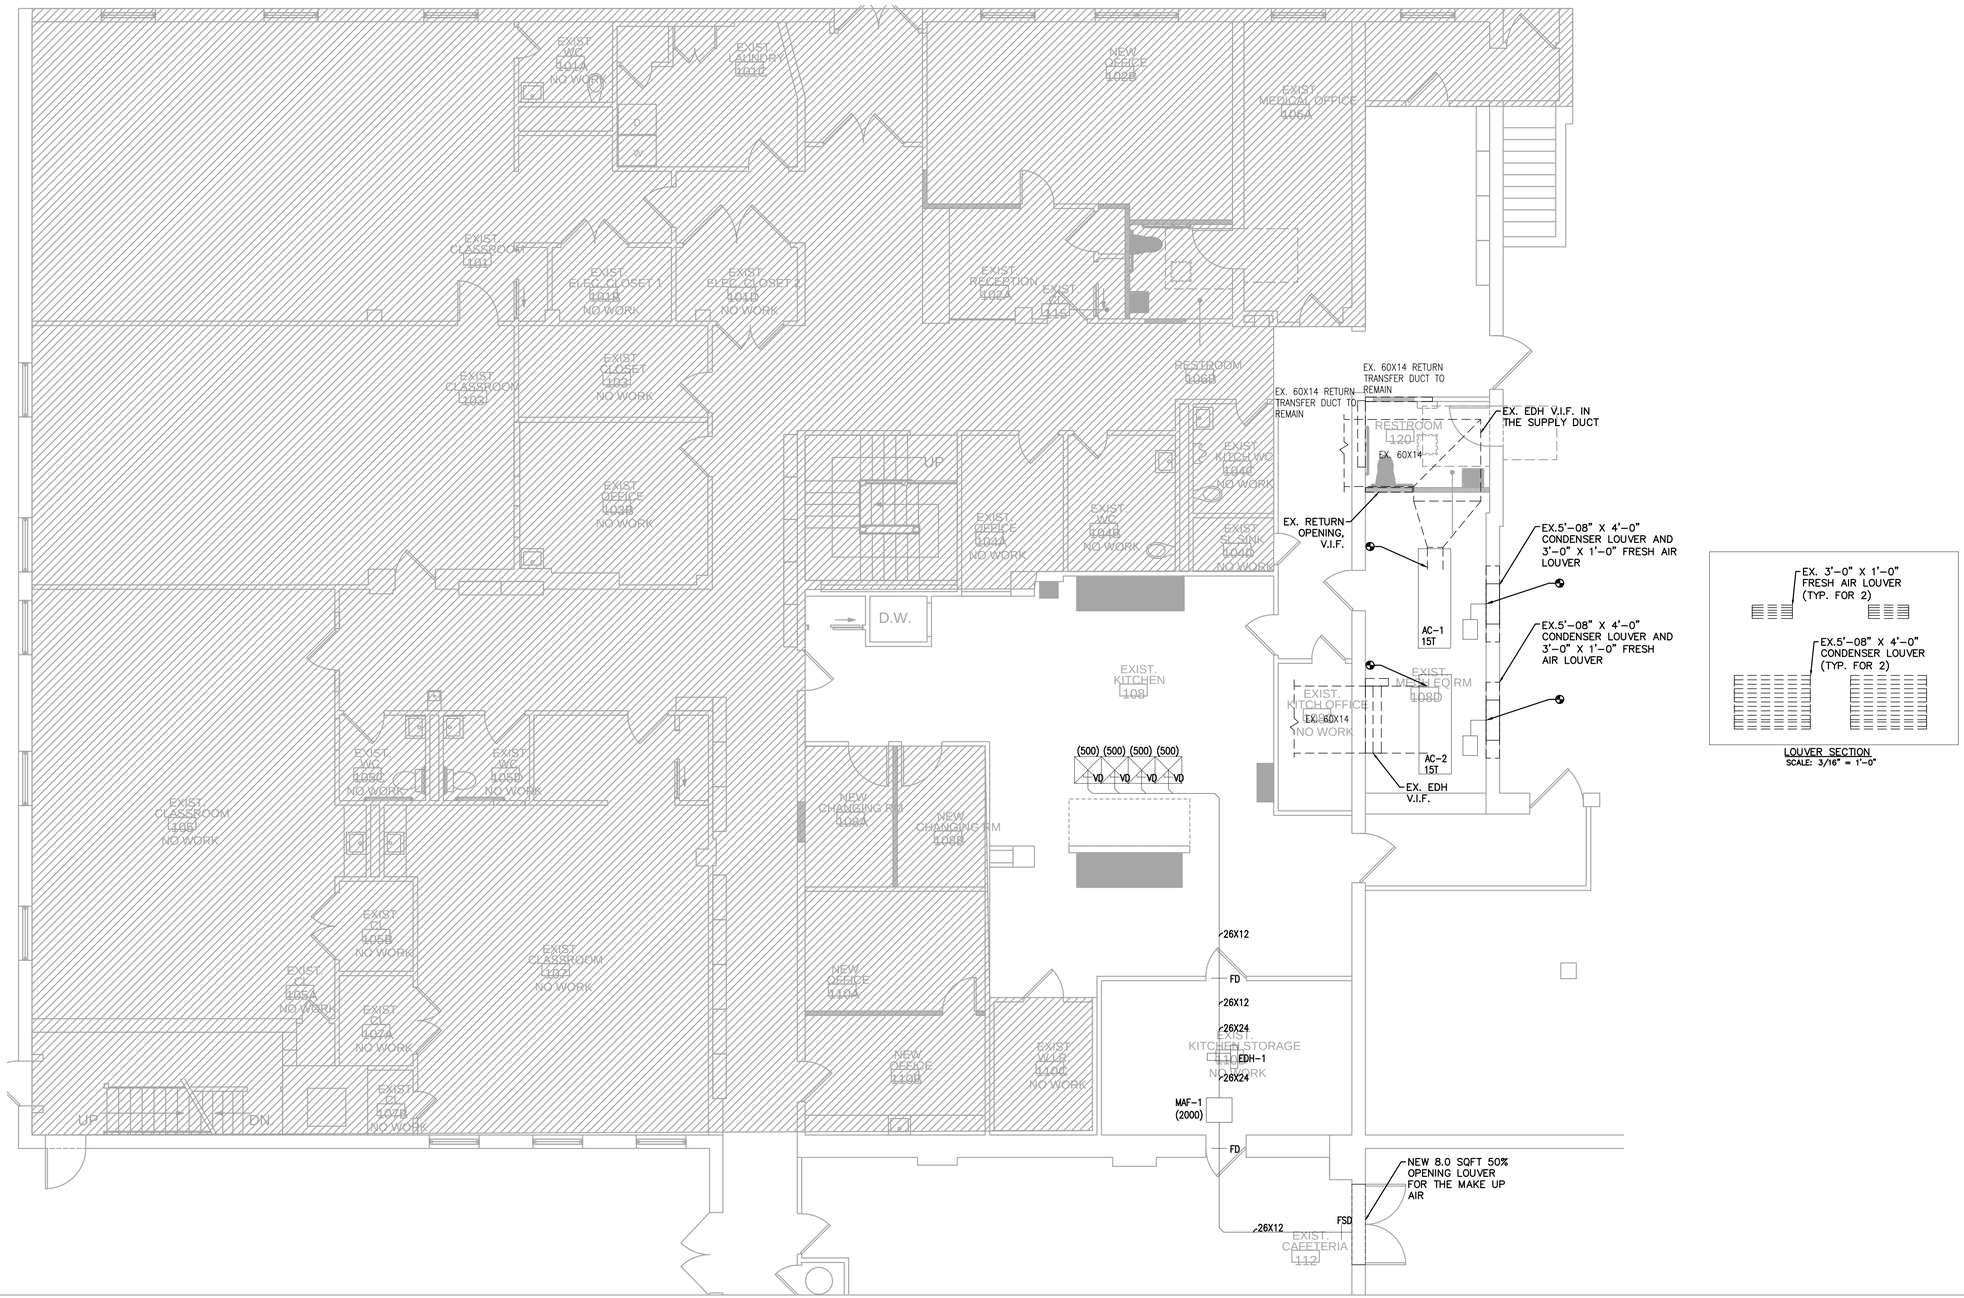

LOUVER SECTION
SCALE: 3/16" = 1'-0"

MECHANICAL PROPOSED PARTIAL FIRST FLOOR PLAN

SCALE: 3/16" = 1'-0"

ALL CITY ENGINEERING, P.C.

OWNER:

SITE PLAN



DoB STAMPS:

No.	DATE	REVISION

NOTE: Drawing may be printed at reduced scale

IT IS A VIOLATION OF THE STATE EDUCATION LAW SECTION 7209 (2) FOR ANY PERSON TO ALTER AN ITEM IN ANY WAY UNLESS SUCH PERSON IS ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER, AND THE ENGINEER STAMPS SUCH CHANGES

PROJECT:

36-49 11TH STREET
LONG ISLAND CITY , NY 11106
BLOCK: 352 LOT: 1

DRAWING TITLE:

MECHANICAL PROPOSED PARTIAL FIRST FLOOR PLAN

DATE:	04/08/2025
PROJECT No.:	25031
DRAWN BY:	EL
CHECKED BY:	KX

SEAL AND SIGNATURE

DWG. No.: M-101.00

Sheets: 04 of 11

D.O.B NOW JOB No. :

X

DUCTWORK NOTES:

1. PROVIDE MIN. 24 GAGE FOR GENERAL DUCTWORK
2. ALL INTAKE OPENING LOCATIONS SHALL COMPLY WITH 2022 MC SECTION 401.4
3. ALL EXHAUST OUTLET LOCATION SHALL COMPLY WITH 2022 MC SECTION 501.3.1
4. PROVIDE MIN. 1.5" INSULATION FOR ALL DUCTWORK DEDICATED FOR OA
5. PROVIDE MIN. 1.5" INSULATION FOR ALL CONCEALED DUCTWORK DEDICATED FOR AC SUPPLY
6. PROVIDE 1.5" ACOUSTICAL LINING FOR AC DUCTWORK
7. ALL INTERIOR AND EXTERIOR MECHANICAL EQUIPMENT SHALL COMPLY WITH 2022 MC SECTION 928
8. ALL DUCTWORK WITH A CROSS-SECTIONAL AREA OF 20 IN^2 OR LESS PASSING THROUGH FIRE-RATED ASSEMBLIES EXCEPT FIRE WALLS SHALL NOT REQUIRE FIRE DAMPERS OR FIRE SMOKE DAMPERS, AS PER 2022 MC 607.1.1 & 2022 BC SECTION 716.5
9. PROVIDE ACCESS DOOR FOR ALL FIRE DAMPER, FIRE/SMOKE DAMPER AND POST-FIRE SMOKE DAMPER
10. ALL OUTSIDE AIR INTAKE AND EXHAUST MOTORIZED DAMPERS SHALL BE CLASS I LEAKAGE TYPE
11. DUCT CONSTRUCTION AND INSTALLATION SHALL STRICTLY FOLLOW ANSI/SMACNA 006-2020 STANDARD.
12. PROVIDE VOLUME DAMPER/CORD OPERATED DAMPER FOR EVERY BRANCH OF DUCTWORK.

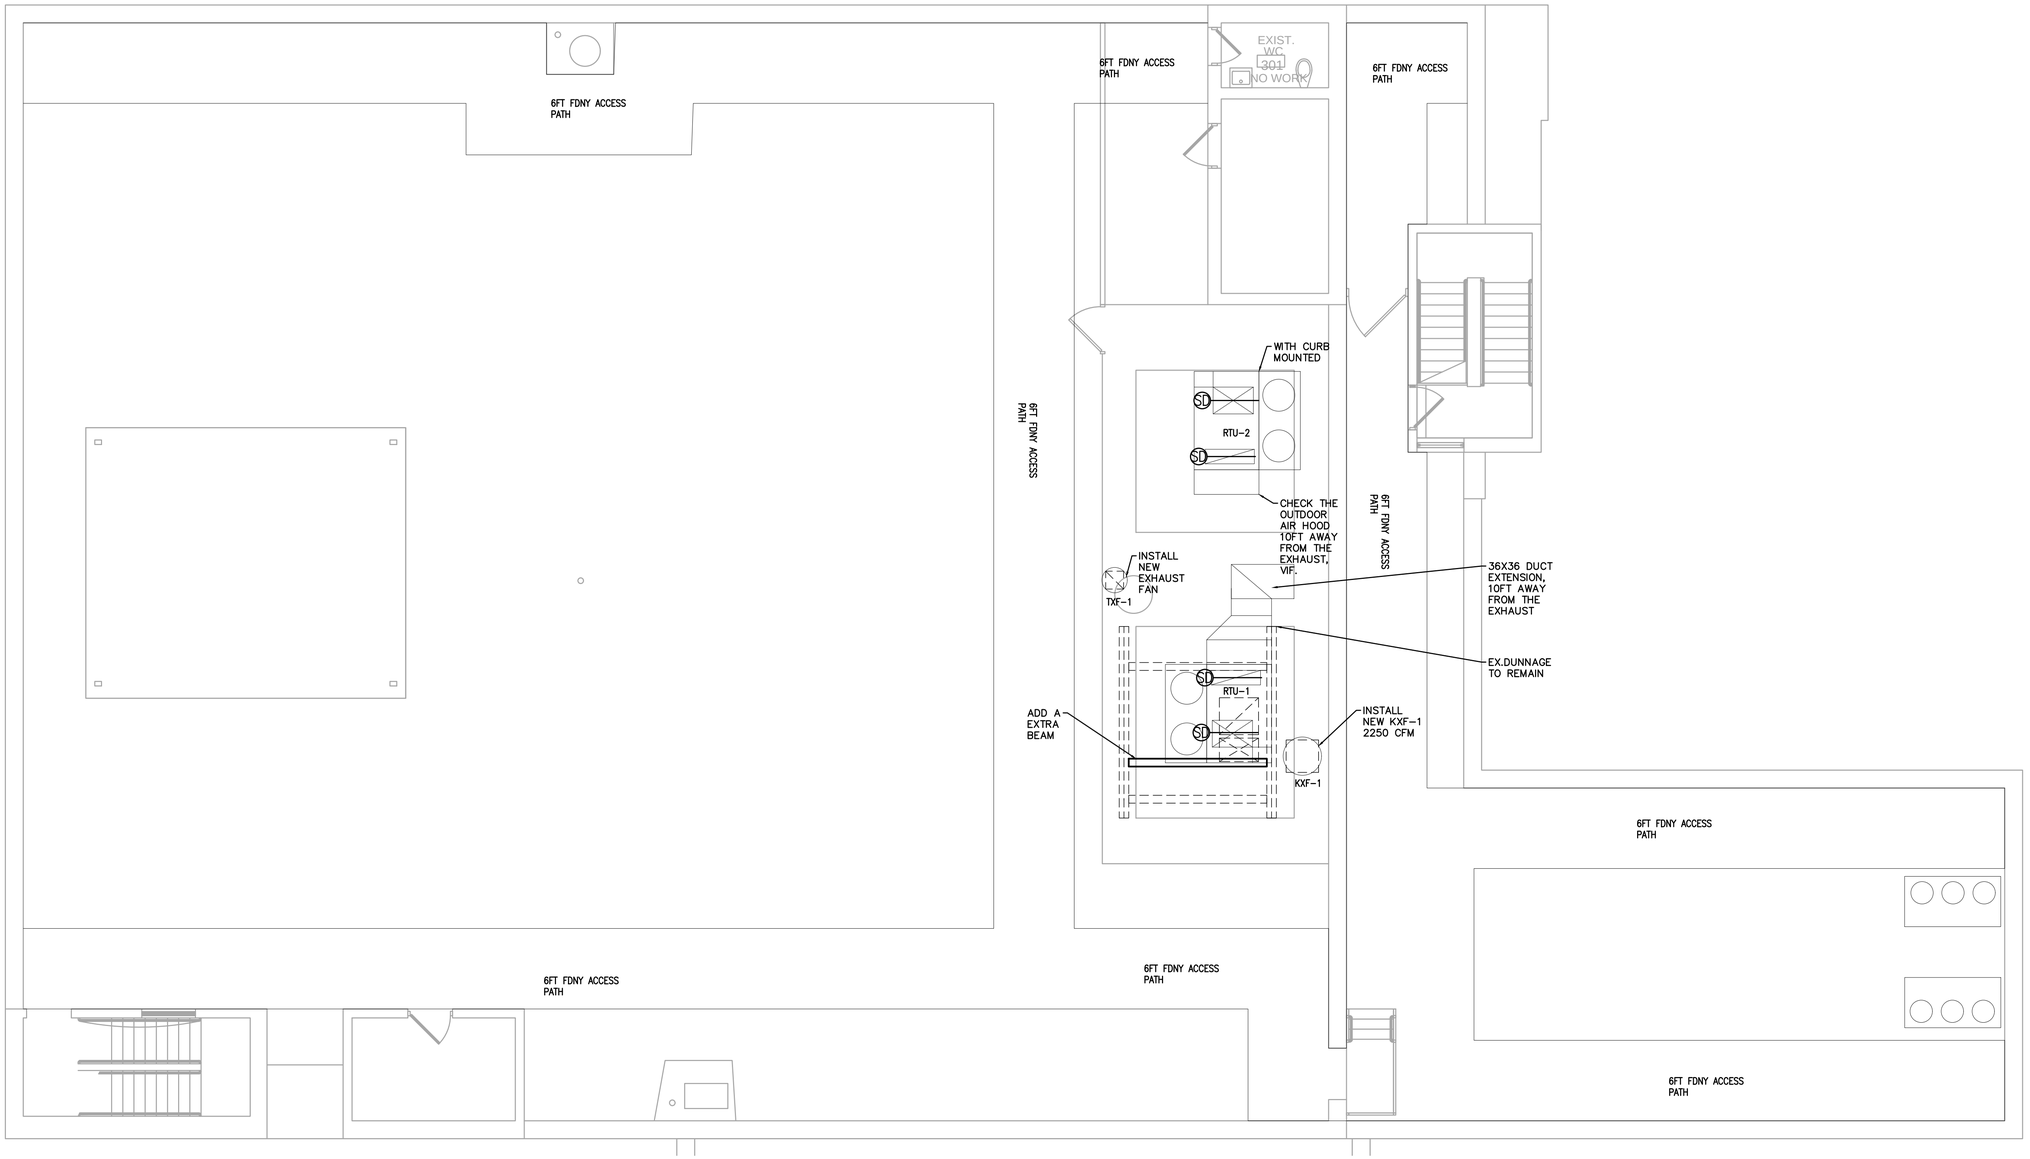

MECHANICAL PROPOSED ROOF PLAN

SCALE: 3/16" = 1'-0"

ALL CITY ENGINEERING, P.C.

OWNER:

SITE PLAN



DoB STAMPS:

No.	DATE	REVISION

NOTE: Drawing may be printed at reduced scale

IT IS A VIOLATION OF THE STATE EDUCATION LAW SECTION 7209 (2) FOR ANY PERSON TO ALTER AN ITEM IN ANY WAY UNLESS SUCH PERSON IS ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER, AND THE ENGINEER STAMPS SUCH CHANGES

PROJECT:

36-49 11TH STREET
LONG ISLAND CITY , NY 11106
BLOCK: 352 LOT: 1

DRAWING TITLE:

MECHANICAL PROPOSED ROOF PLAN

DATE:	04/08/2025
PROJECT No.:	25031
DRAWN BY:	EL
CHECKED BY:	KX

SEAL AND SIGNATURE

DWG. No.: M-102.00

Sheets: 05 of 11

D.O.B NOW JOB No. :
X

FAN SCHEDULE

UL LISTED 705

			FAN DATA				MOTOR DATA					
UNIT TAG	SERVICE	LOCATION	CAPACITY C.F.M	EXTERNAL STATIC PRESSURE IN.	TYPE OF DRIVE	FEI	RATED H.P.	VOLTAGE	PHASE	HZ	MFG/MODEL#	REMARKS
KXF-1	KITCHEN EXHUAST FAN	ROOF	2250	1.5"	DIRECT	1.27	1	208	3	60	GREENHECK CUBE-180HP-VGD	INTERLOCK WITH MAF-1
MAF-1	MAKEUP AIR FAN	1ST FLOOR	2000	1.0"	DIRECT	–	3/4	115	1	60	GREENHECK SQ-140-VG	INTERLOCK WITH KXF-1
TXF-1	TOILET EXHUAST FAN	ROOF	800	1.0"	DIRECT	–	1/4	115	1	60	GREENHECK G-099-VG	SCHOOL OPERATION TIME

NOTES:

PROVIDE LOW LEAKAGE DAMPER FOR ALL EXHAUST FAN, BACKDRAFT DAMPER FOR 300 CFM LESS, MOTORIZED DAMPER FOR 300 CFM AND MORE.
PROVIDE HIGH EFF. MOTORS

ELECTRIC DUCT HEATER SCHEDULE

UNIT TAG	QUANTITY	HEATING CAPACITY		AIR DATA		ELECTRICAL DATA				MANUFACTURER	MODEL NUMBER	SIZE
		BTU/HR	KW	CAPACITY (CFM)	TEMPERATURE CHANGE (°F)	VOLTS	PHASE	HZ	AMPS			
EDH-1	1	64847	19	2000	30.0	208	3	60		INDEECO	QUA – SLIP IN	26x24

VERTICAL RETURN/EXHAUST AIR GRILLES SCHEDULE (CEILING MOUNTED)

TAG	NOMINAL DUCT SIZE (IN)	GRILL SIZE (IN.)	CFM RANGE	MAXIMUM DUCT VELOCITY FPM	PRESSURE LOSS (IN. WG)	NC LEVEL	MODEL	MANUFACTURER
CR-A	6X6	7¾X7¾	0–100	<600	0.102	<20	355R	TITUS
CR-B	8X8	9¾X9¾	101–200	<600	0.102	<20	355R	TITUS
CR-C	10X10	11¾X11¾	201–325	<600	0.102	<20	355R	TITUS
CR-D	12X12	13¾X13¾	325–475	<600	0.102	<20	355R	TITUS
CR-E	14X14	15¾X15¾	476–650	<600	0.102	<20	355R	TITUS
CR-F	16X16	17¾X17¾	651–850	<600	0.102	<20	355R	TITUS

NOTES:
1. CONTRACTOR SHALL COORDINATE GRILL FRAME AND BORDER WITH ARCHITECT
2. COORDINATE WITH ARCHITECT FOR ELEVATION OF GRILL

ALL CITY ENGINEERING, P.C.

OWNER:

SITE PLAN



DoB STAMPS:

No.	DATE	REVISION

NOTE: Drawing may be printed at reduced scale

IT IS A VIOLATION OF THE STATE EDUCATION LAW SECTION 7209 (2) FOR ANY PERSON TO ALTER AN ITEM IN ANY WAY UNLESS SUCH PERSON IS ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER, AND THE ENGINEER STAMPS SUCH CHANGES

PROJECT:

36-49 11TH STREET
LONG ISLAND CITY , NY 11106
BLOCK: 352 LOT: 1

DRAWING TITLE:

MECHANICAL SCHEDULE–1

DATE:	04/08/2025
PROJECT No.:	25031
DRAWN BY:	EL
CHECKED BY:	KX

SEAL AND SIGNATURE

DWG. No.: M-401.00

Sheets: 07 of 11

D.O.B NOW JOB No. :
X