Status: Active Estimates
Contact:
Date: 09/23/2025

Estimate: 250137 11W 42nd St, 3rd Floor

Estimate Unit Costs

Line	Description	Quantity	Unit Cost	Total
1	**02 Existing Conditions**			
2	**02.1000 Demolition**			
3	Remove Interior Partitions	380.00 LF	23.00	8,740.00
4	Remove ACT Ceilings, Diffusers, Lighting Fixtures, etc.	8,690.00 SF	1.75	15,207.50
5	Remove Ductwork, Sprinkler Piping, Conduit, Wiring, etc.	8,690.00 SF	1.00	8,690.00
6	Remove 12x12 Carpet Tile & Base	8,690.00 SF	2.50	21,725.00
7	Strip Sheetrock Furring @ Interior Columns	17.00 EA	500.00	8,500.00
8	Remove Window Treatments	17.00 EA	175.00	2,975.00
9	Remove Millwork	1.00 LS	3,500.00	3,500.00
10			**Demolition Total**	**$69,337.50**
11			**Existing Conditions Total**	**$69,337.50**
12	**06 Wood , Plastic and Composites**			
13	**06.2200 Millwork**			
14	F/I Misc. Millwork Features	8,690.00 SF	2.00	17,380.00
15	F/I Lower Cabinets @ Kitchenette	16.68 LF	550.00	9,174.00
16	F/I Upper Cabinets @ Kitchenette	16.60 LF	550.00	9,130.00
17			**Millwork Total**	**$35,684.00**
18			**Wood , Plastic and Composites Total**	**$35,684.00**
19	**08 Openings**			
20	**08.1100 HM Doors, Frames & HW**			
21	F/O HM Frame (Single)	1.00 EA	400.00	400.00
22	F/O HM Frame (Pair)	1.00 EA	450.00	450.00
23	F/O HM Door	3.00 EA	425.00	1,275.00
24	F/O Door Hardware (Commercial Interior)	3.00 EA	1,000.00	3,000.00
25			**HM Doors, Frames & HW Total**	**$5,125.00**
26	**08.8200 Arch. Metal & Glass**			
27	F/I Interior Storefront (½" Clear Tempered with Top & Bottom Channel - Black Anodized) (Plan View)	552.72 SF	110.00	60,799.20
28			**Arch. Metal & Glass Total**	**$60,799.20**
29			**Openings Total**	**$65,924.20**
30	**09 Finishes**			
31	**09.2300 Drywall & Carpentry**			
32	F/I Rated Column Enclosures	20.00 EA	750.00	15,000.00
33	F/I 5/8" GWB Walls (Level 4 Finish)	5,427.84 SF	4.00	21,711.36
34	F/I Wood Blocking	69.09 LF	15.00	1,036.35
35	F/I Blanket Insulation	1,884.84 SF	2.00	3,769.68
36	F/I 3.5" Sound Attenuation Blanket	829.08 SF	1.35	1,119.26
37	I/O Interior HM Door, Frame & HW (Single)	1.00 EA	250.00	250.00
38	I/O Interior HM Doors, Frame & HW (Pair)	1.00 EA	250.00	250.00
39	F/I 3-5/8" Metal Stud Framing	3,028.06 SF	6.50	19,682.39
40	F/I Acoustical Sealant	628.28 LF	1.00	628.28

Line	Description	Quantity	Unit Cost	Total
41			**Drywall & Carpentry Total**	**$63,447.32**
42	**09.3013 Tile & Stone**			
43	F/I Floor Tile & Base ($10/SF Material Allowance)	677.56 SF	33.00	22,359.48
44	Template, Fabricate & Install Solid Surface Countertop @ Kitchenette	34.00 SF	140.00	4,760.00
45			**Tile & Stone Total**	**$27,119.48**
46	**09.6000 Flooring**			
47	Standard Floor Prep	8,012.44 SF	0.65	5,208.09
48	F/I Vinyl Plank Flooring & Base	8,012.44 SF	10.50	84,130.62
49			**Flooring Total**	**$89,338.71**
50	**09.9100 Painting**			
51	Wipe & Paint Exposed Spiral Ductwork	1.00 LS	50,000.00	50,000.00
52	Paint GWB Walls	5,427.84 SF	1.30	7,056.19
53	Paint Existing GWB Walls	4,307.40 SF	1.30	5,599.62
54	Paint HM Door & Frame (Single)	1.00 EA	175.00	175.00
55	Paint Existing HM Door & Frame (Single)	1.00 EA	200.00	200.00
56	Paint HM Door & Frame (Pair)	1.00 EA	175.00	175.00
57	Patch & Paint Underside of Concrete Deck	8,690.00 SF	2.75	23,897.50
58	Paint Existing HM Door & Frame (Pair)	1.00 EA	285.00	285.00
59			**Painting Total**	**$87,388.31**
60			**Finishes Total**	**$267,293.82**
61	**10 Specialties**			
62	**10.0000 Space Dividers**			
63	F/I Free-Standing Space Dividers	8.00 EA	12,000.00	96,000.00
64			**Space Dividers Total**	**$96,000.00**
65			**Specialties Total**	**$96,000.00**
66	**11 Equipment**			
67	**11.3100 Appliances**			
68	F/O Coffee Maker	1.00 EA	1,000.00	1,000.00
69	F/O Refrigerator	1.00 EA	3,400.00	3,400.00
70	F/O Dishwasher	1.00 EA	1,500.00	1,500.00
71	F/O Microwave	1.00 EA	450.00	450.00
72			**Appliances Total**	**$6,350.00**
73			**Equipment Total**	**$6,350.00**
74	**21 Fire Suppression**			
75	**21.0000 Sprinkler**			
76	Sprinkler Relocates & Removals	8,690.00 SF	3.95	34,325.50
77			**Sprinkler Total**	**$34,325.50**
78			**Fire Suppression Total**	**$34,325.50**
79	**22 Plumbing**			
80	**22.0000 Plumbing**			
81	Domestic Water Tie-In	1.00 LS	3,000.00	3,000.00

Line	Description	Quantity	Unit Cost	Total
82	F/I Point-of-Use HWH (2.5 Gallon)	1.00 EA	1,800.00	1,800.00
83	Core Drills	3.00 EA	550.00	1,650.00
84	F/I Sanitary Piping, Cleanouts & Connections	50.00 LF	85.00	4,250.00
85	F/I 2" Vent Piping	30.00 LF	70.00	2,100.00
86	F/I Domestic Water Piping	60.00 LF	55.00	3,300.00
87	I/O Sink & Faucet	1.00 EA	1,800.00	1,800.00
88	I/O Dishwasher	1.00 EA	1,200.00	1,200.00
89	F/I Refrigerator Waterline	1.00 EA	700.00	700.00
90	F/I Coffee Maker Waterline	1.00 EA	700.00	700.00
91			**Plumbing Total**	**$20,500.00**
92	**22.4000 Plumbing Fixtures**			
93	F/O Kitchen Sink	1.00 EA	2,400.00	2,400.00
94	F/O Kitchen Faucet	1.00 EA	1,000.00	1,000.00
95			**Plumbing Fixtures Total**	**$3,400.00**
96			**Plumbing Total**	**$23,900.00**
97	**23 Heating, Ventilating and Air-Conditioning**			
98	**23.0000 HVAC**			
99	Air Distribution	8,690.00 SF	10.00	86,900.00
100	VAVs & Small Fan Coils	8,690.00 SF	4.00	34,760.00
101	Supplemental Cooling for Server Room	1.00 LS	26,000.00	26,000.00
102	Refrigerant/Hydronic Piping, Valves & Drains	8,690.00 SF	2.00	17,380.00
103	HVAC Controls	8,690.00 SF	2.50	21,725.00
104	HVAC Testing & Balancing	8,690.00 SF	1.00	8,690.00
105			**HVAC Total**	**$195,455.00**
106			**Heating, Ventilating and Air-Conditioning Total**	**$195,455.00**
107	**26 Electrical**			
108	**26.0000 Electric**			
109	Electric	8,690.00 SF	20.00	173,800.00
110			**Electric Total**	**$173,800.00**
111	**26.5000 Lighting Fixtures**			
112	Lighting Fixtures	8,690.00 SF	6.50	56,485.00
113			**Lighting Fixtures Total**	**$56,485.00**
114			**Electrical Total**	**$230,285.00**
115	**28 Safety And Security**			
116	**28.4600 Fire Alarm**			
117	Fire Alarm	8,690.00 SF	1.75	15,207.50
118			**Fire Alarm Total**	**$15,207.50**
119			**Safety And Security Total**	**$15,207.50**
120	**Sub-Total (Base Cost)**			**$1,039,762.52**

Estimate Summary

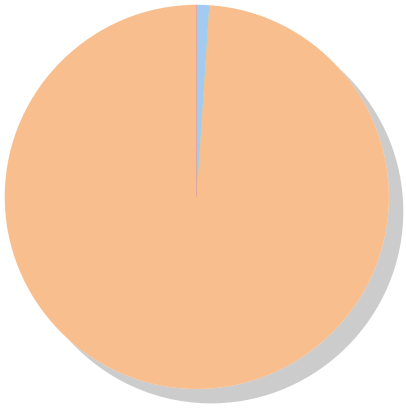

Description		Total
Sub-Total (Base Cost)		$1,039,762.52
Sub-Total (Direct Cost)		$1,039,762.52
General Conditions	10.0000%	103,976.25
Fee	6.0000%	68,624.33
Insurance	2.5000%	30,309.08
Total Estimate		$1,242,672.18