Estimate: 250060 1910 N Charles

Estimate Unit Costs

Line	Description	Quantity	Unit Cost	Total
1	**01 General Requirements**			
2	**01.0040 Design & Permit Fees (NIC)**			
3	Design & Permit Fees (NIC)	1.00 LS	0.00	0.00
4			**Design & Permit Fees (NIC) Total**	**$0.00**
5	**01.0050 General Conditions**			
6	Supervision	26.00 WK	3,000.00	78,000.00
7	General Labor	16.00 WK	1,400.00	22,400.00
8	Project Manager	6.00 WK	3,500.00	21,000.00
9			**General Conditions Total**	**$121,400.00**
10			**General Requirements Total**	**$121,400.00**
11	**02 Existing Conditions**			
12	**02.1000 Demolition**			
13	Remove Platform	721.56 SF	2.00	1,443.12
14	Remove Walk-In Cooler	1.00 EA	600.00	600.00
15	Plywood Removal And Second Floor Framing Analysis	1.00 LS	3,000.00	3,000.00
16	Demo Abandoned Rooftop Signage	1.00 LS	3,000.00	3,000.00
17	Remove Interior Partitions	438.86 LF	18.00	7,899.48
18	Remove Millwork	24.27 LF	25.00	606.75
19	Remove Ceiling	9,079.55 SF	2.50	22,698.88
20	Remove Flooring	9,079.55 SF	2.50	22,698.88
21	Remove Plumbing Fixtures & Existing Rough-Ins	16.00 EA	125.00	2,000.00
22	Remove Doors & Frames	26.00 EA	75.00	1,950.00
23	Remove Stairs	8.00 EA	75.00	600.00
24	Remove Millwork & Kitchen Equipment	117.69 LF	30.00	3,530.70
25	Remove Bath Partitions	12.00 EA	35.00	420.00
26	Remove Countertops	17.87 LF	6.00	107.22
27	Remove Urinal Screens	1.00 EA	30.00	30.00
28			**Demolition Total**	**$70,585.03**
29			**Existing Conditions Total**	**$70,585.03**
30	**04 Masonry**			
31	**04.1000 Masonry**			
32	New CMU Basement Walls	1.00 LS	20,000.00	20,000.00
33			**Masonry Total**	**$20,000.00**
34	**04.5700 Masonry Fireplaces**			
35	Chimney Repairs	1.00 LS	3,000.00	3,000.00
36			**Masonry Fireplaces Total**	**$3,000.00**
37	**04.5710 Brick**			
38	Brick Pointing And Repair In Basement	1.00 LS	7,000.00	7,000.00
39	Facade Brick & Mortar Repairs	1.00 LS	10,000.00	10,000.00
40			**Brick Total**	**$17,000.00**
41			**Masonry Total**	**$40,000.00**

Line	Description	Quantity	Unit Cost	Total
42	**05 Metal**			
43	**05.0050 Structural Steel**			
44	Mechanical Equipment Support Repairs	1.00 LS	10,000.00	10,000.00
45			**Structural Steel Total**	**$10,000.00**
46	**05.5000 Metal Fabrications**			
47	Fire Escape Stair Replacement And Catwalk Repairs	1.00 LS	20,000.00	20,000.00
48			**Metal Fabrications Total**	**$20,000.00**
49			**Metal Total**	**$30,000.00**
50	**06 Wood , Plastic and Composites**			
51	**06.2000 Finish Carpentry**			
52	Add Stair Riser	1.00 EA	600.00	600.00
53	Extend Handrail	1.00 EA	400.00	400.00
54	F/I Base Molding	962.98 LF	8.00	7,703.84
55			**Finish Carpentry Total**	**$8,703.84**
56	**06.2200 Millwork**			
57	F/I Bar Top @ Suite 2	36.61 SF	75.00	2,745.75
58	F/I Bar Top @ Suite 1	81.98 SF	75.00	6,148.50
59	Bar Top @ Lounge	54.00 SF	60.00	3,240.00
60	Reconstruct Existing Bar In New Location @ Suite 4 2nd Floor	40.37 LF	60.00	2,422.20
61	F/I Kitchen/Bar @ Suite 1	51.36 LF	375.00	19,260.00
62	F/I Bar Suite 2	34.74 LF	375.00	13,027.50
63	F/I POS	7.02 LF	687.50	4,826.25
64	F/I Bar @ Lounge	24.68 LF	300.00	7,404.00
65			**Millwork Total**	**$59,074.20**
66	**06.2300 Closet Interiors**			
67	F/I Storage Closet Shelving	28.74 LF	175.00	5,029.50
68			**Closet Interiors Total**	**$5,029.50**
69	**06.4000 Wood Framing Repairs**			
70	Repair Roof Joists And Decking	1.00 LS	8,000.00	8,000.00
71	First Floor Floor Joist And Beam Reapirs	1.00 LS	6,000.00	6,000.00
72	First Floor Post And Foundation Repair	1.00 LS	6,000.00	6,000.00
73			**Wood Framing Repairs Total**	**$20,000.00**
74	**06.4001 Wood Framing Materials**			
75	F/O 2x4 PT	3,845.67 LF	1.90	7,291.39
76	F/O 2x4 DF	891.12 LF	1.63	1,454.33
77	F/O 2x4 Studs	2,916.58 LF	1.61	4,689.84
78	F/O 2x6 PT	2.34 LF	2.29	5.37
79	F/O 2x6 DF	4.68 LF	1.85	8.65
80	F/O 2x6 Studs	26.72 LF	1.85	49.37
81	F/O 2x10 DF	425.68 LF	4.11	1,747.01
82	F/O 4x8x1/2" CDX Fir Plywood	18.72 SF	2.82	52.78

Line	Description	Quantity	Unit Cost	Total
83	F/O 4x8x3/4" TG Advantech Plywood	5,095.55 SF	1.93	9,715.53
84	F/O Termite shield (6" x 25' Aluminum Roll)	2.34 LF	7.33	17.15
85	F/O FormSealR 5-1/2" x 50' Sill Seal	2.34 LF	5.13	12.00
86			**Wood Framing Materials Total**	**$25,043.42**
87	**06.4002 Wood Framing Labor**			
88	I/O Interior Framed Wall	3,774.94 SF	3.00	11,324.82
89	I/O Floor Framing (Joists & Subfloor)	4,683.41 SF	4.50	21,075.36
90	I/O Exterior Wall Framing & Sheathing @ 1st Floor	18.72 SF	4.50	84.24
91			**Wood Framing Labor Total**	**$32,484.42**
92	**06.4300 Wood Stairs And Railings**			
93	F/I White Oak Stairs w/Poplar Strings & Risers (Per Riser)	8.00 EA	475.00	3,800.00
94			**Wood Stairs And Railings Total**	**$3,800.00**
95			**Wood , Plastic and Composites Total**	**$154,135.38**
96	**07 Thermal and Moisture Protection**			
97	**07.1000 Waterproofing**			
98	F/I Waterproofing @ Basement Walls	1.00 LS	15,000.00	15,000.00
99			**Waterproofing Total**	**$15,000.00**
100	**07.2000 Insulation**			
101	F/I Sound Deadening Insulation	3,617.07 SF	1.50	5,425.61
102	F/I R-21 Fiberglass Batt	18.72 SF	3.00	56.16
103			**Insulation Total**	**$5,481.77**
104	**07.9510 Siding**			
105	F/I 4'x8'x1/2" Azek Panel @ Exterior Wall Infill	20.00 SF	16.82	336.40
106	F/I Tyvek Housewrap	18.72 SF	11.56	216.36
107	F/I Tyvek Tape	18.72 SF	1.35	25.30
108			**Siding Total**	**$578.06**
109			**Thermal and Moisture Protection Total**	**$21,059.83**
110	**08 Openings**			
111	**08.1100 HM Doors, Frames & HW**			
112	F/O HM Frame (Single)	10.00 EA	365.00	3,650.00
113	F/O HM Frame (Pair)	2.00 EA	400.00	800.00
114	F/O HM Door	14.00 EA	400.00	5,600.00
115	Tell 8300B Rim Panic Device 36" US32D	1.00 EA	156.50	156.50
116	F/O Door Hardware (Commercial Interior)	10.00 EA	500.00	5,000.00
117	F/O Door Hardware (Commercial Exterior)	4.00 EA	1,075.00	4,300.00
118			**HM Doors, Frames & HW Total**	**$19,506.50**
119	**08.8200 Arch. Metal & Glass**			
120	F/I Ornate Entry Doors	1.00 EA	10,000.00	10,000.00
121	Remove & Replace Storefront Doors & HW (Pair)	1.00 LS	5,200.00	5,200.00
122	F/I Interior Storefront (½" Clear Tempered with Top & Bottom Channel - Black Anodized) (Plan View)	56.88 SF	105.00	5,972.40

Line	Description	Quantity	Unit Cost	Total
123	F/I Vestibule Storefront Door & HW	3.00 EA	2,950.00	8,850.00
124	Remove & Replace Exterior Storefront Door & HW (Single)	2.00 EA	3,600.00	7,200.00
125	Remove & Replace Exterior Glass Storefront System Black	319.12 SF	120.00	38,294.40
126			**Arch. Metal & Glass Total**	**$75,516.80**
127			**Openings Total**	**$95,023.30**
128	**09 Finishes**			
129	**09.2300 Drywall & Carpentry**			
130	Refurbush Interior Of Walk-In Cooler FRP	83.63 SF	25.00	2,090.75
131	F/I 1/2" GWB Walls	7,412.85 SF	2.40	17,790.84
132	F/I 5/8" GWB Ceilings 2 Layers For Fire Cap	4,506.56 SF	2.75	12,393.04
133	F/I 5/8" GWB Ceilings	9,120.40 SF	2.75	25,081.10
134	Patch Existing GWB Walls	7,903.94 SF	1.50	11,855.91
135	I/O Bath Accessories	4.00 BATH	500.00	2,000.00
136	I/O Interior HM Door, Frame & HW (Single)	10.00 EA	275.00	2,750.00
137	I/O Interior HM Doors, Frame & HW (Pair)	2.00 EA	550.00	1,100.00
138			**Drywall & Carpentry Total**	**$75,061.64**
139	**09.2500 Acoustical Ceilings**			
140	ACT Ceilings (Budget)	8,567.42 SF	13.00	111,376.46
141			**Acoustical Ceilings Total**	**$111,376.46**
142	**09.3013 Tile & Stone**			
143	F/I Floor Tile @ 1st Floor Bathrooms ($7/SF Material Allowance)	414.51 SF	22.70	9,409.37
144	F/I Floor Tile @ Lobby ($7/SF Material Allowance)	398.73 SF	22.70	9,051.15
145	F/I Floor Tile @ Entry Vestibule ($7/SF Material Allowance)	22.06 SF	22.70	500.79
146	F/I Floor Tile @ 2nd Floor Bathrooms ($7/SF Material Allowance)	336.43 SF	22.70	7,636.94
147	F/I Wall Tile @ 1st Floor Bathrooms ($7/SF Material Allowance)	1,147.12 SF	22.70	26,039.61
148	F/I Wall Tile @ 2nd Floor Bathrooms ($7/SF Material Allowance)	784.40 SF	22.70	17,805.88
149	F/I Waterproofing for Wall Tile	241.44 SF	4.00	965.76
150	F/I Waterproofing for Floor Tile	1,193.97 SF	4.00	4,775.88
151			**Tile & Stone Total**	**$76,185.38**
152	**09.6000 Flooring**			
153	F/I Rubber Stair Treads	36.00 EA	105.00	3,780.00
154	F/I Walkoff Mat	6.85 SY	75.00	513.75
155			**Flooring Total**	**$4,293.75**
156	**09.6400 Wood Flooring**			
157	Sprung Floor System By Owner (NIC)	3,318.19 SF	0.00	0.00
158	F/I Engineered Wood Flooring ($10/SF Material Allowance)	4,427.23 SF	17.50	77,476.50
159			**Wood Flooring Total**	**$77,476.50**
160	**09.6700 Fluid-Applied Flooring**			
161	Epoxy Resin Flooring	897.07 SF	12.00	10,764.84
162			**Fluid-Applied Flooring Total**	**$10,764.84**
163	**09.9100 Painting**			

Line	Description	Quantity	Unit Cost	Total
164	Paint GWB Walls	7,351.28 SF	1.20	8,821.53
165	Paint Base Molding	962.98 LF	3.25	3,129.70
166	Paint GWB Walls	7,903.94 SF	1.20	9,484.73
167	Paint HM Door & Frame (Single)	10.00 EA	200.00	2,000.00
168	Paint Existing HM Door & Frame (Single)	3.00 EA	200.00	600.00
169	Paint HM Door & Frame (Pair)	2.00 EA	285.00	570.00
170			**Painting Total**	**$24,605.96**
171			**Finishes Total**	**$379,764.53**
172	**10 Specialties**			
173	**10.2600 Wall And Door Protection**			
174	F/I FRP Panels @ Janitors Closet Walls	79.52 SF	10.00	795.20
175			**Wall And Door Protection Total**	**$795.20**
176	**10.2800 Bath Accessories**			
177	F/O Bath Accessories (Budget Per Bathroom - Commercial)	4.00 EA	1,000.00	4,000.00
178			**Bath Accessories Total**	**$4,000.00**
179	**10.2900 Toilet Partitions**			
180	F/I Toilet Partitions (86" High HPL Finish + SS Hardware)	12.00 EA	2,400.00	28,800.00
181	F/I Urinal Screens	2.00 EA	800.00	1,600.00
182			**Toilet Partitions Total**	**$30,400.00**
183			**Specialties Total**	**$35,195.20**
184	**12 Furnishing**			
185	**12.3600 Countertops**			
186	Template, Fabricate & Install Countertops With Aprons ($60/SF Material Allowance)	54.56 SF	125.00	6,820.00
187			**Countertops Total**	**$6,820.00**
188	**12.9313 Bike Racks**			
189	F/I Long Term Bike Storage Rack	5.00 EA	529.00	2,645.00
190			**Bike Racks Total**	**$2,645.00**
191			**Furnishing Total**	**$9,465.00**
192	**21 Fire Suppression**			
193	**21.0000 Sprinkler**			
194	Sprinkler Budget	1.00 LS	30,000.00	30,000.00
195			**Sprinkler Total**	**$30,000.00**
196			**Fire Suppression Total**	**$30,000.00**
197	**22 Plumbing**			
198	**22.0000 Plumbing**			
199	F/I Plumbing Fixtures at 1st Floor	1.00 LS	65,000.00	65,000.00
200	F/I Plumbing Fixtures at 2nd Floor	1.00 LS	28,000.00	28,000.00
201	Rework Gas and Water	1.00 LS	0.00	0.00
202	F/I Floor Sinks	1.00 LS	0.00	0.00
203	Make Connections to Kitchen Equipment	1.00 LS	0.00	0.00

Line	Description	Quantity	Unit Cost	Total
204			**Plumbing Total**	**$93,000.00**
205			**Plumbing Total**	**$93,000.00**
206	**23 Heating, Ventilating and Air-Conditioning**			
207	**23.0000 HVAC**			
208	Reclaim Refrigerant From Walk-In Cooler & Properly Dispose	1.00 EA	800.00	800.00
209	HVAC Budget	1.00 LS	180,000.00	180,000.00
210			**HVAC Total**	**$180,800.00**
211			**Heating, Ventilating and Air-Conditioning Total**	**$180,800.00**
212	**26 Electrical**			
213	**26.0000 Electric**			
214	Electrical Budget	1.00 LS	70,000.00	70,000.00
215	Electrical Disconnects Prior to Demo	1.00 EA	0.00	0.00
216			**Electric Total**	**$70,000.00**
217	**26.5000 Lighting Fixtures**			
218	Lighting Fixture Budget	9,722.00 SF	5.00	48,610.00
219			**Lighting Fixtures Total**	**$48,610.00**
220			**Electrical Total**	**$118,610.00**
221	**32 Exterior Improvements**			
222	**32.1500 Fencing**			
223	F/I 10' Chain-Link Fencing Enclosure @ Long Term Bicycle Storage	40.38 LF	70.00	2,826.60
224	F/I 5' Wide Chain Link Ceiling @ Long Term Bike Storage Enclosure	30.52 LF	65.00	1,983.80
225	F/I 10' Chain-Link Single Gate	1.00 EA	500.00	500.00
226			**Fencing Total**	**$5,310.40**
227			**Exterior Improvements Total**	**$5,310.40**
228	**Sub-Total (Base Cost)**			**$1,384,348.67**

Estimate Summary

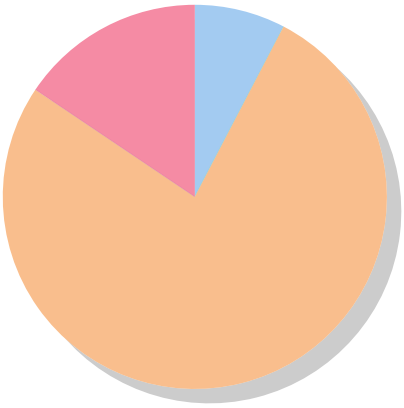

Material [$105,922]
Labor [$0]
SubContractor [$1,062,753]
Equipment [$0]
Other [$215,674]

Description		Total
Sub-Total (Base Cost)		$1,384,348.67
Material	10.0000%	10,592.23
Labor	30.0000%	0.00
SubContractor	5.0000%	53,137.64
Equipment	10.0000%	0.00
Sub-Total (Direct Cost)		$1,448,078.54
Contingency (10%)	10.0000%	144,807.85
General Requirements	2.0000%	31,857.73
Overhead & Profit	10.0000%	162,474.41
Total Estimate		$1,787,218.53