Status: Active Estimates
Contact:
Date: 12/09/2025

Estimate: 250170 72 Gansevoort St, 2nd Floor

Estimate Unit Costs

Line	Description	Quantity	Unit Cost	Total
1	**01 General Requirements**			
2	**01.0050 General Requirements**			
3	Supervision (Per Week)	5.00 WK	3,800.00	19,000.00
4	General Labor (Per Week)	5.00 WK	2,320.00	11,600.00
5	Minis and Protection Materials	1.00 EA	3,500.00	3,500.00
6			**General Requirements Total**	**$34,100.00**
7			**General Requirements Total**	**$34,100.00**
8	**02 Existing Conditions**			
9	**02.0500 Existing Conditions**			
10	Misc. Patching & Skim Coating	1.00 LS	2,000.00	2,000.00
11			**Existing Conditions Total**	**$2,000.00**
12	**02.1000 Demolition**			
13	Remove Interior Partitions	37.96 LF	32.00	1,214.72
14	Remove Millwork	8.46 LF	33.00	279.18
15	Remove Floor Tile	64.03 SF	3.50	224.11
16	Remove Wall Tile & Backing	248.96 SF	6.00	1,493.76
17	Remove Flooring	1,775.74 SF	2.65	4,705.71
18	Remove Plumbing Fixtures	2.00 EA	75.00	150.00
19	Remove Doors & Frames	2.00 EA	85.00	170.00
20	Remove Interior Storefronts	22.60 LF	60.00	1,356.00
21			**Demolition Total**	**$9,593.48**
22			**Existing Conditions Total**	**$11,593.48**
23	**03 Concrete**			
24	**03.3370 Concrete Topping**			
25	F/I TS-1 Topping Slab [Ardex w/Polished Finish]	1,398.43 SF	19.22	26,879.00
26			**Concrete Topping Total**	**$26,879.00**
27			**Concrete Total**	**$26,879.00**
28	**04 Masonry**			
29	**04.1000 Masonry**			
30	Set Door Buck in Masonry Opening	1.00 EA	250.00	250.00
31	Sawcut Opening for New Door	1.00 EA	2,000.00	2,000.00
32	F/I Lintel Above Door	1.00 EA	950.00	950.00
33	F/I CMU Block [8"x8"x16"] @ Existing Bathroom	22.05 BLOCK	60.00	1,323.00
34			**Masonry Total**	**$4,523.00**
35			**Masonry Total**	**$4,523.00**
36	**06 Wood , Plastic and Composites**			
37	**06.2200 Millwork**			
38	F/I Hat Shelf & Rod @ Closet	7.12 LF	142.79	1,016.67
39	F/I WD-2 Reclaimed Wood Cladding	210.00 SF	108.79	22,846.52
40	F/I Window Casing	71.34 LF	27.20	1,940.32
41	F/I Plywood Substrate & Lav Shield @ Bath Vanity Countertop	1.00 EA	1,223.92	1,223.92

Line	Description	Quantity	Unit Cost	Total
42	F/I WD-1 Lower Cabinets [Wilsonart Premium Laminate Daintree 8235K-05 Timbergrain Finish]	6.67 LF	815.95	5,442.37
43	F/I WD-1 Upper Cabinets [Wilsonart Premium Laminate Daintree 8235K-05 Timbergrain Finish]	13.44 LF	883.94	11,880.19
44			**Millwork Total**	**$44,350.00**
45			**Wood , Plastic and Composites Total**	**$44,350.00**
46	**08 Openings**			
47	**08.1100 Doors, Frames & HW**			
48	F/O Hardware Set #1	1.00 EA	600.00	600.00
49	F/O Hardware Set #2	1.00 EA	600.00	600.00
50	F/O Hardware Set #3	1.00 EA	600.00	600.00
51	F/O HM Frame (Single)	3.00 EA	365.00	1,095.00
52	F/O Solid-Core Wood Door	2.00 EA	550.00	1,100.00
53			**Doors, Frames & HW Total**	**$3,995.00**
54	**08.8200 Arch. Metal & Glass**			
55	F/I Interior Storefront	150.00 SF	123.27	18,489.85
56	F/I Distraction Markers	18.48 LF	82.18	1,518.63
57			**Arch. Metal & Glass Total**	**$20,008.49**
58	**08.8300 Mirrors**			
59	F/I Frameless Glass Mirrors	16.94 SF	88.05	1,491.51
60			**Mirrors Total**	**$1,491.51**
61			**Openings Total**	**$25,495.00**
62	**09 Finishes**			
63	**09.2300 Drywall & Carpentry**			
64	Misc. Patch & Repairs	1.00 LS	2,581.95	2,581.95
65	F/I 5/8" GWB Walls (Level 4 Finish)	1,378.08 SF	5.16	7,116.27
66	F/I 5/8" Durock (Plan View)	245.92 SF	2.50	614.80
67	F/I Hung GWB Ceilings (Level 4 Finish)	400.82 SF	18.59	7,451.26
68	F/I Wood Blocking Above Storefront	18.75 LF	15.49	290.47
69	F/I Wood Blocking for Cabinets	20.01 LF	15.49	309.99
70	F/I Wood Blocking for Bath Accessories	2.00 EA	180.74	361.47
71	F/I Blanket Insulation	911.70 SF	2.07	1,883.17
72	I/O Bath Accessories	2.00 BATH	619.67	1,239.34
73	I/O Interior HM Door, Frame & HW (Single)	4.00 EA	250.00	1,008.20
74	I/O Interior HM Doors, Frame & HW (Pair)	1.00 EA	361.47	361.47
75	F/I 3-5/8" Metal Stud Framing	911.70 SF	6.71	6,120.31
76	F/I Acoustical Sealant	242.78 LF	1.55	376.11
77			**Drywall & Carpentry Total**	**$29,714.80**
78	**09.2500 Acoustical Ceilings**			
79	F/I 8" Axiom Edge Trim	7.51 LF	52.86	396.96
80	F/I ACT Ceiling Tile	47.23 SF	13.27	626.52
81	F/I ACT Grid	47.23 SF	13.27	626.52

Line	Description	Quantity	Unit Cost	Total
82			**Acoustical Ceilings Total**	**$1,650.00**
83	**09.3013 Tile & Stone**			
84	F/I PT-1 Porcelain Tile Base	127.39 LF	22.00	2,802.58
85	F/I PT-1 Floor Tile [Stone Source Pavimenti Arena Plain Cinder 12"x24"]]	105.35 SF	45.00	4,740.75
86	F/I CT-1 Wall Tile Backsplash [Roca Tile 3"x12" Flow Tender Gray FLOTG10-312]	158.59 SF	45.00	7,136.55
87	F/I CT-1 Tile Backsplash [Roca Tile 3"X12" Flow Tender Gray FLOTG10-312]	19.92 SF	40.00	796.80
88	F/I Saddle/Threshold(s)	2.00 EA	250.00	500.00
89	F/I Waterproofing for Wall Tile	105.72 SF	5.25	555.03
90	F/I Waterproofing for Floor Tile	105.35 SF	5.25	553.09
91	F/I ST-1 Countertop @ Pantry	22.72 SF	140.00	3,180.80
92	F/I ST-1 Countertop @ Vanity [Caesarstone 4600 Organic White]	8.40 SF	200.00	1,680.00
93	F/I ST-1 Backsplash @ Vanity [Caesarstone 4600 Organic White]	2.21 SF	200.00	442.00
94			**Tile & Stone Total**	**$22,387.60**
95	**09.6000 Flooring**			
96	F/I 4" Vinyl Base	344.83 LF	4.00	1,379.32
97	F/I CPT-1 24"x24" Carpet Tile [Mannington Glitch Art Circuit Video Decoder 144430]	23.62 SY	130.00	3,070.60
98			**Flooring Total**	**$4,449.92**
99	**09.9100 Painting**			
100	Paint GWB Walls	1,288.90 SF	1.56	2,012.18
101	Paint Existing GWB/Brick Walls	2,976.00 SF	1.56	4,646.00
102	Paint GWB Ceilings	400.82 SF	1.56	625.74
103	Paint/Stain Wood Door + HM Frame (Single)	2.00 EA	234.17	468.35
104	Paint Window Casing	71.34 LF	5.20	371.24
105	Paint HM Door & Frame (Single)	2.00 EA	182.13	364.27
106	Paint HM Door & Frame (Pair)	1.00 EA	182.13	182.13
107	Paint Exposed Concrete Ceilings & Exposed Ductwork	1,345.03 SF	3.90	5,249.50
108	Paint Elevator Doors	1.00 EA	780.58	780.58
109			**Painting Total**	**$14,700.00**
110			**Finishes Total**	**$72,902.32**
111	**10 Specialties**			
112	**10.1400 Interior Signage**			
113	Signage	2.00 EA	100.00	200.00
114			**Interior Signage Total**	**$200.00**
115	**10.2800 Bath Accessories**			
116	F/O MR-1 Mirror	1.00 EA	1,500.00	1,500.00
117	F/O Grab Bar 36"	4.00 EA	55.00	220.00
118			**Bath Accessories Total**	**$1,720.00**
119			**Specialties Total**	**$1,920.00**
120	**11 Equipment**			

Line	Description	Quantity	Unit Cost	Total
121	**11.3100 Appliances**			
122	F/O Refrigerator [GE Energy Star GBE17HYRFS]	1.00 EA	1,688.78	1,688.78
123	F/O ADA Compliant Dishwasher [GE Energy Star GDT225SSLSS]	1.00 EA	1,082.55	1,082.55
124	F/O Countertop Microwave [GE Profile PEM31SFSS]	1.00 EA	454.67	454.67
125			**Appliances Total**	**$3,226.00**
126			**Equipment Total**	**$3,226.00**
127	**22 Plumbing**			
128	**22.0000 Plumbing**			
129	F/I Waste & Vent Piping Per Riser Diagram	1.00 LS	9,500.00	9,500.00
130	Relocate WC	1.00 EA	1,050.00	1,050.00
131	Relocate Lav & Faucet	1.00 EA	750.00	750.00
132	Connections & Tie-Ins	1.00 LS	6,500.00	6,500.00
133	Disconnect Existing Plumbing Fixtures	2.00 EA	500.00	1,000.00
134	I/O Bath Lav (Sink) & Faucet	1.00 EA	1,200.00	1,200.00
135	I/O Pantry Sink & Faucet	1.00 EA	1,200.00	1,200.00
136	I/O Dishwasher	1.00 EA	800.00	800.00
137	F/I Refrigerator Waterline	1.00 EA	700.00	700.00
138	F/I Electric HWH	1.00 EA	550.00	550.00
139			**Plumbing Total**	**$23,250.00**
140	**22.4000 Plumbing Fixtures**			
141	F/O Pantry Sink [Simple By WS Bath 60.50A.01 Rectangular ADA Compliant Vessel]	1.00 EA	2,400.00	2,400.00
142	F/O Kitchen Faucet [Toto HElix Eco Power Faucet ADA Compliant Polished Chrome]	1.00 EA	1,000.00	1,000.00
143	F/O LAV Sink [Kohler Ladena K-2214]	1.00 EA	1,200.00	1,200.00
144	F/O Lav Faucet	1.00 EA	500.00	500.00
145			**Plumbing Fixtures Total**	**$5,100.00**
146			**Plumbing Total**	**$28,350.00**
147	**23 Heating, Ventilating and Air-Conditioning**			
148	**23.0000 HVAC (Allowance)**			
149	F/I Toilet Exhaust Fan	1.00 EA	2,500.00	2,500.00
150	Startup, Testing & Balancing	1.00 LS	5,000.00	5,000.00
151	F/I 16"X16" Ductwork Insulated (Per LB)	204.31 LB	22.00	4,494.82
152	F/I 10"x10" Ductwork Insulated (Per LB)	110.00 LB	22.00	2,420.00
153	F/I 24"x24" Ductwork Insulated (Per LB)	157.30 LB	22.00	3,460.60
154	F/I 30"x30" Ductwork Insulated (Per LB)	154.41 LB	22.00	3,397.02
155	F/I 18"x18" Ductwork Insulated (Per LB)	100.73 LB	22.00	2,216.06
156	F/I 6" O Ductwork Insulated (Per LB)	12.73 LB	22.00	280.06
157	F/I Linear Diffuser (3 Slot)	6.03 LF	215.00	1,296.45
158			**HVAC (Allowance) Total**	**$25,065.01**
159			**Heating, Ventilating and Air-Conditioning Total**	**$25,065.01**
160	**26 Electrical**			

Line	Description	Quantity	Unit Cost	Total
161	**26.0000 Electric**			
162	F/I Breakers	6.00 EA	50.00	300.00
163	Wire Toilet Exhaust Fan	1.00 EA	550.00	550.00
164	Wire Hot Water Heater	1.00 EA	650.00	650.00
165	Duplex Receptacle (Commercial)	4.00 EA	225.00	900.00
166	GFI Receptacle (Commercial)	16.00 EA	350.00	5,600.00
167	F/I Floor-Mounted Duplex + Tel/Data + Core Drill	1.00 EA	1,800.00	1,800.00
168	I/O Lighting Fixture (Commercial)	33.00 EA	225.00	7,425.00
169	I/O Linear Lighting Fixture	19.62 LF	50.00	981.00
170			**Electric Total**	**$18,206.00**
171	**26.5000 Lighting Fixtures**			
172	F/O P-1 Lighting Fixtures	13.00 EA	400.00	5,200.00
173	F/O P-2 Lighting Fixtures	2.00 EA	350.00	700.00
174	F/I P-3 Pendant	1.00 EA	300.00	300.00
175	F/O DL Lighting Fixtures	14.00 EA	150.00	2,100.00
176	F/O SC Corridor Bathroom Wall Sconce	1.00 EA	300.00	300.00
177	F/O Emergency Wall Packs	2.00 EA	350.00	700.00
178	F/I UC Undercabinet LED Lighting	12.36 LF	45.00	556.20
179	LED CL Tenant Bathroom LED Cove Lighting	7.26 LF	85.00	617.10
180			**Lighting Fixtures Total**	**$10,473.30**
181			**Electrical Total**	**$28,679.30**
182	**Sub-Total (Base Cost)**			**$307,083.11**

Estimate Summary

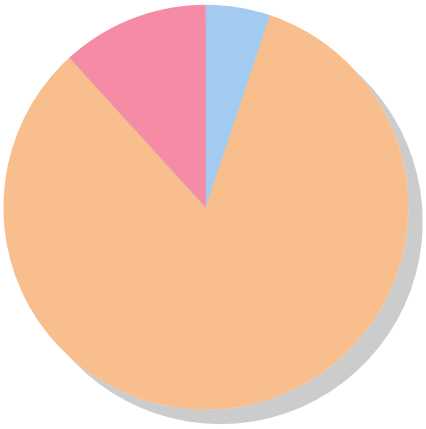

Material [$15,793]
Labor [$0]
SubContractor [$255,190]
Equipment [$0]
Other [$36,100]

Description		Total
Sub-Total (Base Cost)		$307,083.11
Sub-Total (Direct Cost)		$307,083.11
General Conditions	8.0000%	24,566.65
Fee	5.0000%	16,582.49
Insurance	3.0000%	10,446.97
Total Estimate		$358,679.21