TENER
General Contracting • Property Development

Status: Active Estimates
Contact:
Date: 03/06/2025

Estimate: 250033 Goodwill 14th Street

Estimate Unit Costs

Line	Description	Quantity	Unit Cost	Total
1	**01 General Requirements**			
2	**01.0040 Permitting**			
3	Permitting & Expediting	1.00 LS	3,000.00	3,000.00
4			**Permitting Total**	**$3,000.00**
5			**General Requirements Total**	**$3,000.00**
6	**02 Existing Conditions**			
7	**02.1500 Containers/Waste Removal**			
8	30-Yard Container	4.00 EA	925.00	3,700.00
9			**Containers/Waste Removal Total**	**$3,700.00**
10			**Existing Conditions Total**	**$3,700.00**
11	**03 Concrete**			
12	**03.1500 Concrete Cutting**			
13	Perform 4"-5" Core Drills	1.00 EA	725.00	725.00
14			**Concrete Cutting Total**	**$725.00**
15			**Concrete Total**	**$725.00**
16	**06 Wood , Plastic and Composites**			
17	**06.2200 Millwork**			
18	F/I Brass Foot Rail	15.29 LF	110.00	1,681.90
19	Fluted Wood Trim At Reception	37.13 LF	25.00	928.25
20	Millwork Base @ Cash Wrap	45.04 LF	25.00	1,126.00
21	Overlay Millwork Molding	115.02 LF	10.00	1,150.20
22	F/I Cashwrap	19.67 LF	371.85	7,314.25
23	F/I Lower Cabinets (Mid-Grade)	6.00 LF	371.85	2,231.09
24	F/I Upper Cabinets (Mid-Grade)	6.00 LF	371.85	2,231.09
25	F/I Millwork Panels	237.79 SF	50.00	11,889.50
26	F/I Plastic Laminate Countertops	71.80 SF	40.57	2,912.58
27			**Millwork Total**	**$31,464.85**
28			**Wood , Plastic and Composites Total**	**$31,464.85**
29	**07 Thermal and Moisture Protection**			
30	**07.3000 Roofing**			
31	Flash Roof Penetration	2.00 EA	1,200.00	2,400.00
32			**Roofing Total**	**$2,400.00**
33			**Thermal and Moisture Protection Total**	**$2,400.00**
34	**08 Openings**			
35	**08.1100 HM Doors, Frames & HW**			
36	F/O HM Frame (Single)	3.00 EA	365.00	1,095.00
37	F/O HM Frame (Pair)	1.00 EA	400.00	400.00
38	F/O Eliason Door	2.00 EA	850.00	1,700.00
39	F/O HM Door	3.00 EA	400.00	1,200.00
40	F/O Door Hardware	3.00 EA	500.00	1,500.00
41	F/O Door Hardware Including Crash Bar	2.00 EA	1,100.00	2,200.00

Line	Description	Quantity	Unit Cost	Total
42			**HM Doors, Frames & HW Total**	**$8,095.00**
43			**Openings Total**	**$8,095.00**
44	**09 Finishes**			
45	**09.2300 Drywall & Carpentry**			
46	F/I 5/8" GWB Walls	3,331.31 SF	2.44	8,120.78
47	Patch Existing GWB Walls	5,368.80 SF	1.39	7,478.62
48	F/I Wood Blocking	68.83 LF	10.45	719.09
49	F/I Blanket Insulation	346.95 SF	1.39	483.29
50	I/O Bath Accessories	1.00 BATH	417.89	417.89
51	I/O Interior HM Door, Frame & HW (Single)	3.00 EA	208.95	626.84
52	I/O Interior HM Doors, Frame & HW (Pair)	1.00 EA	348.24	348.24
53	F/I 3-5/8" Metal Stud Framing	1,785.49 SF	4.53	8,083.23
54			**Drywall & Carpentry Total**	**$26,278.00**
55	**09.6000 Flooring**			
56	F/I VCT	5,418.56 SF	4.50	24,383.52
57	F/I Luxury Vinyl Plank [Patcraft Click Refresh #1600V Haze 005000]	51.83 SF	12.00	621.96
58	F/I 4" Vinyl Base [Roppe #193 Black/Brown]	735.42 LF	4.75	3,493.25
59	F/I Standard Floor Prep	5,366.81 SF	0.50	2,683.41
60			**Flooring Total**	**$31,182.14**
61	**09.9100 Painting**			
62	Paint GWB Walls	3,100.01 SF	1.50	4,650.02
63	Paint GWB Walls	5,368.80 SF	1.50	8,053.20
64	Paint HM Door & Frame (Single)	3.00 EA	250.00	750.00
65	Paint HM Door & Frame (Pair)	1.00 EA	350.00	350.00
66			**Painting Total**	**$13,803.22**
67			**Finishes Total**	**$71,263.36**
68	**10 Specialties**			
69	**10.2600 Wall And Door Protection**			
70	F/I FRP Panels	100.71 SF	12.00	1,208.52
71			**Wall And Door Protection Total**	**$1,208.52**
72	**10.2800 Bath Accessories**			
73	F/O SMH Shelf With Mop Holder [Bobrick B-224x36]	1.00 EA	275.00	275.00
74	F/O Electric Hand Dryers [Xlerator XL-W]	1.00 EA	700.00	700.00
75	F/O Grab Bar 36" [Bobrick Model#B6806.36]	1.00 EA	55.00	55.00
76	F/O Grab Bar 42" [Bobrick Model#B6806.42]	1.00 EA	60.00	60.00
77	F/O TP Toilet Tissue (Paper) Dispenser [Kimberley Clark Model#117291]	1.00 EA	150.00	150.00
78	F/O Soap Dispenser [Gojo Model#H-2557]	1.00 EA	50.00	50.00
79	F/O MR Mirror (2'0""x3'0") [Bobrick B-165-2436]	1.00 EA	125.00	125.00
80			**Bath Accessories Total**	**$1,415.00**
81			**Specialties Total**	**$2,623.52**
82	**21 Fire Suppression**			

Line	Description	Quantity	Unit Cost	Total
83	**21.0000 Sprinkler**			
84	Sprinkler Allowance for Relocates	1.00 LS	3,200.00	3,200.00
85			**Sprinkler Total**	**$3,200.00**
86			**Fire Suppression Total**	**$3,200.00**
87	**22 Plumbing**			
88	**22.0000 Plumbing**			
89	I/O WC-1 Commercial Floor-Mounted Toilet [Toto PN:CST244EF#01]	1.00 EA	2,478.47	2,478.47
90	I/O SK-1 Lav Sink & Faucet [Glacier Bay/Elkay E-6032LWH-PFG1SS, 4" Wristblade Handle Faucet LK810GN05T4]	1.00 EA	1,817.55	1,817.55
91	I/O MS-1 Mop Sink [Mustee 24"x24"x10"]	1.00 EA	1,982.78	1,982.78
92	F/I WH-1 Eemax EMT-6 Hot Water Heater	1.00 EA	2,478.47	2,478.47
93	F/I 1-1/2" Type L Copper Piping	35.84 LF	107.40	3,849.23
94	F/I 1/2" Type L Copper Piping	61.05 LF	57.83	3,530.58
95	F/I 3" Hub + Spigot Cast Iron Piping	59.35 LF	74.35	4,412.92
96			**Plumbing Total**	**$20,550.00**
97	**22.4000 Plumbing Fixtures**			
98	F/O SK-1 Lav Sink [Glacier Bay/Elkay E-6032LWH-PFG1SS]	1.00 EA	600.00	600.00
99	F/O SK-1 Faucet 4" Wristblade Handle Faucet LK810GN05T4]	1.00 EA	300.00	300.00
100	F/O WC-1 Commercial Floor-Mounted Toilet [Toto PN:CST244EF#01]	1.00 EA	600.00	600.00
101	F/O MS-1 Mop Sink [Mustee 24"x24"x10"]	1.00 EA	850.00	850.00
102			**Plumbing Fixtures Total**	**$2,350.00**
103			**Plumbing Total**	**$22,900.00**
104	**23 Heating, Ventilating and Air-Conditioning**			
105	**23.0000 HVAC**			
106	Remove Refrigerant Supply And Suction Lines From AC Units	1.00 EA	1,331.65	1,331.65
107	Reclaim Refirgerant, Disconnect & Remove Existing AC-A Units & Associated Thermostats	3.00 EA	832.28	2,496.84
108	Remove Ductwork	31.00 LF	41.61	1,290.03
109	Clean Existing Ductwork	424.72 LF	16.65	7,069.71
110	F/I FD-2 Fire Damper	1.00 EA	416.14	416.14
111	F/I FD-1 Fire Damper	1.00 EA	416.14	416.14
112	F/I AC-A-1 Indoor Unit 5 Ton [Carrier FJDNXD60L00]	1.00 EA	8,322.79	8,322.79
113	F/I AC-A-2 Indoor Unit 5 Ton [Carrier FJDNXD60L00]	1.00 EA	8,322.79	8,322.79
114	F/I AC-A-3 Indoor Unit 5 Ton [Carrier FJDNXD60L00]	1.00 EA	8,322.79	8,322.79
115	Ductwork Insulated (Per LB)	589.94 LB	30.79	18,166.83
116	Thermostats	3.00 EA	832.28	2,496.84
117	F/I RG2 Return Grill	3.00 EA	499.37	1,498.10
118	F/I CD1 Diffusers	2.00 EA	499.37	998.73
119	F/I RG1 Return Grill	2.00 EA	499.37	998.73
120	F/I RG-3 Return Grill	1.00 EA	499.37	499.37
121	F/I RG-4 Return Grill	1.00 EA	499.37	499.37
122	F/I EF-1 Exhaust Fan - Aeropure Fans AP124-SL	1.00 EA	450.00	450.00

Line	Description	Quantity	Unit Cost	Total
123	F/I ACCU-1 Condensers [5 Ton Carrier 25HPB660A0050]	1.00 EA	18,310.13	18,310.13
124	F/I ACCU-2 Condensers [5 Ton Carrier 25HPB660A0050]	1.00 EA	18,310.13	18,310.13
125	F/I ACCU-3 Condensers [5 Ton Carrier 25HPB660A0050]	1.00 EA	18,310.13	18,310.13
126	Pre-Demo Air Balancing Report	1.00 EA	8,322.79	8,322.79
127			**HVAC Total**	**$126,850.00**
128			**Heating, Ventilating and Air-Conditioning Total**	**$126,850.00**
129	**26 Electrical**			
130	**26.0000 Electric**			
131	Tel Data Conduit And Back Boxes Only	3.00 EA	411.43	1,234.29
132	Duplex Receptacle (Commercial)	18.00 EA	240.00	4,320.00
133	Quad Receptacle (Commercial)	2.00 EA	322.29	644.57
134	GFI Receptacle (Commercial)	1.00 EA	342.86	342.86
135	Wire Hand Dryers	1.00 EA	452.57	452.57
136	Wire HVAC Equipment	3.00 EA	1,782.86	5,348.57
137	Wire Hot Water Heater [HWH] (120V)	1.00 EA	651.43	651.43
138	I/O Lighting Fixture	22.00 EA	240.00	5,280.00
139	I/O Lighting Fixture (Commercial)	6.00 EA	240.00	1,440.00
140	I/O Exit Sign	7.00 EA	240.00	1,680.00
141	Disconnect Switch For HWH	1.00 EA	205.71	205.71
142	F/I Wattstopper Push Button Wall Switch With Integral Dual-Technology Vacancy Sensor	3.00 EA	411.43	1,234.29
143	Electrical Disconnects Prior to Demo (Small)	1.00 EA	1,165.71	1,165.71
144			**Electric Total**	**$24,000.00**
145	**26.5000 Lighting Fixtures (Budgetary)**			
146	F/O Type A Lighting Fixture [GE ELO60A3-GVWHITE]	12.00 EA	650.00	7,800.00
147	F/O Type B Lighting Fixture [Konlite KK-PS-14DW-40-LFSZ, 1'x4']	4.00 EA	110.00	440.00
148	F/O Type D Lighting Fixture [Aspect LED Fixture: AL-CP-2424/ROPE, Swing: AL-CP-SL]	1.00 EA	350.00	350.00
149	F/O Type E Lighting Fixture [Artika VAN-EB, Chrome 27" Bubble Bar LED]	1.00 EA	150.00	150.00
150	F/O Emergency (EM) Lighting Fixture	10.00 EA	75.00	750.00
151	F/O Exit Sign Type C [Beghelli PCH-R-SA-AT With 90-Minute Battery Backup]	2.00 EA	160.00	320.00
152	F/O Exit Sign Type A [Beghelli BRU-HT-LRUM With 90-Minunte Battery Backup]	5.00 EA	225.00	1,125.00
153			**Lighting Fixtures (Budgetary) Total**	**$10,935.00**
154			**Electrical Total**	**$34,935.00**
155	**Sub-Total (Base Cost)**			**$311,156.73**

Estimate Summary

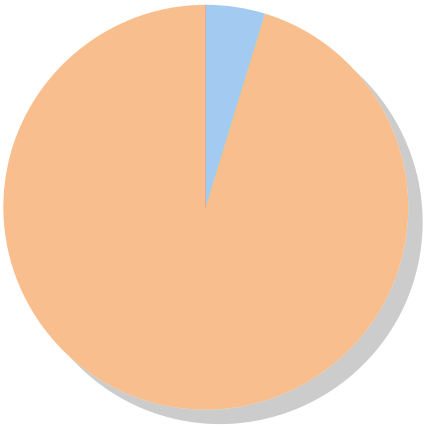

Material [$14,700]
Labor [$0]
SubContractor [$296,457]
Equipment [$0]
Other [$0]

Description		Total
Sub-Total (Base Cost)		$311,156.73
Material	6.0000%	882.00
Labor	6.0000%	0.00
SubContractor	6.0000%	17,787.40
Equipment	6.0000%	0.00
Other	6.0000%	0.00
Sub-Total (Direct Cost)		$329,826.13
General Conditions	12.0000%	39,579.14
OH&P	12.0000%	44,328.63
Insurance	4.0000%	16,549.36
Total Estimate		$430,283.26