Montana Contracting Corp.
173 North Route 9W
Congers, NY, 10920
(845) 398-1778

Date: 02/17/2025

Dave Benky
The Culinary Institute Of America
1946 Campus Drive
Hyde Park, NY 12538-1499

Re: CIA - Alumni Walk Rev. 1

Proposal

Montana Contracting Corp. will furnish all necessary supervision, labor, materials and equipment to build the above-referenced project for the sum of: **$143,694**

Attachments:
Scope of Work
Schedule of Values
Notes and Clarifications

All work will be done in a professional and workman-like manner, licensed as required by law. All work to be fully covered with compensation and liability insurances.

Thank you for the opportunity.

Very truly yours,

Steve Catalanotto
Montana Contracting Corp.

Accepted By: _____

Date of Acceptance: _____

Montana Contracting Corp.
173 North Route 9W
Congers, NY, 10920
(845) 398-1778

Scope of Work

1. Montana will start by setting up a temporary chain link fence around the work area.
2. The Removal of the existing walk way will begin and a container will need to be dropped on site to dispose of debris.
3. The footings will be dug, formed and poured.
4. A space will be required to store the new pavers.
5. The new stone and paver walkway will be placed maintain the existing base as requested.
6. The new concrete sidewalk will be poured and the stop sign moved to the new location as shown.
7. Any equipment used will be stored within the temporary fence.
8. At the completion of the walkway the surrounding area will be brought back to existing conditions.

MONTANA CONTRACTING

Status: Active Estimates
Contact:
Date: 02/17/2025

Estimate: 25002 CIA - Alumni Walk Rev. 1

Estimate Cost Totals

Description	Total	Percent of Cost	Cost/Unit
01 General Requirements			
01.0050 General Requirements	$9,684	6.74%	
01.5000 Temporary Fencing	$4,176	2.91%	
02 Existing Conditions			
02.1000 Demolition	$4,320	3.01%	
02.1500 Containers/Waste Removal	$2,280	1.59%	
03 Concrete			
03.1000 Concrete	$8,208	5.71%	
32 Exterior Improvements			
32.1400 Hardscaping	$82,308	57.28%	
32.9300 Landscaping	$4,320	3.01%	
Sub-Total ()	**$115,296**	**80.24%**	
Overhead	$11,530	8.02%	
Profit	$12,683	8.83%	
Insurance	$4,185	2.91%	
Total Estimate	**$143,694**	**100%**	

Montana Contracting Corp.
173 North Route 9W
Congers, NY, 10920
(845) 398-1778

Notes and Clarifications

1. Pricing is valid for sixty (60) calendar days.
2. All work to be performed during normal working hours. Overtime is not included.
3. Pricing is based on using open shop labor.
4. Permits and fees are not included.
5. Winter additive, ground thawing and/or blankets for concrete is not included.
6. Rock removal is not included.
7. Snow/ice removal is not included.
8. Dewatering is not included.
9. Removal of unsuitable soils is not included.
10. We have included 5% attic stock of the smaller pavers and 40 2'x2' Pavers.
11. We have included the engraving of 36 2'x2' pavers and the granite at both end of the path.
12. The engraving included should be sufficient barring a drastic change in design.
13. Our price assumes that the existing paver sub-base will be usable.
14. We will require a parking space to place a dumpster near by.
15. 18 Engraved 2'x2' pavers will be installed the first round and 18 will be provided for the second round.
16. The return trip for the 18 engraved pavers for the second round is excluded pending locations.
17. We have included temporary fencing around the site.

Deducts

1. Engraving of the second set of 18 2'x2' pavers **-$21,267**
2. Engraving of the second set of 18 2'x2' pavers **-$21,267**

6 x 9 - Pavingstones with ArmorTec

The RoundTable 6 x 9 pavers have a slightly dimpled surface to give them a natural look & feel.

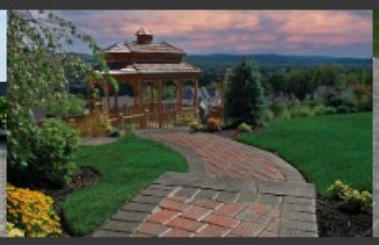

Description:

The RoundTable 6 x 9 pavers have a slightly dimpled surface to give them a natural look & feel. Mix and Match shapes from The RoundTable Collection 6 X 6 and 6 X 9 with the 6 x 6 and 6 x 9 shapes from The Renaissance and KingsCourt Collections for unique and one-of-a-kind design configurations.

Specifications:

6 x 9

Application Restrictions:

None

Color Selection:

Bluestone Blend

Coal

Limestone Quarry Blend

Mocha

Onyx

Onyx/Natural

"They'll Look Like New Forever."

Cambridge Pavingstones With ArmorTec®

www.cambridgepavers.com

3 PC. LEDGESTONE III™ KITS FEATURE NATURAL CLEFTS FOUND IN BLUESTONE

Shown in Sahara/Chestnut with matching Maytrx® 6 Column Kit.

LEDGESTONE III™
Large Units With Natural Clefts In A 3-Pc. Modular Design:

- 13 1/4" x 8 13/16"
- 8 13/16" x 8 13/16"
- 8 13/16" x 4 3/8"

Choose ArmorTec® or distressed, crafted with EuroTec®.

Available Colors With ArmorTec:

- Chestnut/Bronze
- Chestnut/Salmon
- Golden/Onyx
- Onyx/Chestnut
- Onyx/Natural
- Ruby/Onyx
- Sahara/Chestnut
- Salmon/Onyx
- Toffee/Onyx

Available Colors With EuroTec:

- Sahara
- Golden/Onyx
- Onyx/Natural
- Ruby/Onyx
- Sahara/Chestnut
- Toffee/Onyx

PRE-PACKAGED COLUMN KIT

Everything needed to build a 4 ft. high column simply and accurately. No cutting is required. A 6" cavity is left in the center for wiring an electrical fixture.

Choose from Split Face or Tumbled Renaissance Stone in an array of colors (Shown in Split Face Sahara/Chestnut).

Recommended Laying Patterns For

CAMBRIDGE LEDGESTONE III FROM THE SHERWOOD COLLECTION

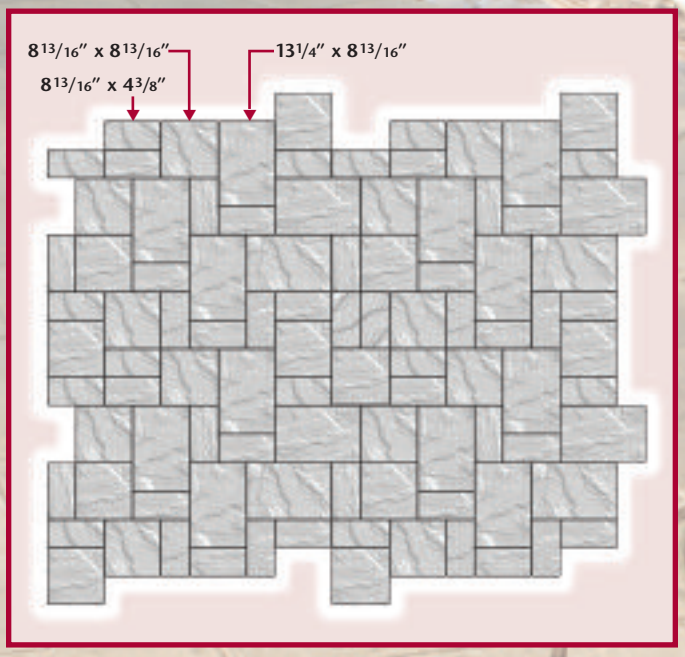

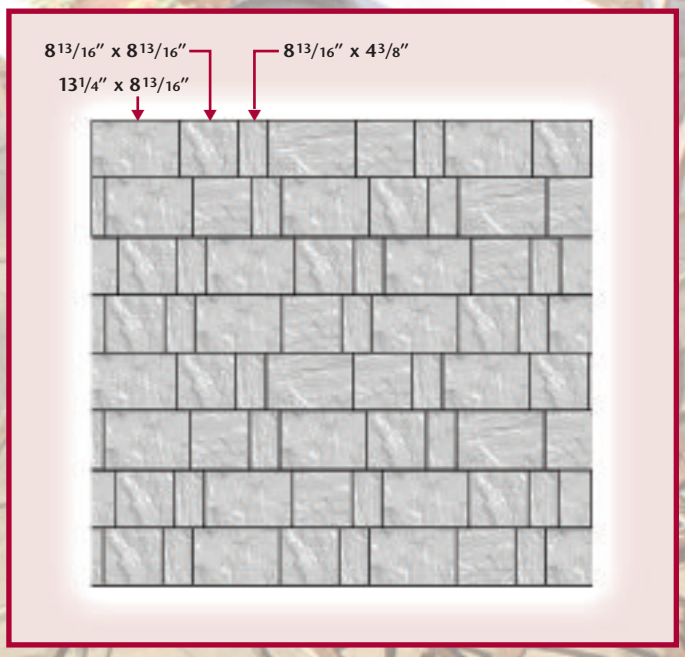

Random Pattern

Start at a corner of the area to be paved. Alternate shapes remembering that each shape is a modular size within the 3-pc. Kit. Change directions and avoid set patterns. Lay pavers so that the length of any continuing joint (seam) does not exceed 36". This will assure the look of "random placement".

Staggered Running Bond Pattern

Start at a corner of the area to be paved. Establish an initial sequence of sizes by laying each of the three shapes in a row. Maintain the repetition in the same order over the entire design. For best appearance, offset joints between each row.

Proper Handling

Ledgestone III has no chamfers. Handle with care when removing from the cube prior to installation. As a precaution against scuffing when compacting Cambridge Ledgestone III Pavingstones from The Sherwood Collection and also any shapes from The RoundTable Collection, a compactor with a bolt-on urethane protection mat should be used. As an alternative, place a heavy-duty geotextile (filter fabric) over the pavers prior to compaction.

Recommended Border Treatments For Cambridge Ledgestone III

Random Pattern:

1. Select any one of the three shapes in the Ledgestone III Kit (Example: all 8 13/16" x 8 13/16").
2. Choose any two of the three shapes in the Kit (Example: 13 1/4" x 8 13/16" and 8 13/16" x 4 3/8") and alternate them.
3. Use all three shapes (8 13/16" x 8 13/16", 13 1/4" x 8 13/16" and 8 13/16" x 4 3/8") in equal or unequal combinations.
4. Choose a borderless design. Using Cambridge Curbstone or Edgestone, a Cambridge Wall System or PAVE EDGE® for an edge restraint, cut the perimeter of the field to meet the edge restraint, which follows the contour of the natural landscape.

Staggered Running Bond Pattern:

1. Use only 8 13/16" x 4 3/8" shapes. There are a sufficient number of pieces of this size in a cube for a border.
2. Choose a borderless design by continuing the running bond pattern up to the edge restraint.

"They'll Look Like New Forever."

Cambridge Pavingstones

With ARMORTEC®

Cambridge Pavers Inc. • PO Box 157 • Lyndhurst, NJ 07071-0157

www.cambridgepavers.com

12/06