FOR ALL YOUR WELDING NEEDS

Pauli D's Mobile Welding Inc.

JOB PROPOSAL

Prepared for: Montana Contracting
Address: 173 Route 9W
Valley Cottage, NY 10920
Project: Cresthouse
Crest Rd
Cold Spring, NY 10516

Pricing for Structural and miscellaneous metals at Cresthouse project, Cold Springs, NY.

Work to Include the following:

Structural steel as per drawings: S000, S001, S002, S003, S004, S100, S101, S102, S103, S200, S201, S202, S203, S204, S205, S206, S300, S301, S302.

1. Shop drawings for approval.
2. Hot dip galvanize all exterior members.
3. Supply anchor bolt assemblies, to be installed by mason.
5. All steel to be shop primed grey.
6. Shear studs for first and second level framing.
7. Supply decking for first, second and roof levels. Install ONLY first and second floor decking. *Roof decking to be installed by light gauge framer.
8. Supply and install 2-C10X25 stringer stairs with 1/4" bent plate treads with open rise. Cable rails at center of stair. *Clarification needed on rail detail. Attached is proposed detail of what we intend to use. Stair treads and stringers to be painted grey. Finished painting to be done by others. Rail frame to be aluminum with powder coated finish.

9. Supply and install 194' at exterior cable rail. Rail components to be aluminum frame and stainless steel cable. *See attached detail*

Price for aluminum is the same as hot dip galvanizing as specified on drawings. This will be used instead of hot dip, due to the bending and poor adherence of paint to galvanize.

10. Install two lines of safety cable around first and second floor perimeter and openings.

11. Pauli D's to Provide all labor, trucking, lifts and cranes to complete project.

CONTRACT PRICING $628,000.00

1st Payment Due upon signing of proposal for steel and shop drawings.	$209,333.34
2nd Payment Due when fabricated steel is delivered to site which will be the day of erection.	$209,333.33
3rd Payment Due upon completion and after inspection. NOT TO EXCEED 30 DAYS.	$209,333.33
Total	$628,000.00

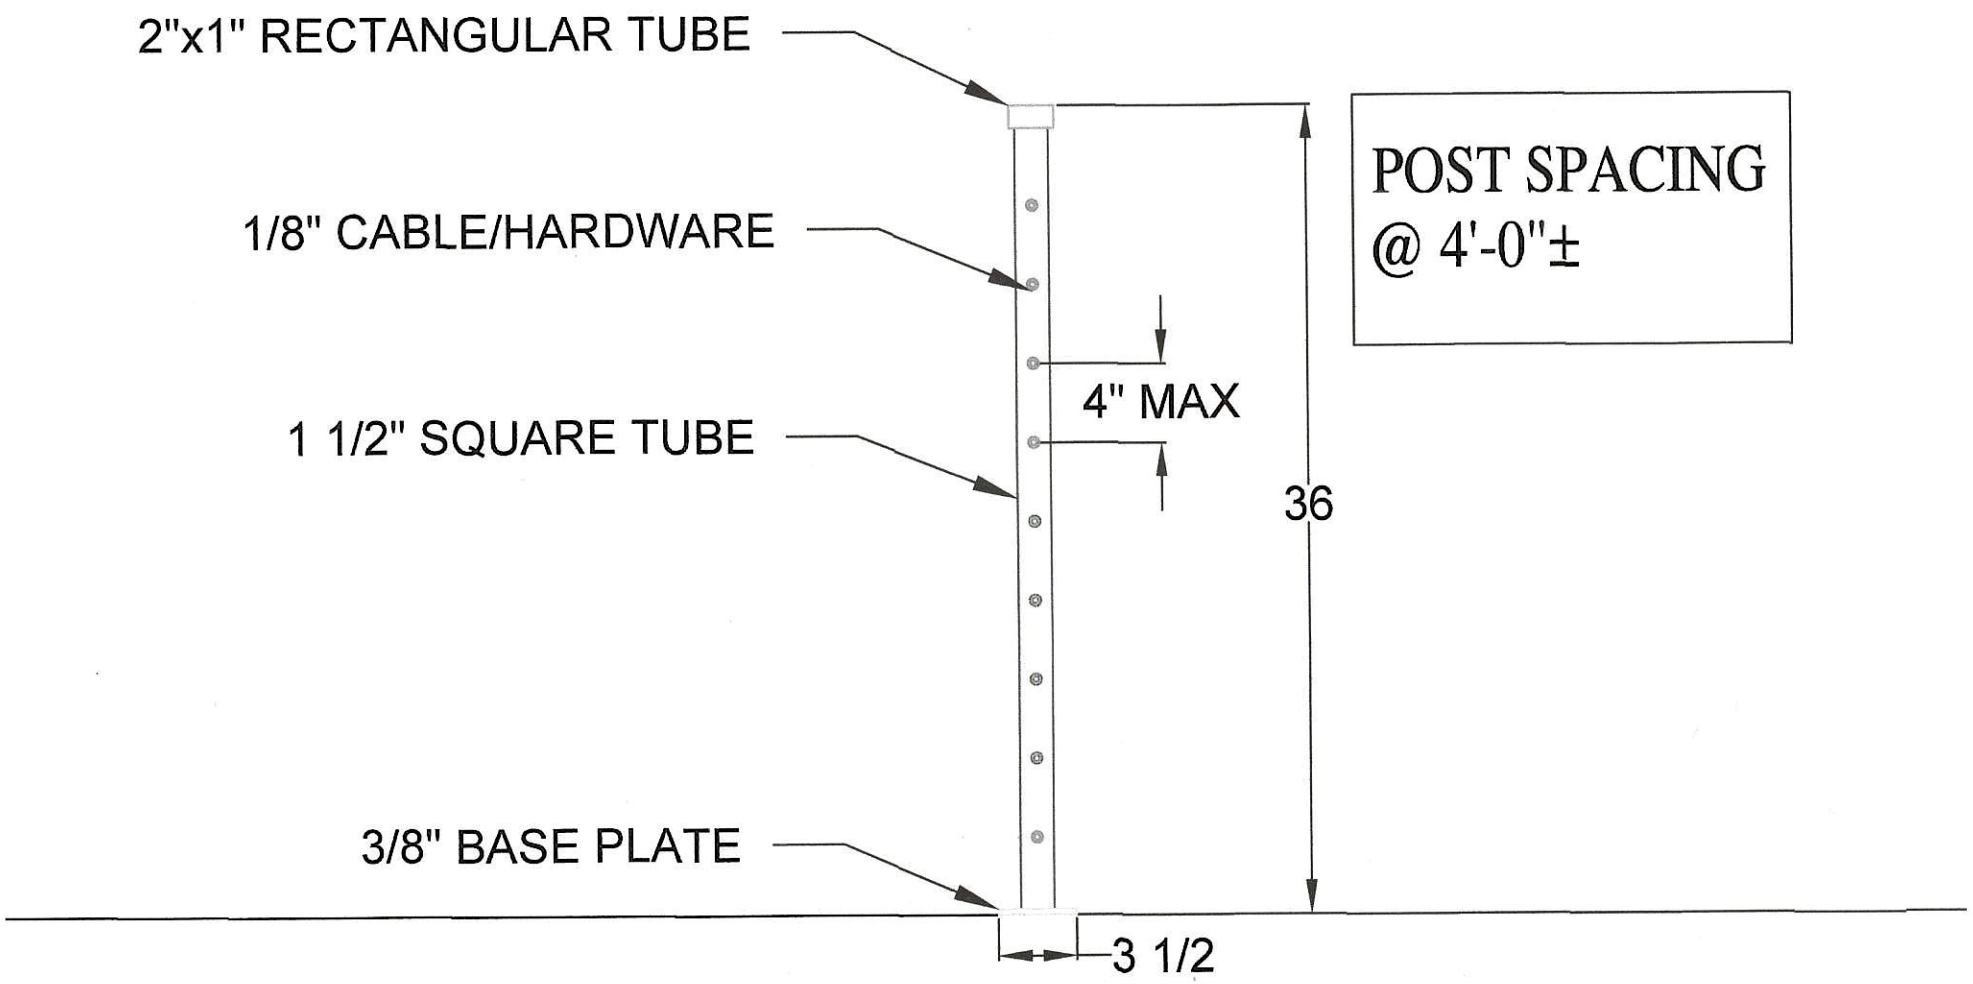
2"x1" RECTANGULAR TUBE
1/8" CABLE/HARDWARE
1 1/2" SQUARE TUBE
3/8" BASE PLATE
4" MAX
36
3 1/2
POST SPACING
@ 4'-0"±

DETAIL