MILLBROOK
CABINETRY & DESIGN

PO Box 1117
2612 Route 44
Millbrook NY 12545

Phone: 845-677-3006
Fax: 845-677-3759

5/28/25

Montana Contracting
173 Route 9W, Congers NY 10920
Ines MacAdam

Project Name: 891 South Hill Rd – The Woodland

Bid Package: Interior Doors
Manufacturer: Upstate Door

Bid Package Details:

- Main house units are primed poplar
- Includes machining for ball bearing hinges to match Stanley FBB 191 as specified
- 4-9/16" flat jambs with applied stops (DS-102)
- 001B - 1-3/8" thick doors over 84" are not warrantied against warping. Increased the thickness to 1-3/4" to maintain warranty. All other doors are as specified.
- 006B style is not called out. Included as a flush door
- Pocket door 007B includes additional 1" to head rail and one stile
- Sliding doors 011A and 012B quoted as slabs only. Both slabs at 30" width
- Guest House and Garage doors 700B, 701A, 801C are stain grade plain sawn white oak, sanded
- 801C includes 60 minute fire rating. Increased door thickness to 1-3/4" to achieve fire rating. Includes weatherstripping (black) and fire rated Cap Sweep. Includes bore prep and strike prep
- Lead time is currently 11 weeks from approved shop drawings

Costs:

Main House	$14,557.00
Guest House & Garage	$9,757.80
Shipping	$303.75
Tax @ 8.125%	$1,999.93
Grand Total	**$26,614.48**

Payment Terms:

10% deposit for shop drawings
50% due to place order
100% due prior to delivery

**Purchaser is responsible for receiving material delivery, including but not limited to; delivery date and site coordination, material handling, storage, heavy equipment rental/operation, road closures, etc.*
**Each material delivery must be received in one (1) business day*
**Millbrook Cabinetry & Design is not responsible for storing material if it cannot be delivered to site once ready to ship from manufacturer*

Upstate Door
Retail Quote

Quote Date	5/28/2025
Salesman	
Quote Number	1034286

MILLBROOK
— CABINETRY & DESIGN —

SOLD BY:
Millbrook Cabinetry & Design
2612 Route 44, Millbrook NY 12545
Andrew McNulty
845-222-4358 (Direct)
andrew@millbrookcabinetryanddesign.com

SOLD TO:
N/A

Quote Name: 891 South Hill - Interior Doors
Project Name: Unassigned Project

Subtotal:	$24,614.55
Tax:	$1,999.93
Total:	$26,614.48

Lead Time: Within 11 weeks *from finalized order*.
Lead Time is production lead time. Please add 5 business days for delivery.
Delivery: Included to tailgate of truck for distribution by others.
Changes: Minimum of $500 or 5% (whichever is higher)
charge for changes after order is processed.
A quote from Upstate Door does not constitute acceptance of an order.

**All errors are subject to correction; estimate is valid for 7 days.
**Customer is responsible for verifying all information is correct before order is approved.
**All orders are produced in accordance with Upstate's approved paperwork.
**Any changes to specs, door list or delivery address, must be noted on Upstate paperwork prior to sign off.
**Any claims for damaged or missing items must be submitted to Upstate within 5 days of delivery.
**Please see www.upstatedoor.com for complete warranty information.
**Due to the unprecedented volitivity of lumber costs, Upstate door can only hold pricing on quotes for 7 days. If quote goes to order after 7 days, Upstate reserves the right to adjust pricing according to the current market prices for that day.
**Customer agrees to pay for product when complete and current moving/storage fees (after end lead time date) if they decline accepting delivery when done.

Quote Notes:

UPSTATE DOOR®

FINE DOOR SOLUTIONS... ONE SOURCE

About Upstate Door

Upstate Door specializes in unique, one-of-a-kind fine door solutions. We are a hardwood door company that creates custom exterior, interior, and screen/storm doors. We build high-quality, hand-crafted doors that will last for years to come. Upstate Door works with you to build fine door solutions that are unique in every way. Built to your design specifications, our doors allow you to create a seamless flow of design throughout a home.

What Makes Us Different

Company Differentiators		Upstate Door		Other Wood Door Suppliers
Customization	✓	Can customize any aspect of the door	✗	Not always available
Ways to Communicate	✓	We will communicate face-to-face, over the phone, live chat, email, or virtually to assist any and all customer needs	✗	Difficult to access someone quickly and easily
Deliver on Own Trucks	✓	Deliver on our own fleet, reducing the risk of damage or shipping error. We also offer upgraded packaging options.	✗	Does not deliver on their own trucks or offer upgraded packaging options
Samples and High Quality Drawings	✓	We offer samples and high level drawings as part of the design process	✗	Samples typically not available, and low level drawings are received
Color & Grain Matching	✓	Lumber is hand selected and always matches color and grain	✗	Color and grain are inconsistent and do not match
Finishing Options	✓	Factory finishing is available. Split finishing can be done on the front vs. back, jambs can be finished differently than the door	✗	Factory finishing is unavailable
Mill and Hang Our Own Jambs	✓	Jambs are custom made from the same wood the door is made from	✗	Prefabricated, low quality jambs
Service Solutions	✓	Offering collaborative solutions before, during, and after the sale of a door package	✗	Difficult to access someone quickly and get knowledgeable answers & solutions

Have You Considered Us For...

Exterior Doors

Interior Doors

Screen / Storm

Specialty

QUOTE NAME	QUOTE NUMBER	PRINTED BY	Printed On
891 South Hill - Interior Doors	1034286	AMcNulty	5/28/2025 7:34:36 PM

Line #	Qty	Room	Unit	Jamb	Swing	Door	PH	PF	Total Price	Details
100-1	1	001B	2@ 1.75" x 24" x 96"	.75" x 4.5625"	Double Door Both Active	$1,620.00	$410.40	$0.00	$2,030.40	PG | Poplar D0001 IN | Unit with Jamb
200-1	1	004A	1 375" x 36" x 80"	.75" x 4.5625"	RH	$603.45	$282.15	$0.00	$885.60	PG | Poplar D0001 IN | Unit with Jamb
300-1	1	005A	1 375" x 36" x 80"	.75" x 4.5625"	RH	$603.45	$282.15	$0.00	$885.60	PG | Poplar D0001 IN | Unit with Jamb
400-1	1	006A	1 375" x 34" x 80"	.75" x 4.5625"	LH	$587.25	$282.15	$0.00	$869.40	PG | Poplar D0001 IN | Unit with Jamb
500-1	1	006B	1 375" x 18.5" x 80"	.75" x 4.5625"	LH	$461.70	$278.10	$0.00	$739.80	PG | Poplar D0001 IN | Unit with Jamb
600-1	1	007B	1 375" x 36" x 80"		Pocket	$637.20	$0.00	$0.00	$637.20	PG | Poplar D0001 IN | Slab Only
700-1	1	009A	1 375" x 34" x 80"	.75" x 4.5625"	RH	$587.25	$282.15	$0.00	$869.40	PG | Poplar D0001 IN | Unit with Jamb
800-1	1	009B	2@ 1.375" x 24" x 80"	.75" x 4.5625"	Double Door Both Active	$1,012.50	$391.50	$0.00	$1,404.00	PG | Poplar D0001 IN | Unit with Jamb
900-1	1	009C	2@ 1.375" x 24" x 80"	.75" x 4.5625"	Double Door Both Active	$1,012.50	$391.50	$0.00	$1,404.00	PG | Poplar D0001 IN | Unit with Jamb
1000-1	1	010A	1 375" x 34" x 80"	.75" x 4.5625"	RH	$587.25	$282.15	$0.00	$869.40	PG | Poplar D0001 IN | Unit with Jamb
1100-1	1	011A	1 375" x 34" x 80"	.75" x 4.5625"	LH	$587.25	$282.15	$0.00	$869.40	PG | Poplar D0001 IN | Unit with Jamb
1200-1	2	011B	1 375" x 30" x 80"		Door Only	$1,109.70	$0.00	$0.00	$1,109.70	PG | Poplar D0001 IN | Slab Only
1300-1	1	012A	1 375" x 34" x 80"	.75" x 4.5625"	RH	$587.25	$282.15	$0.00	$869.40	PG | Poplar D0001 IN | Unit with Jamb
1400-1	2	012B	1 375" x 30" x 80"		Door Only	$1,109.70	$0.00	$0.00	$1,109.70	PG | Poplar D0001 IN | Slab Only
1500-1	1	700B	1 75" x 24" x 80"	.75" x 4.5625"	LH	$1,449.90	$468.45	$0.00	$1,918.35	SG | White Oak (Plain Sawn D0001 IN | Unit with Jamb
1600-1	1	701A	1 75" x 34" x 80"	.75" x 4.5625"	RH	$1,715.85	$483.30	$0.00	$2,199.15	SG | White Oak (Plain Sawn D0001 IN | Unit with Jamb
1700-1	1	801C	1 75" x 36" x 80"	1.00" x 4.6875"	RH	$4,089.15	$1,551.15	$0.00	$5,640.30	SG | White Oak (Plain Sawn D0001 IN | Unit with Jamb

Freight:	$303.75
Subtotal:	$24,614.55
Tax:	$1,999.93
Total:	$26,614.48

Signature _____ **Date** _____

Line #	Description		Unit Price	Qty	Ext. Price
100-1	**Comment/Room:** 001B **Frame Size:** 49.5" X 98" **Flush Door:** 2 @ 1.75" x 24" x 96" Interior | PG | Poplar **Layout:** D0001 **Swing:** Double Door Both Active **Core Material:** Solid LSL Core **Face Material:** .125" Fiberex **Edgebanding:** 1.25" Edgeband (.875" Flat / .375" Tongue) **Fitting Prep:** Downsize and Bevel | Prefit in Jamb | 0.125" Prehang Reveal | 0.125" Prehang Reveal **Includes:** **Hanging Option:** Ship Jambs Knocked Down **Jamb:** .75" x 4.5625" PG Poplar Flat Jamb | Solid Wood | DS-102 Stop (Tacked in Loose) NO RELIEF CUTS **Weatherstripping:** **Door Bottom:** **Sill:**	**Hinge Side Casing:** **Non-Hinge Side Casing:** **Mull Pocket:** **Exterior Mull Covers:** N/A **Interior Mull Covers:** N/A **Hardware:** Machine Only | 5" x 5"Hinges | Stanley FBB191 | Ball Bearing | Square Corner | Qty (8) Total **Machining:** Machined per template | Standard Hinge Layout **Lockset Prep:** **Inactive Door Hardware and Prep:** N/A (NO INACTIVE DOOR HARDWARE CONFIGURED) **Includes:** **Door Finishing Option:** White Acrylic Primer, Multiple Seal Coats Required in Field. **Jamb Finishing Option:** White Acrylic Primer, Multiple Seal Coats Required in Field. **Special Instructions:**	$2,030.40	1	$2,030.40

Line #	Description		Unit Price	Qty	Ext. Price
200-1	**Comment/Room:** 004A **Frame Size:** 37.5" X 82" **Flush Door:** 1 @ 1.375" x 36" x 80" Interior | PG | Poplar **Layout:** D0001 **Swing:** RH **Core Material:** Solid LSL Core **Face Material:** .125" Fiberex **Edgebanding:** 1.25" Edgeband (.875" Flat / .375" Tongue) **Fitting Prep:** Downsize and Bevel | Prefit in Jamb | 0.125" Prehang Reveal | 0.125" Prehang Reveal **Includes:** **Hanging Option:** Ship Jambs Knocked Down **Jamb:** .75" x 4.5625" PG Poplar Flat Jamb | Solid Wood | DS-102 Stop (Tacked in Loose) NO RELIEF CUTS **Weatherstripping:** **Door Bottom:** **Sill:**	**Hinge Side Casing:** **Non-Hinge Side Casing:** **Mull Pocket:** **Exterior Mull Covers:** N/A **Interior Mull Covers:** N/A **Hardware:** Machine Only | 5" x 5"Hinges | Stanley FBB191 | Ball Bearing | Square Corner | Qty (3) Total **Machining:** Machined per template | Standard Hinge Layout **Lockset Prep:** **Inactive Door Hardware and Prep:** N/A **Includes:** **Door Finishing Option:** White Acrylic Primer, Multiple Seal Coats Required in Field. **Jamb Finishing Option:** White Acrylic Primer, Multiple Seal Coats Required in Field. **Special Instructions:**	$885.60	1	$885.60

Line #	Description	Unit Price	Qty	Ext. Price
300-1	**Comment/Room:** 005A **Frame Size:** 37.5" X 82" **Flush Door:** 1 @ 1.375" x 36" x 80" Interior | PG | Poplar **Layout:** D0001 **Swing:** RH **Core Material:** Solid LSL Core **Face Material:** .125" Fiberex **Edgebanding:** 1.25" Edgeband (.875" Flat / .375" Tongue) **Fitting Prep:** Downsize and Bevel | Prefit in Jamb | 0.125" Prehang Reveal | 0.125" Prehang Reveal **Includes:** **Hanging Option:** Ship Jambs Knocked Down **Jamb:** .75" x 4.5625" PG Poplar Flat Jamb | Solid Wood | DS-102 Stop (Tacked in Loose) NO RELIEF CUTS **Weatherstripping:** **Door Bottom:** **Sill:** **Hinge Side Casing:** **Non-Hinge Side Casing:** **Mull Pocket:** **Exterior Mull Covers:** N/A **Interior Mull Covers:** N/A **Hardware:** Machine Only | 5" x 5"Hinges | Stanley FBB191 | Ball Bearing | Square Corner | Qty (3) Total **Machining:** Machined per template | Standard Hinge Layout **Lockset Prep:** **Inactive Door Hardware and Prep:** N/A **Includes:** **Door Finishing Option:** White Acrylic Primer, Multiple Seal Coats Required in Field. **Jamb Finishing Option:** White Acrylic Primer, Multiple Seal Coats Required in Field. **Special Instructions:**	$885.60	1	$885.60

Line #	Description	Unit Price	Qty	Ext. Price
400-1	**Comment/Room:** 006A **Frame Size:** 35.5" X 82" **Flush Door:** 1 @ 1.375" x 34" x 80" Interior | PG | Poplar **Layout:** D0001 **Swing:** LH **Core Material:** Solid LSL Core **Face Material:** .125" Fiberex **Edgebanding:** 1.25" Edgeband (.875" Flat / .375" Tongue) **Fitting Prep:** Downsize and Bevel | Prefit in Jamb | 0.125" Prehang Reveal | 0.125" Prehang Reveal **Includes:** **Hanging Option:** Ship Jambs Knocked Down **Jamb:** .75" x 4.5625" PG Poplar Flat Jamb | Solid Wood | DS-102 Stop (Tacked in Loose) NO RELIEF CUTS **Weatherstripping:** **Door Bottom:** **Sill:** **Hinge Side Casing:** **Non-Hinge Side Casing:** **Mull Pocket:** **Exterior Mull Covers:** N/A **Interior Mull Covers:** N/A **Hardware:** Machine Only | 5" x 5"Hinges | Stanley FBB191 | Ball Bearing | Square Corner | Qty (3) Total **Machining:** Machined per template | Standard Hinge Layout **Lockset Prep:** **Inactive Door Hardware and Prep:** N/A **Includes:** **Door Finishing Option:** White Acrylic Primer, Multiple Seal Coats Required in Field. **Jamb Finishing Option:** White Acrylic Primer, Multiple Seal Coats Required in Field. **Special Instructions:**	$869.40	1	$869.40

Line #	Description	Unit Price	Qty	Ext. Price
500-1	**Comment/Room:** 006B **Frame Size:** 20" X 82" **Flush Door:** 1 @ 1.375" x 18.5" x 80" Interior | PG | Poplar **Layout:** D0001 **Swing:** LH **Core Material:** Solid LSL Core **Face Material:** .125" Fiberex **Edgebanding:** 1.25" Edgeband (.875" Flat / .375" Tongue) **Fitting Prep:** Downsize and Bevel | Prefit in Jamb | 0.125" Prehang Reveal | 0.125" Prehang Reveal **Includes:** **Hanging Option:** Ship Jambs Knocked Down **Jamb:** .75" x 4.5625" PG Poplar Flat Jamb | Solid Wood | DS-102 Stop (Tacked in Loose) NO RELIEF CUTS **Weatherstripping:** **Door Bottom:** **Sill:** **Hinge Side Casing:** **Non-Hinge Side Casing:** **Mull Pocket:** **Exterior Mull Covers:** N/A **Interior Mull Covers:** N/A **Hardware:** Machine Only | 5" x 5"Hinges | Stanley FBB191 | Ball Bearing | Square Corner | Qty (3) Total **Machining:** Machined per template | Standard Hinge Layout **Lockset Prep:** **Inactive Door Hardware and Prep:** N/A **Includes:** **Door Finishing Option:** White Acrylic Primer, Multiple Seal Coats Required in Field. **Jamb Finishing Option:** White Acrylic Primer, Multiple Seal Coats Required in Field. **Special Instructions:**	$739.80	1	$739.80

Line #	Description	Unit Price	Qty	Ext. Price
600-1	**Comment/Room:** 007B **Frame Size:** 36" X 80.125" **Flush Door:** 1 @ 1.375" x 36" x 80" Interior | PG | Poplar | Adding 1.00" to top rail | Adding 1.00" to one stile **Layout:** D0001 **Swing:** Pocket **Core Material:** Solid LSL Core **Face Material:** .125" Fiberex **Edgebanding:** 1.25" Edgeband (.875" Flat / .375" Tongue) **Fitting Prep:** Full and Square | 0.125" Prehang Reveal **Includes:** **Hardware:** **Machining:** **Lockset Prep:** **Inactive Door Hardware and Prep:** N/A **Includes:** **Door Finishing Option:** White Acrylic Primer, Multiple Seal Coats Required in Field. **Special Instructions:**	$637.20	1	$637.20

Line #	Description	Unit Price	Qty	Ext. Price
700-1	**Comment/Room:** 009A **Frame Size:** 35.5" X 82" **Flush Door:** 1 @ 1.375" x 34" x 80" Interior | PG | Poplar **Layout:** D0001 **Swing:** RH **Core Material:** Solid LSL Core **Face Material:** .125" Fiberex **Edgebanding:** 1.25" Edgeband (.875" Flat / .375" Tongue) **Fitting Prep:** Downsize and Bevel | Prefit in Jamb | 0.125" Prehang Reveal | 0.125" Prehang Reveal **Includes:** **Hanging Option:** Ship Jambs Knocked Down **Jamb:** .75" x 4.5625" PG Poplar Flat Jamb | Solid Wood | DS-102 Stop (Tacked in Loose) NO RELIEF CUTS **Weatherstripping:** **Door Bottom:** **Sill:** **Hinge Side Casing:** **Non-Hinge Side Casing:** **Mull Pocket:** **Exterior Mull Covers:** N/A **Interior Mull Covers:** N/A **Hardware:** Machine Only | 5" x 5"Hinges | Stanley FBB191 | Ball Bearing | Square Corner | Qty (3) Total **Machining:** Machined per template | Standard Hinge Layout **Lockset Prep:** **Inactive Door Hardware and Prep:** N/A **Includes:** **Door Finishing Option:** White Acrylic Primer, Multiple Seal Coats Required in Field. **Jamb Finishing Option:** White Acrylic Primer, Multiple Seal Coats Required in Field. **Special Instructions:**	$869.40	1	$869.40

Line #	Description	Unit Price	Qty	Ext. Price
800-1	**Comment/Room:** 009B **Frame Size:** 49.5" X 82" **Flush Door:** 2 @ 1.375" x 24" x 80" Interior | PG | Poplar **Layout:** D0001 **Swing:** Double Door Both Active **Core Material:** Solid LSL Core **Face Material:** .125" Fiberex **Edgebanding:** 1.25" Edgeband (.875" Flat / .375" Tongue) **Fitting Prep:** Downsize and Bevel | Prefit in Jamb | 0.125" Prehang Reveal | 0.125" Prehang Reveal **Includes:** **Hanging Option:** Ship Jambs Knocked Down **Jamb:** .75" x 4.5625" PG Poplar Flat Jamb | Solid Wood | DS-102 Stop (Tacked in Loose) NO RELIEF CUTS **Weatherstripping:** **Door Bottom:** **Sill:** **Hinge Side Casing:** **Non-Hinge Side Casing:** **Mull Pocket:** **Exterior Mull Covers:** N/A **Interior Mull Covers:** N/A **Hardware:** Machine Only | 5" x 5"Hinges | Stanley FBB191 | Ball Bearing | Square Corner | Qty (8) Total **Machining:** Machined per template | Standard Hinge Layout **Lockset Prep:** **Inactive Door Hardware and Prep:** N/A (NO INACTIVE DOOR HARDWARE CONFIGURED) **Includes:** **Door Finishing Option:** White Acrylic Primer, Multiple Seal Coats Required in Field. **Jamb Finishing Option:** White Acrylic Primer, Multiple Seal Coats Required in Field. **Special Instructions:**	$1,404.00	1	$1,404.00

Line #	Description		Unit Price	Qty	Ext. Price
900-1	**Comment/Room:** 009C **Frame Size:** 49.5" X 82" **Flush Door:** 2 @ 1.375" x 24" x 80" Interior | PG | Poplar **Layout:** D0001 **Swing:** Double Door Both Active **Core Material:** Solid LSL Core **Face Material:** .125" Fiberex **Edgebanding:** 1.25" Edgeband (.875" Flat / .375" Tongue) **Fitting Prep:** Downsize and Bevel | Prefit in Jamb | 0.125" Prehang Reveal | 0.125" Prehang Reveal **Includes:** **Hanging Option:** Ship Jambs Knocked Down **Jamb:** .75" x 4.5625" PG Poplar Flat Jamb | Solid Wood | DS-102 Stop (Tacked in Loose) NO RELIEF CUTS **Weatherstripping:** **Door Bottom:** **Sill:**	**Hinge Side Casing:** **Non-Hinge Side Casing:** **Mull Pocket:** **Exterior Mull Covers:** N/A **Interior Mull Covers:** N/A **Hardware:** Machine Only | 5" x 5"Hinges | Stanley FBB191 | Ball Bearing | Square Corner | Qty (8) Total **Machining:** Machined per template | Standard Hinge Layout **Lockset Prep:** **Inactive Door Hardware and Prep:** N/A (NO INACTIVE DOOR HARDWARE CONFIGURED) **Includes:** **Door Finishing Option:** White Acrylic Primer, Multiple Seal Coats Required in Field. **Jamb Finishing Option:** White Acrylic Primer, Multiple Seal Coats Required in Field. **Special Instructions:**	$1,404.00	1	$1,404.00

Line #	Description		Unit Price	Qty	Ext. Price
1000-1	**Comment/Room:** 010A **Frame Size:** 35.5" X 82" **Flush Door:** 1 @ 1.375" x 34" x 80" Interior | PG | Poplar **Layout:** D0001 **Swing:** RH **Core Material:** Solid LSL Core **Face Material:** .125" Fiberex **Edgebanding:** 1.25" Edgeband (.875" Flat / .375" Tongue) **Fitting Prep:** Downsize and Bevel | Prefit in Jamb | 0.125" Prehang Reveal | 0.125" Prehang Reveal **Includes:** **Hanging Option:** Ship Jambs Knocked Down **Jamb:** .75" x 4.5625" PG Poplar Flat Jamb | Solid Wood | DS-102 Stop (Tacked in Loose) NO RELIEF CUTS **Weatherstripping:** **Door Bottom:** **Sill:**	**Hinge Side Casing:** **Non-Hinge Side Casing:** **Mull Pocket:** **Exterior Mull Covers:** N/A **Interior Mull Covers:** N/A **Hardware:** Machine Only | 5" x 5"Hinges | Stanley FBB191 | Ball Bearing | Square Corner | Qty (3) Total **Machining:** Machined per template | Standard Hinge Layout **Lockset Prep:** **Inactive Door Hardware and Prep:** N/A **Includes:** **Door Finishing Option:** White Acrylic Primer, Multiple Seal Coats Required in Field. **Jamb Finishing Option:** White Acrylic Primer, Multiple Seal Coats Required in Field. **Special Instructions:**	$869.40	1	$869.40

Line #	Description	Unit Price	Qty	Ext. Price
1100-1	**Comment/Room:** 011A **Frame Size:** 35.5" X 82" **Flush Door:** 1 @ 1.375" x 34" x 80" Interior | PG | Poplar **Layout:** D0001 **Swing:** LH **Core Material:** Solid LSL Core **Face Material:** .125" Fiberex **Edgebanding:** 1.25" Edgeband (.875" Flat / .375" Tongue) **Fitting Prep:** Downsize and Bevel | Prefit in Jamb | 0.125" Prehang Reveal | 0.125" Prehang Reveal **Includes:** **Hanging Option:** Ship Jambs Knocked Down **Jamb:** .75" x 4.5625" PG Poplar Flat Jamb | Solid Wood | DS-102 Stop (Tacked in Loose) NO RELIEF CUTS **Weatherstripping:** **Door Bottom:** **Sill:** **Hinge Side Casing:** **Non-Hinge Side Casing:** **Mull Pocket:** **Exterior Mull Covers:** N/A **Interior Mull Covers:** N/A **Hardware:** Machine Only | 5" x 5"Hinges | Stanley FBB191 | Ball Bearing | Square Corner | Qty (3) Total **Machining:** Machined per template | Standard Hinge Layout **Lockset Prep:** **Inactive Door Hardware and Prep:** N/A **Includes:** **Door Finishing Option:** White Acrylic Primer, Multiple Seal Coats Required in Field. **Jamb Finishing Option:** White Acrylic Primer, Multiple Seal Coats Required in Field. **Special Instructions:**	$869.40	1	$869.40

Line #	Description	Unit Price	Qty	Ext. Price
1200-1	**Comment/Room:** 011B **Flush Door:** 1 @ 1.375" x 30" x 80" Interior | PG | Poplar **Layout:** D0001 **Swing:** Door Only **Core Material:** Solid LSL Core **Face Material:** .125" Fiberex **Edgebanding:** 1.25" Edgeband (.875" Flat / .375" Tongue) **Fitting Prep:** Full and Square **Includes:** **Hardware:** **Machining:** **Lockset Prep:** **Inactive Door Hardware and Prep:** N/A **Includes:** **Door Finishing Option:** White Acrylic Primer, Multiple Seal Coats Required in Field. **Special Instructions:**	$554.85	2	$1,109.70

Line #	Description	Unit Price	Qty	Ext. Price
1300-1	**Comment/Room:** 012A **Frame Size:** 35.5" X 82" **Flush Door:** 1 @ 1.375" x 34" x 80" Interior | PG | Poplar **Layout:** D0001 **Swing:** RH **Core Material:** Solid LSL Core **Face Material:** .125" Fiberex **Edgebanding:** 1.25" Edgeband (.875" Flat / .375" Tongue) **Fitting Prep:** Downsize and Bevel | Prefit in Jamb | 0.125" Prehang Reveal | 0.125" Prehang Reveal **Includes:** **Hanging Option:** Ship Jambs Knocked Down **Jamb:** .75" x 4.5625" PG Poplar Flat Jamb | Solid Wood | DS-102 Stop (Tacked in Loose) NO RELIEF CUTS **Weatherstripping:** **Door Bottom:** **Sill:** **Hinge Side Casing:** **Non-Hinge Side Casing:** **Mull Pocket:** **Exterior Mull Covers:** N/A **Interior Mull Covers:** N/A **Hardware:** Machine Only | 5" x 5"Hinges | Stanley FBB191 | Ball Bearing | Square Corner | Qty (3) Total **Machining:** Machined per template | Standard Hinge Layout **Lockset Prep:** **Inactive Door Hardware and Prep:** N/A **Includes:** **Door Finishing Option:** White Acrylic Primer, Multiple Seal Coats Required in Field. **Jamb Finishing Option:** White Acrylic Primer, Multiple Seal Coats Required in Field. **Special Instructions:**	$869.40	1	$869.40

Line #	Description		Unit Price	Qty	Ext. Price
1400-1	**Comment/Room:** 012B **Flush Door:** 1 @ 1.375" x 30" x 80" Interior | PG | Poplar **Layout:** D0001 **Swing:** Door Only **Core Material:** Solid LSL Core **Face Material:** .125" Fiberex **Edgebanding:** 1.25" Edgeband (.875" Flat / .375" Tongue) **Fitting Prep:** Full and Square **Includes:**	**Hardware:** **Machining:** **Lockset Prep:** **Inactive Door Hardware and Prep:** N/A **Includes:** **Door Finishing Option:** White Acrylic Primer, Multiple Seal Coats Required in Field. **Special Instructions:**	$554.85	2	$1,109.70

Line #	Description		Unit Price	Qty	Ext. Price
1500-1	**Comment/Room:** 700B **Frame Size:** 25.5" X 82" **Flush Door:** 1 @ 1.75" x 24" x 80" Interior | SG | White Oak (Plain Sawn) **Layout:** D0001 **Swing:** LH **Core Material:** Solid LSL Core **Face Material:** .0625" Veneer **Grain Direction:**Vertical **Edgebanding:** 1.25" Edgeband (.875" Flat / .375" Tongue) **Fitting Prep:** Downsize and Bevel | Prefit in Jamb | 0.125" Prehang Reveal | 0.125" Prehang Reveal **Includes:** **Hanging Option:** Ship Jambs Knocked Down **Jamb:** .75" x 4.5625" SG White Oak (Plain Sawn) Flat Jamb | Solid Wood | DS-102 Stop (Tacked in Loose) NO RELIEF CUTS **Weatherstripping:** **Door Bottom:**	**Sill:** **Hinge Side Casing:** **Non-Hinge Side Casing:** **Mull Pocket:** **Exterior Mull Covers:** N/A **Interior Mull Covers:** N/A **Hardware:** Machine Only | 5" x 5"Hinges | Stanley SBB 191 | Ball Bearing | Square Corner | Qty (3) Total **Machining:** Machined per template | Standard Hinge Layout **Lockset Prep:** **Inactive Door Hardware and Prep:** N/A **Includes:** **Door Finishing Option:** Finish Sanded-additional preparation is necessary prior to applying finish **Jamb Finishing Option:** Finish Sanded-additional preparation is necessary prior to applying finish **Special Instructions:**	$1,918.35	1	$1,918.35

Line #	Description		Unit Price	Qty	Ext. Price
1600-1	**Comment/Room:** 701A **Frame Size:** 35.5" X 82" **Flush Door:** 1 @ 1.75" x 34" x 80" Interior | SG | White Oak (Plain Sawn) **Layout:** D0001 **Swing:** RH **Core Material:** Solid LSL Core **Face Material:** .0625" Veneer **Grain Direction:**Vertical **Edgebanding:** 1.25" Edgeband (.875" Flat / .375" Tongue) **Fitting Prep:** Downsize and Bevel | Prefit in Jamb | 0.125" Prehang Reveal | 0.125" Prehang Reveal **Includes:** **Hanging Option:** Ship Jambs Knocked Down **Jamb:** .75" x 4.5625" SG White Oak (Plain Sawn) Flat Jamb | Solid Wood | DS-102 Stop (Tacked in Loose) NO RELIEF CUTS **Weatherstripping:** **Door Bottom:**	**Sill:** **Hinge Side Casing:** **Non-Hinge Side Casing:** **Mull Pocket:** **Exterior Mull Covers:** N/A **Interior Mull Covers:** N/A **Hardware:** Machine Only | 5" x 5"Hinges | Stanley SBB 191 | Ball Bearing | Square Corner | Qty (3) Total **Machining:** Machined per template | Standard Hinge Layout **Lockset Prep:** **Inactive Door Hardware and Prep:** N/A **Includes:** **Door Finishing Option:** Finish Sanded-additional preparation is necessary prior to applying finish **Jamb Finishing Option:** Finish Sanded-additional preparation is necessary prior to applying finish **Special Instructions:**	$2,199.15	1	$2,199.15

Line #	Description		Unit Price	Qty	Ext. Price
1700-1	**Comment/Room:** 801C **Frame Size:** 38" X 82.25" **Flush Door:** 1 @ 1.75" x 36" x 80" Interior Fire Door | SG | White Oak (Plain Sawn) | 60 Minute Fire Rated Category B **Layout:** D0001 **Swing:** RH **Core Material:** Solid MDF Core **Face Material:** .0625" Veneer **Grain Direction:**Vertical **Edgebanding:** 1.5" Edgebanding **Fitting Prep:** Downsize and Bevel | Prefit in Jamb | 0.125" Prehang Reveal | 0.125" Prehang Reveal **Includes:** **Hanging Option:** Ship Jambs Knocked Down **Jamb:** 1.00" x 4.6875" SG White Oak (Plain Sawn) Flat Jamb | Solid Wood | DS-102 Stop (Tacked in Loose) NO RELIEF CUTS **Weatherstripping:** Black Fire Rated Weatherstripping **Door Bottom:** Cap Sweep (fire rated)	**Sill:** **Hinge Side Casing:** **Non-Hinge Side Casing:** **Mull Pocket:** **Exterior Mull Covers:** N/A **Interior Mull Covers:** N/A **Hardware:** Machine Only | 5" x 5"Hinges | SBB 191 | Ball Bearing | Square Corner | Qty (3) Total **Machining:** Machined per template | Standard Hinge Layout **Lockset Prep:** Single Bore | 0.625" Face Bore | 2.375" Backset | 1" Edge Mortise | 36" from Bottom of Door to Center of Bore | Full Lip Strike Prep **Inactive Door Hardware and Prep:** N/A **Includes:** **Door Finishing Option:** Finish Sanded-additional preparation is necessary prior to applying finish **Jamb Finishing Option:** Finish Sanded-additional preparation is necessary prior to applying finish **Special Instructions:**	$5,640.30	1	$5,640.30

Lead Time: Within 11 weeks *from finalized order*.
Lead Time is production lead time. Please add 5 business days for delivery.
Delivery: Included to tailgate of truck for distribution by others.
Changes: Minimum of $500 or 5% (whichever is higher)
charge for changes after order is processed.
A quote from Upstate Door does not constitute acceptance of an order.

Subtotal:	$24,614.55
Tax:	$1,999.93
Total:	$26,614.48

**All errors are subject to correction; estimate is valid for 7 days.
**Customer is responsible for verifying all information is correct before order is approved.
**All orders are produced in accordance with Upstate's approved paperwork.
**Any changes to specs, door list or delivery address, must be noted on Upstate paperwork prior to sign off.
**Any claims for damaged or missing items must be submitted to Upstate within 5 days of delivery.
**Please see www.upstatedoor.com for complete warranty information.
**Due to the unprecedented volitivity of lumber costs, Upstate door can only hold pricing on quotes for 7 days. If quote goes to order after 7 days, Upstate reserves the right to adjust pricing according to the current market prices for that day.
**Customer agrees to pay for product when complete and current moving/storage fees (after end lead time date) if they decline accepting delivery when done.

Quote Notes:

** Anything not specified, such as casing, locksets, or bores, are not included
** DO indicates "Doors Only" - NO machining, NO Hardware.
** Additional charges may apply upon arrival and inspection of customer supplied components (hinges, glass, etc.) at Upstate's facility. If components or specs are not received by Upstate, lead time will be delayed.
** There will be natural variations in wood color and grain that show when the finish is applied because different pieces of wood accept finish differently. Generally, veneer will finish different than solid lumber stock. This is viewed as part of the natural beauties of wood.
** Standard hinge layout is: 7" from top, 10 1/2" from bottom, middle hinge(s) evenly spaced between top and bottom hinges.
** Exterior units must have an overhang/awning above that extends 1/2 the distance of the entry height. Please see our warranty or ask your customer service representative for more information.
** Units must be finished or sealed within 1 week from delivery of the product. Please see our warranty or ask your customer service representative for more information.
** Upstate will follow the hinge manufacturer's stated and/or measured swag when machining for hinges to maintain proper reveals. This may cause hinges to be proud of jamb/door.
** Upstate Door reserves the right to apply Primed Steel hinges to units if hinges spec'd have yet to arrive to our facility. This is attributed to our vendor having longer lead times than our lead times stated to our customers. Should this occasion arise, back charges from our customer are null and void for the cost to remove the primed hinges and the installation of the proper hinges that are on back order.
** Upstate Door is not liable for any backordered hardware, glass, and/or wood parts that are supplied by another vendor. We reserve the right to ship our products without if it can be installed in the field or hold shipment if needed.
** Glass Note: All tempered glass is shipped with our glass vendors logo.
** In paint grade applications, composite materials may be utilized for wood substitutes at manufacturer discretion.
** At manufacturer's discretion, adjustable sills may be spliced at mull pockets.
** Checks in white oak are considered common characteristic of this species of wood and are not considered defects.
** Groove detail on centers are based on the door opening- the groove(s) closest to edge of door may vary up to ¼" based on door being downsized and beveled.
**Circular hanger marks will be visible on top and bottom edges of all prefinished slabs – this includes clear coat, stain and clear coat, value package, deluxe package and color deluxe package.

** Doors with NO DOWNSIZE OR BEVEL will be exact to spec'd door width, full and square (per door).
** 60 Minute 3-Ply Wood "Plant-On" Construction, Fire Rated Door with FyreWerks Fire Rated Core. Type "B" Construction, Proprietary Core: FX-60. *Franklin Multibond 2015 to be used on entire door adhesion. *NOTE: No FyreEdge/Edgebanding Required for Category "B" Doors*. All fire doors must be installed in accordance with NFP80.

We appreciate the opportunity to provide you with this quote!

Limited One-Year Warranty

Upstate Door Inc. (Upstate) strives to produce superior quality doors that are engineered and designed specifically for each individual customer. Our products are intended to stand the test of time under normal conditions and use with proper handling, installation, finishing and on-going care.

Subject to the terms and conditions contained in paragraphs (I) through (VI) below, Upstate warranties all of our products "for (1) year" from the original date of delivery of the product against: (a) defects in workmanship, (b) defects in materials and (c) door warping. In the event of a covered warranty claim, Upstate will, at our discretion: (a) repair the affected product; (b) replace the affected product in its original state of purchase; or (c) refund the purchase price of the original product. Call or Email https://www.upstatedoor.com/contact_us.cfm our Custom Door Experts to assist you.

The full warranty that includes the detail of the points below is located on our website and can be viewed at:

https://www.upstatedoor.com/index.cfm?Page=Upstate-Door-Warranty

I. LIMITATIONS AND EXCLUSIONS

II. DOOR WARPING

III. VOIDING WARANTY

IV. WARRANTY CLAIMS

V. EXPRESS LIMITATION

VI. DISCLOSURE

UPSTATE DOOR®

FINE DOOR SOLUTIONS... ONE SOURCE

Door Stop Profiles

Scale: FULL

DS-101

DS-102

DS-103

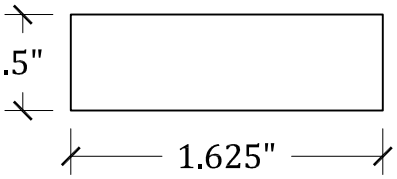

DS-104



DS-105

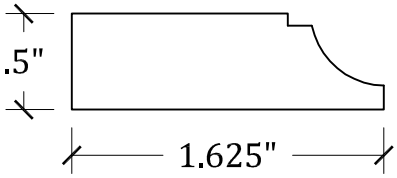

DS-106

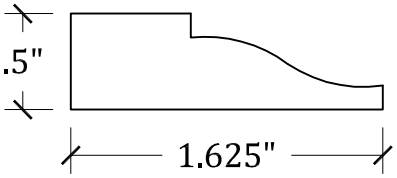

DS-107



DS-108

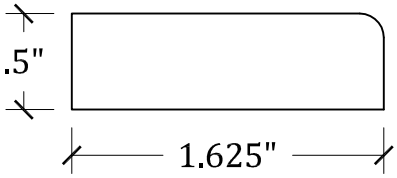

DS-109

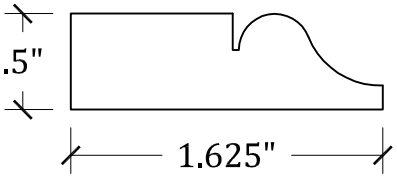

DS-110

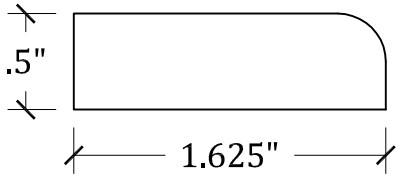

DS-111

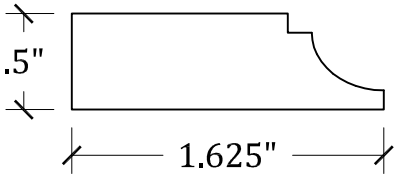
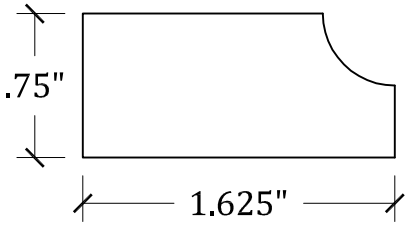
DS-112