North River Stonewall

Quote #: H5KGHDM

A Proposal for Window and Door Products prepared for:
Job Site:
10543

Shipping Address:
JILCO WINDOW CORP
135 Mahopac Ave
Granite Springs, NY 10527-1127

VIC MILANO
JILCO WINDOW CORP
135 MAHOPAC AVE
GRANITE SPRINGS, NY 10527-1127
Phone: (914) 248-6100

Email: vmilano@jilcowindow.com

This report was generated on 6/10/2025 12:17:04 PM using the Marvin Order Management System, version 0004.15.00 (Current). Price in USD. Unit availability and price are subject to change. Dealer terms and conditions may apply.

Project Description:
25 Stonewall Lane, Mamaroneck

Featuring products from:

MARVIN

UNIT SUMMARY

The following is a schedule of the windows and doors for this project. For additional unit details, please see Line Item Quotes.
Additional charges, tax or Terms and Conditions may apply. Detail pricing is per unit.

NUMBER OF LINES: 13 TOTAL UNIT QTY: 30 EXT NET PRICE: USD 119,861.69

LINE	MARK UNIT	PRODUCT LINE	ITEM	NET PRICE	QTY	EXTENDED NET PRICE
1	1	Modern	Casement Crank Out RO 32 1/2" X 68 1/2"	2,231.19	7	15,618.33
2	2	Modern	Casement Picture RO 32 1/8" X 68 1/2"	2,084.94	8	16,679.52
3	1/2/1	Modern	Marvin Assembly RO 94 1/2" X 68 1/2"	6,899.35	4	27,597.40
4	4	Modern	Casement Picture RO 32 1/8" X 56 1/2"	1,769.16	1	1,769.16
5	5	Modern	Marvin Assembly RO 63 1/2" X 68 1/2"	4,637.74	1	4,637.74
6	5 Tempered	Modern	Marvin Assembly RO 63 1/2" X 68 1/2"	4,637.74	1	4,637.74
7	6	Modern	Casement Crank Out RO 32 1/2" X 44 1/2"	1,706.39	1	1,706.39
8	7	Modern	Casement Crank Out RO 21 1/2" X 44 1/2"	1,591.21	1	1,591.21
9	8	Modern	Awning Crank Out RO 32 1/2" X 21 1/2"	1,517.44	1	1,517.44
10	9	Modern	Casement Crank Out RO 32 1/2" X 53 1/2"	1,828.05	1	1,828.05
11	9	Modern	Casement Crank Out RO 32 1/2" X 53 1/2"	1,828.05	2	3,656.10
12	11	Modern	Multi-Slide Door Stacked RO 60 1/2" X 95 3/4" Total RO:	14,295.65	1	14,295.65
13	12	Modern	Multi-Slide Door Stacked RO 145 1/2" X 95 3/4" Total RO:	24,326.96	1	24,326.96

LINE ITEM QUOTES

The following is a schedule of the windows and doors for this project. For additional unit details, please see Line Item Quotes. Additional charges, tax or Terms and Conditions may apply. Detail pricing is per unit.

Line #1 Qty: 7	Mark Unit: 1	Net Price: Ext. Net Price:	 USD	2,231.19 15,618.33

MARVIN



As Viewed From The Exterior

FS 31" X 67 3/4"
RO 32 1/2" X 68 1/2"
Egress Information
Width: 23 7/16" Height: 63 3/64"
Net Clear Opening: 10.27 SqFt
Performance Information
U-Factor: 0.27
Solar Heat Gain Coefficient: 0.19
Visible Light Transmittance: 0.44
Condensation Resistance: 50
CPD Number: MAR-N-446-02628-00001
ENERGY STAR: SC, S

Ebony Exterior
Stone White Interior
Modern Casement Crank Out - Left Hand
Rough Opening 32 1/2" X 68 1/2"
Frame Size 31" X 67 3/4"
Sash
IG - 15/16 in - 1 Lite
Low E3/ERS w/Argon
Black Perimeter Bar
Stone White Folding Handle
Aluminum Screen
Stone White Screen Surround
Bright View Mesh
***Screen/Combo Ship Loose
3 13/32" Jambs
4 1/2" Overall Jamb Depth
Thru Jamb Installation
NOTICE: The recipient is solely responsible for offloading all deliveries from the Marvin truck. Please ensure the appropriate persons and lifting / handling equipment are present and prepared to take delivery and offload the product.
Weight Summary
Weight(s) provided are approximate calculated packaged weight(s).
Single Unit, 108 lbs.
Screen, 5 lbs.
***Note: Safe handling requires proper lifting techniques using adequate personnel and appropriate mechanical assistance, based on weight and dimensions.
*****Note: Unit Availability and Price is Subject to Change**

Line #2 Qty: 8	Mark Unit: 2	Net Price: Ext. Net Price:	 USD	2,084.94 16,679.52

MARVIN



As Viewed From The Exterior

FS 30 5/8" X 67 3/4"

Ebony Exterior
Stone White Interior
Modern Casement Picture
Rough Opening 32 1/8" X 68 1/2"
Frame Size 30 5/8" X 67 3/4"
Sash
IG - 15/16 in - 1 Lite
Low E3/ERS w/Argon
Black Perimeter Bar
3 13/32" Jambs
4 1/2" Overall Jamb Depth
Thru Jamb Installation
NOTICE: The recipient is solely responsible for offloading all deliveries from the Marvin truck. Please ensure the appropriate persons and lifting / handling equipment are present and prepared to take delivery and offload the product.
Weight Summary
Weight(s) provided are approximate calculated packaged weight(s).
Single Unit, 103 lbs.
***Note: Safe handling requires proper lifting techniques using adequate personnel and appropriate mechanical assistance, based on weight and dimensions.

RO 32 1/8" X 68 1/2"
Egress Information
No Egress Information available.
Performance Information
U-Factor: 0.24
Solar Heat Gain Coefficient: 0.22
Visible Light Transmittance: 0.5
Condensation Resistance: 50
CPD Number: MAR-N-448-01286-00001
ENERGY STAR: NC, SC, S

*****Note: Unit Availability and Price is Subject to Change**

Line #3 Qty: 4	Mark Unit: 1/2/1	Net Price: Ext. Net Price:	 USD	6,899.35 27,597.40

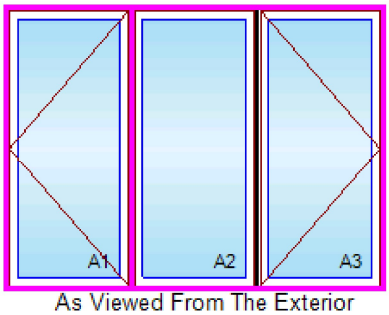

As Viewed From The Exterior

FS 93" X 67 3/4"
RO 94 1/2" X 68 1/2"
Egress Information A1, A3
Width: 23 7/16" Height: 63 3/64"
Net Clear Opening: 10.27 SqFt
Egress Information A2
No Egress Information available.
Performance Information A1, A3
U-Factor: 0.27
Solar Heat Gain Coefficient: 0.19
Visible Light Transmittance: 0.44
Condensation Resistance: 50
CPD Number: MAR-N-446-02628-00001
ENERGY STAR: SC, S
Performance Information A2
U-Factor: 0.24
Solar Heat Gain Coefficient: 0.22
Visible Light Transmittance: 0.5
Condensation Resistance: 50
CPD Number: MAR-N-448-01286-00001
ENERGY STAR: NC, SC, S

Ebony Exterior
Stone White Interior
Feature Mismatch: Screen Type
3W1H - Rectangle Assembly
Assembly Rough Opening
94 1/2" X 68 1/2"
Prep for Field Mull Assembly
Mull Kit(s) Included
Sub Assembly 1 - 1W1H
Basic Frame 31" x 67 3/4"
Unit Locations: A1
Sub Assembly 2 - 2W1H
Basic Frame 62" x 67 3/4"
Unit Locations: A2,A3

Unit: A1
Modern Casement Crank Out - Left Hand
Basic Frame 31" X 67 3/4"
Rough Opening 32 1/2" X 68 1/2"
Sash
IG - 15/16 in - 1 Lite
Low E3/ERS w/Argon
Black Perimeter Bar
Stone White Folding Handle
Aluminum Screen
Stone White Screen Surround
Bright View Mesh
***Screen/Combo Ship Loose

Unit: A2
Modern Casement Picture
Basic Frame 31" X 67 3/4"
Rough Opening 32 1/2" X 68 1/2"
Sash
IG - 15/16 in - 1 Lite
Low E3/ERS w/Argon
Black Perimeter Bar

Unit: A3
Modern Casement Crank Out - Right Hand
Basic Frame 31" X 67 3/4"
Rough Opening 32 1/2" X 68 1/2"
Sash
IG - 15/16 in - 1 Lite
Low E3/ERS w/Argon
Black Perimeter Bar
Stone White Folding Handle
Aluminum Screen
Stone White Screen Surround
Bright View Mesh
***Screen/Combo Ship Loose
Mull 1 - Prep for Vertical Standard Mull - 67 3/4" Long
Standard Mull Charge
3 13/32" Jambs
4 1/2" Overall Jamb Depth

Thru Jamb Installation
NOTICE: The recipient is solely responsible for offloading all deliveries from the Marvin truck. Please ensure the appropriate persons and lifting / handling equipment are present and prepared to take delivery and offload the product.
Weight Summary
Weight(s) provided are approximate calculated packaged weight(s).
Screen, 5 lbs.
Screen, 5 lbs.
Sub Assembly 1, 108 lbs.
Sub Assembly 2, 203 lbs.
***Note: Safe handling requires proper lifting techniques using adequate personnel and appropriate mechanical assistance, based on weight and dimensions.
***Note: This configuration is certified to AAMA 450 and meets a minimum structural performance of DP 40. Mull certification ratings may vary from individual unit certification ratings. Reference the mulling chapter of the Marvin ADM for additional information regarding the performance rating of the selected mulls.
*****Note: Unit Availability and Price is Subject to Change**

Line #4 Qty: 1	Mark Unit: 4	Net Price: Ext. Net Price:	 USD	1,769.16 1,769.16

MARVIN



As Viewed From The Exterior

FS 30 5/8" X 55 3/4"
RO 32 1/8" X 56 1/2"
Egress Information
No Egress Information available.
Performance Information
U-Factor: 0.24
Solar Heat Gain Coefficient: 0.22
Visible Light Transmittance: 0.51
Condensation Resistance: 51
CPD Number: MAR-N-448-01299-00001
ENERGY STAR: NC, SC, S

Ebony Exterior
Stone White Interior
Modern Casement Picture
Rough Opening 32 1/8" X 56 1/2"
Frame Size 30 5/8" X 55 3/4"
Sash
IG - 15/16 in - 1 Lite
Low E3/ERS w/Argon
Black Perimeter Bar
3 13/32" Jambs
4 1/2" Overall Jamb Depth
Thru Jamb Installation
NOTICE: The recipient is solely responsible for offloading all deliveries from the Marvin truck. Please ensure the appropriate persons and lifting / handling equipment are present and prepared to take delivery and offload the product.
Weight Summary
Weight(s) provided are approximate calculated packaged weight(s).
Single Unit, 82 lbs.
***Note: Safe handling requires proper lifting techniques using adequate personnel and appropriate mechanical assistance, based on weight and dimensions.
*****Note: Unit Availability and Price is Subject to Change**

Line #5 Qty: 1	Mark Unit: 5	Net Price: Ext. Net Price:	 USD	4,637.74 4,637.74

MARVIN

Ebony Exterior
Stone White Interior
2W1H - Rectangle Assembly
Assembly Rough Opening
63 1/2" X 68 1/2"

Unit: A1
Modern Casement Crank Out - Left Hand
Basic Frame 31" X 67 3/4"

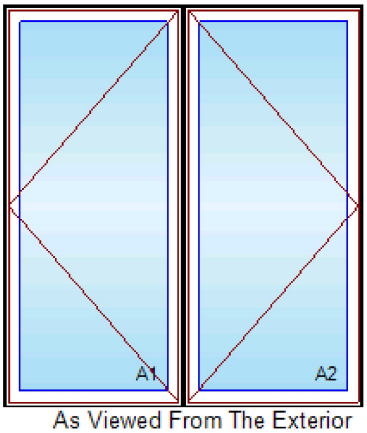

As Viewed From The Exterior

FS 62" X 67 3/4"
RO 63 1/2" X 68 1/2"
Egress Information A1, A2
Width: 23 7/16" Height: 63 3/64"
Net Clear Opening: 10.27 SqFt
Performance Information A1, A2
U-Factor: 0.27
Solar Heat Gain Coefficient: 0.19
Visible Light Transmittance: 0.44
Condensation Resistance: 50
CPD Number: MAR-N-446-02628-00001
ENERGY STAR: SC, S

Rough Opening 32 1/2" X 68 1/2"
Sash
IG - 15/16 in - 1 Lite
Low E3/ERS w/Argon
Black Perimeter Bar
Stone White Folding Handle
Aluminum Screen
Stone White Screen Surround
Bright View Mesh
***Screen/Combo Ship Loose

Unit: A2
Modern Casement Crank Out - Right Hand
Basic Frame 31" X 67 3/4"
Rough Opening 32 1/2" X 68 1/2"
Sash
IG - 15/16 in - 1 Lite
Low E3/ERS w/Argon
Black Perimeter Bar
Stone White Folding Handle
Aluminum Screen
Stone White Screen Surround
Bright View Mesh
***Screen/Combo Ship Loose
Standard Mull Charge
3 13/32" Jambs
4 1/2" Overall Jamb Depth
Thru Jamb Installation
NOTICE: The recipient is solely responsible for offloading all deliveries from the Marvin truck. Please ensure the appropriate persons and lifting / handling equipment are present and prepared to take delivery and offload the product.
Weight Summary
Weight(s) provided are approximate calculated packaged weight(s).
Screen, 5 lbs.
Screen, 5 lbs.
Assembly, 208 lbs.
***Note: Safe handling requires proper lifting techniques using adequate personnel and appropriate mechanical assistance, based on weight and dimensions.
***Note: This configuration is certified to AAMA 450 and meets a minimum structural performance of DP 40. Mull certification ratings may vary from individual unit certification ratings. Reference the mulling chapter of the Marvin ADM for additional information regarding the performance rating of the selected mulls.
*****Note: Unit Availability and Price is Subject to Change**

Line #6 Qty: 1	Mark Unit: 5 Tempered	Net Price: Ext. Net Price:	 USD	4,637.74 4,637.74

MARVIN

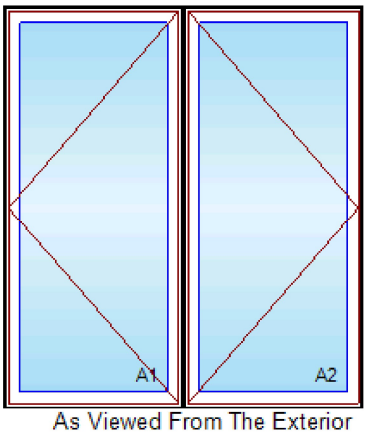

As Viewed From The Exterior

Ebony Exterior
Stone White Interior
2W1H - Rectangle Assembly
Assembly Rough Opening
63 1/2" X 68 1/2"

Unit: A1
Modern Casement Crank Out - Left Hand
Basic Frame 31" X 67 3/4"
Rough Opening 32 1/2" X 68 1/2"
Sash
IG - 15/16 in - 1 Lite
Low E3/ERS w/Argon
Black Perimeter Bar
Stone White Folding Handle
Aluminum Screen
Stone White Screen Surround
Bright View Mesh
***Screen/Combo Ship Loose

Unit: A2

FS 62" X 67 3/4"
RO 63 1/2" X 68 1/2"
Egress Information A1, A2
Width: 23 7/16" Height: 63 3/64"
Net Clear Opening: 10.27 SqFt
Performance Information A1, A2
U-Factor: 0.27
Solar Heat Gain Coefficient: 0.19
Visible Light Transmittance: 0.44
Condensation Resistance: 50
CPD Number: MAR-N-446-02628-00001
ENERGY STAR: SC, S

Modern Casement Crank Out - Right Hand
Basic Frame 31" X 67 3/4"
Rough Opening 32 1/2" X 68 1/2"
Sash
IG - 15/16 in - 1 Lite
Low E3/ERS w/Argon
Black Perimeter Bar
Stone White Folding Handle
Aluminum Screen
Stone White Screen Surround
Bright View Mesh
***Screen/Combo Ship Loose
Standard Mull Charge
3 13/32" Jambs
4 1/2" Overall Jamb Depth
Thru Jamb Installation
NOTICE: The recipient is solely responsible for offloading all deliveries from the Marvin truck. Please ensure the appropriate persons and lifting / handling equipment are present and prepared to take delivery and offload the product.
Weight Summary
Weight(s) provided are approximate calculated packaged weight(s).
Screen, 5 lbs.
Screen, 5 lbs.
Assembly, 208 lbs.
***Note: Safe handling requires proper lifting techniques using adequate personnel and appropriate mechanical assistance, based on weight and dimensions.
***Note: This configuration is certified to AAMA 450 and meets a minimum structural performance of DP 40. Mull certification ratings may vary from individual unit certification ratings. Reference the mulling chapter of the Marvin ADM for additional information regarding the performance rating of the selected mulls.
*****Note: Unit Availability and Price is Subject to Change**

Line #7 Qty: 1	Mark Unit: 6	Net Price: Ext. Net Price:	 USD	1,706.39 1,706.39

MARVIN

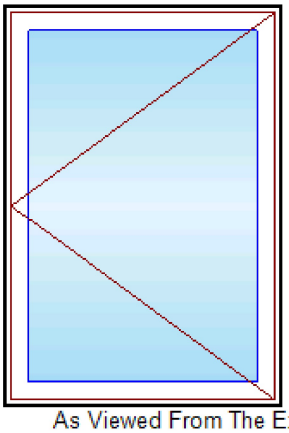

As Viewed From The Exterior

FS 31" X 43 3/4"
RO 32 1/2" X 44 1/2"
Egress Information
Width: 23 7/16" Height: 39 3/64"
Net Clear Opening: 6.36 SqFt
Performance Information
U-Factor: 0.27
Solar Heat Gain Coefficient: 0.19
Visible Light Transmittance: 0.44
Condensation Resistance: 50
CPD Number: MAR-N-446-02641-00001
ENERGY STAR: SC, S

Ebony Exterior
Stone White Interior
Modern Casement Crank Out - Left Hand
Rough Opening 32 1/2" X 44 1/2"
Frame Size 31" X 43 3/4"
Sash
IG - 15/16 in - 1 Lite
Low E3/ERS w/Argon
Black Perimeter Bar
Stone White Folding Handle
Aluminum Screen
Stone White Screen Surround
Bright View Mesh
***Screen/Combo Ship Loose
3 13/32" Jambs
4 1/2" Overall Jamb Depth
Thru Jamb Installation
NOTICE: The recipient is solely responsible for offloading all deliveries from the Marvin truck. Please ensure the appropriate persons and lifting / handling equipment are present and prepared to take delivery and offload the product.
Weight Summary
Weight(s) provided are approximate calculated packaged weight(s).
Single Unit, 75 lbs.
Screen, 4 lbs.
***Note: Safe handling requires proper lifting techniques using adequate personnel and appropriate mechanical assistance, based on weight and dimensions.
*****Note: Unit Availability and Price is Subject to Change**

Line #8 Qty: 1	Mark Unit: 7	Net Price: Ext. Net Price:	 USD	1,591.21 1,591.21

MARVIN



As Viewed From The Exterior

FS 20" X 43 3/4"
RO 21 1/2" X 44 1/2"
Egress Information
Width: 12 7/16" Height: 39 3/64"
Net Clear Opening: 3.37 SqFt
Performance Information
U-Factor: 0.27
Solar Heat Gain Coefficient: 0.19
Visible Light Transmittance: 0.44
Condensation Resistance: 50
CPD Number: MAR-N-446-02641-00001
ENERGY STAR: SC, S

Ebony Exterior
Stone White Interior
Modern Casement Crank Out - Left Hand
Rough Opening 21 1/2" X 44 1/2"
Frame Size 20" X 43 3/4"
Sash
IG - 15/16 in - 1 Lite
Tempered Low E3/ERS w/Argon
Black Perimeter Bar
Stone White Folding Handle
Aluminum Screen
Stone White Screen Surround
Bright View Mesh
***Screen/Combo Ship Loose
3 13/32" Jambs
4 1/2" Overall Jamb Depth
Thru Jamb Installation
NOTICE: The recipient is solely responsible for offloading all deliveries from the Marvin truck. Please ensure the appropriate persons and lifting / handling equipment are present and prepared to take delivery and offload the product.
Weight Summary
Weight(s) provided are approximate calculated packaged weight(s).
Single Unit, 61 lbs.
Screen, 3 lbs.
***Note: Safe handling requires proper lifting techniques using adequate personnel and appropriate mechanical assistance, based on weight and dimensions.
*****Note: Unit Availability and Price is Subject to Change**

Line #9 Qty: 1	Mark Unit: 8	Net Price: Ext. Net Price:	 USD	1,517.44 1,517.44

MARVIN

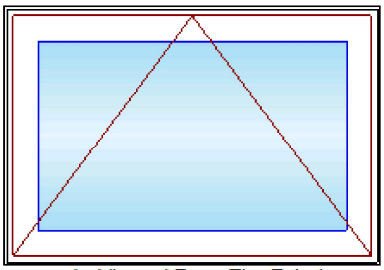

As Viewed From The Exterior

FS 31" X 20 3/4"
RO 32 1/2" X 21 1/2"
Egress Information
No Egress Information available.
Performance Information
U-Factor: 0.27
Solar Heat Gain Coefficient: 0.19
Visible Light Transmittance: 0.44
Condensation Resistance: 47
CPD Number: MAR-N-447-01537-00001
ENERGY STAR: SC, S

Ebony Exterior
Stone White Interior
Modern Awning Crank Out - Roto Operating
Rough Opening 32 1/2" X 21 1/2"
Frame Size 31" X 20 3/4"
Sash
IG - 15/16 in - 1 Lite
Low E3/ERS w/Argon
Black Perimeter Bar
Stone White Folding Handle
Aluminum Screen
Stone White Screen Surround
Bright View Mesh
***Screen/Combo Ship Loose
3 13/32" Jambs
4 1/2" Overall Jamb Depth
Thru Jamb Installation
NOTICE: The recipient is solely responsible for offloading all deliveries from the Marvin truck. Please ensure the appropriate persons and lifting / handling equipment are present and prepared to take delivery and offload the product.
Weight Summary
Weight(s) provided are approximate calculated packaged weight(s).
Single Unit, 52 lbs.
Screen, 3 lbs.
***Note: Safe handling requires proper lifting techniques using adequate personnel and appropriate mechanical assistance, based on weight and dimensions.

*****Note: Unit Availability and Price is Subject to Change**

Line #10 Qty: 1	Mark Unit: 9	Net Price: Ext. Net Price:	 USD	1,828.05 1,828.05

MARVIN

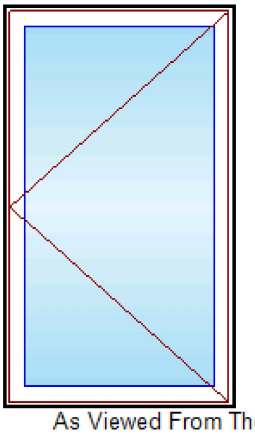

As Viewed From The Exterior

FS 31" X 52 3/4"
RO 32 1/2" X 53 1/2"
Egress Information
Width: 23 7/16" Height: 48 3/64"
Net Clear Opening: 7.82 SqFt
Performance Information
U-Factor: 0.27
Solar Heat Gain Coefficient: 0.19
Visible Light Transmittance: 0.44
Condensation Resistance: 50
CPD Number: MAR-N-446-02641-00001
ENERGY STAR: SC, S

Ebony Exterior
Stone White Interior
Modern Casement Crank Out - Left Hand
Rough Opening 32 1/2" X 53 1/2"
Frame Size 31" X 52 3/4"
Sash
IG - 15/16 in - 1 Lite
Low E3/ERS w/Argon
Black Perimeter Bar
Stone White Folding Handle
Aluminum Screen
Stone White Screen Surround
Bright View Mesh
***Screen/Combo Ship Loose
3 13/32" Jambs
4 1/2" Overall Jamb Depth
Thru Jamb Installation
NOTICE: The recipient is solely responsible for offloading all deliveries from the Marvin truck. Please ensure the appropriate persons and lifting / handling equipment are present and prepared to take delivery and offload the product.
Weight Summary
Weight(s) provided are approximate calculated packaged weight(s).
Single Unit, 84 lbs.
Screen, 4 lbs.
***Note: Safe handling requires proper lifting techniques using adequate personnel and appropriate mechanical assistance, based on weight and dimensions.
*****Note: Unit Availability and Price is Subject to Change**

Line #11 Qty: 2	Mark Unit: 9	Net Price: Ext. Net Price:	 USD	1,828.05 3,656.10

MARVIN

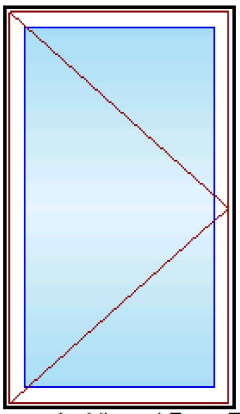

As Viewed From The Exterior

FS 31" X 52 3/4"
RO 32 1/2" X 53 1/2"
Egress Information
Width: 23 7/16" Height: 48 3/64"
Net Clear Opening: 7.82 SqFt

Ebony Exterior
Stone White Interior
Modern Casement Crank Out - Right Hand
Rough Opening 32 1/2" X 53 1/2"
Frame Size 31" X 52 3/4"
Sash
IG - 15/16 in - 1 Lite
Low E3/ERS w/Argon
Black Perimeter Bar
Stone White Folding Handle
Aluminum Screen
Stone White Screen Surround
Bright View Mesh
***Screen/Combo Ship Loose
3 13/32" Jambs
4 1/2" Overall Jamb Depth
Thru Jamb Installation
NOTICE: The recipient is solely responsible for offloading all deliveries from the Marvin truck. Please ensure the appropriate persons and lifting / handling equipment are present and prepared to take delivery and offload the product.
Weight Summary
Weight(s) provided are approximate calculated packaged weight(s).
Single Unit, 84 lbs.
Screen, 4 lbs.
***Note: Safe handling requires proper lifting techniques using adequate personnel and appropriate mechanical assistance, based on weight and

Performance Information
U-Factor: 0.27
Solar Heat Gain Coefficient: 0.19
Visible Light Transmittance: 0.44
Condensation Resistance: 50
CPD Number: MAR-N-446-02641-00001
ENERGY STAR: SC, S

dimensions.
*****Note: Unit Availability and Price is Subject to Change**

Line #12 Qty: 1	Mark Unit: 11	Net Price: Ext. Net Price:	 USD	14,295.65 14,295.65

MARVIN

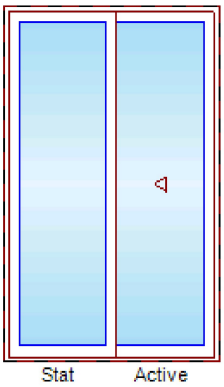

As Viewed From The Exterior

FS 59" X 95"
RO 60 1/2" X 95 3/4"
Egress Information
Width: 25 13/16" Height: 91 11/16"
Net Clear Opening: 16.44 SqFt
Performance Information
U-Factor: 0.25
Solar Heat Gain Coefficient: 0.21
Visible Light Transmittance: 0.48
Condensation Resistance: 48
CPD Number: MAR-N-445-01064-00001
ENERGY STAR: NC, SC, S

Ebony Exterior
Stone White Interior
Modern Multi-Slide Door Stacked - OX
Rough Opening 60 1/2" X 95 3/4"
Frame Size 59" X 95"
Knocked Down
***Panels Ship Separate
Glass Add For All Sash/Panels
Panel 1
IG - 15/16 in - 1 Lite
Tempered Low E3/ERS w/Argon
Black Perimeter Bar
Panel 2
IG - 15/16 in - 1 Lite
Tempered Low E3/ERS w/Argon
Black Perimeter Bar
Matte Black Exterior Flush Handle on Primary Panel Non-Keyed
Matte Black Interior Flush Handle with Latch on Primary Panel
Non Keyed
Interior Retractable Screen SE4
Screen Frame OM 64 17/64" X 96 59/64"
Rough Opening and jamb depth adjustments will be required. Please review the Modern Multi Slide Door Site Prep Guide.
Stone White Screen Surround
Charcoal Mesh
Uni-Directional
Black Handle Pull
Ebony Aluminum Screen Sill
***Screen/Combo Ship Loose
Ebony Performance Sill
Black Weather Strip
6 9/16" Jambs
7 41/64" Overall Jamb Depth
Thru Jamb Installation
NOTICE: The recipient is solely responsible for offloading all deliveries from the Marvin truck. Please ensure the appropriate persons and lifting / handling equipment are present and prepared to take delivery and offload the product.
Weight Summary
Weight(s) provided are approximate calculated packaged weight(s).
Frame and Accessories, 144 lbs.
Panel 1, 117 lbs.
Panel 2, 121 lbs.
***Note: Safe handling requires proper lifting techniques using adequate personnel and appropriate mechanical assistance, based on weight and dimensions.
***Note: This door is Knocked Down (KD) and will therefore require assembly.
*****Note: Unit Availability and Price is Subject to Change**

Line #13 Qty: 1	Mark Unit: 12	Net Price: Ext. Net Price:	 USD	24,326.96 24,326.96

MARVIN

Ebony Exterior
Stone White Interior
Modern Multi-Slide Door Stacked - OXXX
Rough Opening 145 1/2" X 95 3/4"
Frame Size 144" X 95"

As Viewed From The Exterior

FS 144" X 95"
RO 145 1/2" X 95 3/4"
Egress Information
Width: 102 29/64" Height: 91 11/16"
Net Clear Opening: 65.23 SqFt
Performance Information
Product Performance Information is currently unavailable in the OMS for this product and glazing option. To request product performance information not in the OMS, contact your Marvin representative or submit an Assistance Request.

Knocked Down
***Panels Ship Separate
Glass Add For All Sash/Panels
Panel 1
IG - 15/16 in - 1 Lite
Tempered Low E3/ERS w/Argon
Black Perimeter Bar
Panel 2
IG - 15/16 in - 1 Lite
Tempered Low E3/ERS w/Argon
Black Perimeter Bar
Panel 3
IG - 15/16 in - 1 Lite
Tempered Low E3/ERS w/Argon
Black Perimeter Bar
Panel 4
IG - 15/16 in - 1 Lite
Tempered Low E3/ERS w/Argon
Black Perimeter Bar
Matte Black Exterior Flush Handle on Primary Panel Non-Keyed
Matte Black Interior Flush Handle with Latch on Primary Panel
Non Keyed
Interior Retractable Screen SE4
Screen Frame OM 149 17/64" X 96 59/64"
Rough Opening and jamb depth adjustments will be required. Please review the Modern Multi Slide Door Site Prep Guide.
Stone White Screen Surround
Charcoal Mesh
Uni-Directional
Black Handle Pull
Ebony Aluminum Screen Sill
***Screen/Combo Ship Loose
Ebony Performance Sill
Black Weather Strip
12 19/32" Jambs
13 43/64" Overall Jamb Depth
Thru Jamb Installation
NOTICE: The recipient is solely responsible for offloading all deliveries from the Marvin truck. Please ensure the appropriate persons and lifting / handling equipment are present and prepared to take delivery and offload the product.
Weight Summary
Weight(s) provided are approximate calculated packaged weight(s).
Frame and Accessories, 330 lbs.
Panel 1, 139 lbs.
Panel 2, 141 lbs.
Panel 3, 141 lbs.
Panel 4, 143 lbs.
***Note: Safe handling requires proper lifting techniques using adequate personnel and appropriate mechanical assistance, based on weight and dimensions.
***Note: This door is Knocked Down (KD) and will therefore require assembly.
*****Note: Unit Availability and Price is Subject to Change**

Project Subtotal Net Price: USD	119,861.69
8.375% Sales Tax: USD	10,038.42
Project Total Net Price: USD	129,900.11

PRODUCT AND PERFORMANCE INFORMATION

NFRC Ratings:

NFRC energy ratings may vary depending on the exact configuration of glass thickness used on the unit. NFRC energy values and ratings may change over time due to ongoing product changes, updated test results or requirements. NFRC values and ratings are finalized on the date of manufacture.

The National Fenestration Rating Council (NFRC) has developed and operates a uniform rating system for the energy performance of fenestration products, including windows, doors and skylights. For additional information regarding this rating system, see www.nfrc.org.

Code (residential, building or energy) Compliance:

Determining the suitability and compliance with state, provincial, local, or other applicable building codes or standards, including energy codes, is the responsibility of the buyer, user, architect, contractor, installer, and/or other construction professional.

2021 IECC Climate Zone Map:

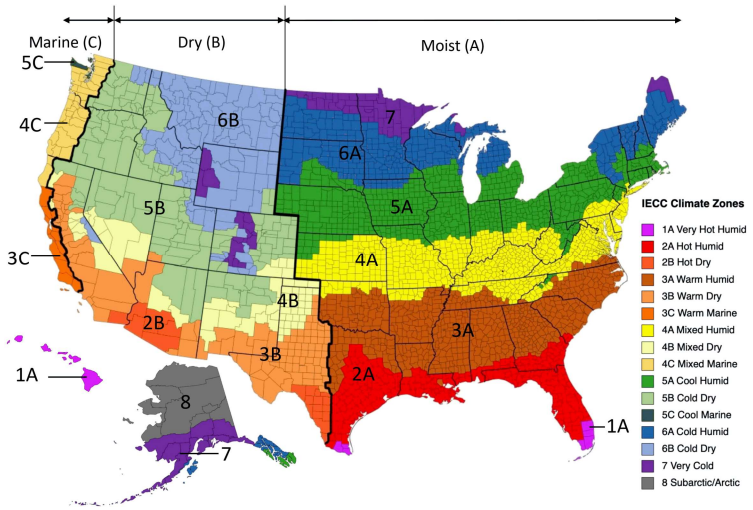

ENERGY STAR Version 7 Climate Zone Map:

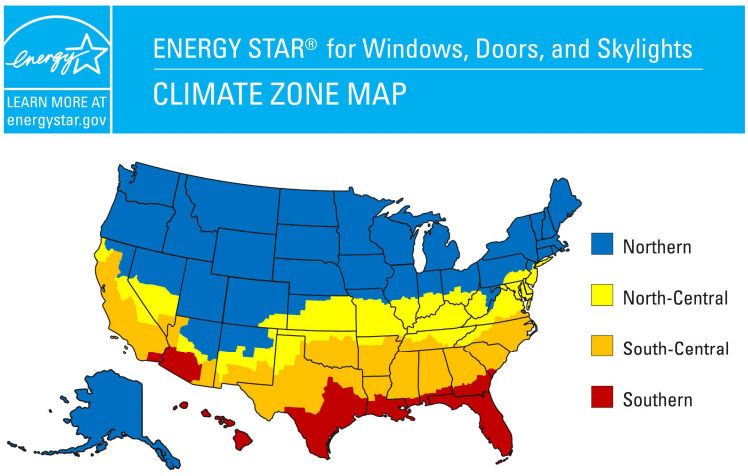

Contact your Marvin inside service representative for Sliding Door Automatic Control installation pricing.

Sliding Door Automatic Control may not be suitable for corner posts, 90 degree corner units or concrete block applications. The motorized solution requires a minimum of 12 inches between studs for mounting. Please refer to Marvin's site prep guide for additional details.