Montana Contracting - Ines MacAdam
25 Stonewall Lane

5-23-25

Quote #: BXWY574

A Proposal for Window and Door Products prepared for:
End Customer:
Montana Contracting - Ines MacAdam
173 US-9W
Congers, NY 10920

Contact Name: Ines
Phone: (845) 398-1778
Email: Ines@montanacontracting.com

Job Site:
Ines
25 Stonewall Lane
Mamaroneck, NY 10543

Contact Name: Ines
Phone: (845) 398-1778
Email: ines@montanacontracting.com

Shipping Address:
AWD MARVIN DESIGN GALLERY
5 Odell Plz Ste 141
Yonkers, NY 10701-1406

AUTHENTIC WINDOW DESIGN
A LAVITT GROUP COMPANY

FRANK KELLY
AWD MARVIN DESIGN GALLERY
5 ODELL PLZ STE 141
YONKERS, NY 10701-1406
Phone: (914) 644-4800 Ext.103
Fax: (914) 644-4843
CELL: 914-943-8567
Email: fkelly@authenticwindow.com

Project Description:
25 Stonewall Lane
Mamaroneck, NY 10543

Featuring products from:

MARVIN

UNIT SUMMARY

The following is a schedule of the windows and doors for this project. For additional unit details, please see Line Item Quotes.
Additional charges, tax or Terms and Conditions may apply. Detail pricing is per unit.

LINE ITEM QUOTES

The following is a schedule of the windows and doors for this project. For additional unit details, please see Line Item Quotes. Additional charges, tax or Terms and Conditions may apply. Detail pricing is per unit.

Line #1 Qty: 3	Mark Unit: Basement- Type 9	Net Price: Ext. Net Price:	 USD	1,968.81 5,906.43

quote only

MARVIN

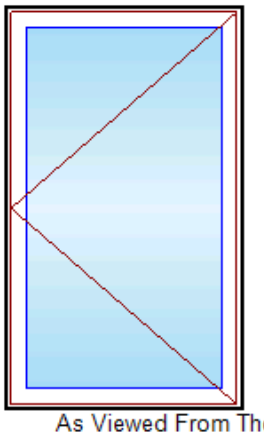

As Viewed From The Exterior

Entered As: RO
FS 31" X 52 3/4"
RO 32 1/2" X 53 1/2"
Egress Information
Width: 23 7/16" Height: 48 3/64"
Net Clear Opening: 7.82 SqFt
Performance Information
U-Factor: 0.28
Solar Heat Gain Coefficient: 0.29
Visible Light Transmittance: 0.49
Condensation Resistance: 50
CPD Number: MAR-N-446-02639-00001
Performance Grade
Licensee #1152
AAMA/WDMA/CSA/101/I.S.2/A440-11
CW-PG50 813X2743 mm (32X108 in)
Water Resistance: 12.12 psf
CW-PG50 DP +50/-50
FL29656

Ebony Exterior
Stone White Interior
Modern Casement Crank Out - Left Hand
Rough Opening 32 1/2" X 53 1/2"
Frame Size 31" X 52 3/4"
Sash
IG - 15/16 in - 1 Lite
Low E2/ERS w/Argon
Black Perimeter Bar
Satin Nickel Folding Handle
Aluminum Screen
Stone White Screen Surround
Bright View Mesh
***Screen/Combo Ship Loose
3 13/32" Jambs
4 1/2" Overall Jamb Depth
Thru Jamb Installation
NOTICE: The recipient is solely responsible for offloading all deliveries from the Marvin truck. Please ensure the appropriate persons and lifting / handling equipment are present and prepared to take delivery and offload the product.
Weight Summary
Weight(s) provided are approximate calculated packaged weight(s).
Single Unit, 84 lbs.
Screen, 4 lbs.
***Note: Safe handling requires proper lifting techniques using adequate personnel and appropriate mechanical assistance, based on weight and dimensions.
*****Note: Unit Availability and Price is Subject to Change**

Initials required

Seller: _____

Buyer: _____

Line #2 Qty: 1	Mark Unit: Basemnt- Type 8	Net Price: Ext. Net Price:	 USD	1,649.30 1,649.30

MARVIN

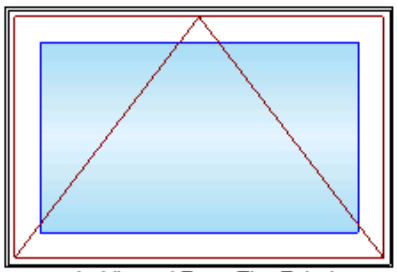

As Viewed From The Exterior

Entered As: RO
FS 31" X 20 3/4"
RO 32 1/2" X 21 1/2"
Egress Information
No Egress Information available.
Performance Information
U-Factor: 0.28
Solar Heat Gain Coefficient: 0.29
Visible Light Transmittance: 0.49
Condensation Resistance: 47
CPD Number: MAR-N-447-01535-00001
Performance Grade
Licensee #1153
AAMA/WDMA/CSA/101/I.S.2/A440-11
CW-PG50 1626X2438 mm (64X96 in)
Water Resistance: 12.12 psf
CW-PG50 DP +50/-50
FL29659

Ebony Exterior
Stone White Interior
Modern Awning Crank Out - Roto Operating
Rough Opening 32 1/2" X 21 1/2"
Frame Size 31" X 20 3/4"
Sash
IG - 15/16 in - 1 Lite
Low E2/ERS w/Argon
Black Perimeter Bar
Satin Nickel Folding Handle
Aluminum Screen
Stone White Screen Surround
Bright View Mesh
***Screen/Combo Ship Loose
3 13/32" Jambs
4 1/2" Overall Jamb Depth
Thru Jamb Installation
NOTICE: The recipient is solely responsible for offloading all deliveries from the Marvin truck. Please ensure the appropriate persons and lifting / handling equipment are present and prepared to take delivery and offload the product.
Weight Summary
Weight(s) provided are approximate calculated packaged weight(s).
Single Unit, 52 lbs.
Screen, 3 lbs.
***Note: Safe handling requires proper lifting techniques using adequate personnel and appropriate mechanical assistance, based on weight and dimensions.
*****Note: Unit Availability and Price is Subject to Change**

quote only

Initials required

Seller: _____

Buyer: _____

Line #3 Qty: 4	Mark Unit: Front Elevation-Type 1/2/1	Net Price: Ext. Net Price:	 USD	7,327.52 29,310.08

MARVIN

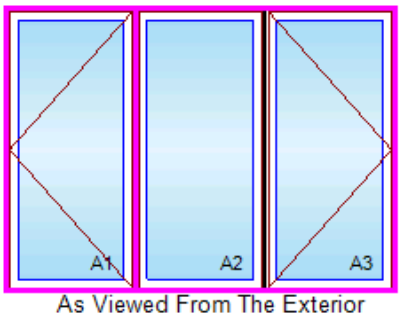

As Viewed From The Exterior

Entered As: Size by Units x RO
FS 93" X 67 3/4"
RO 94 1/2" X 68 1/2"
Egress Information A1, A3
Width: 23 7/16" Height: 63 3/64"
Net Clear Opening: 10.27 SqFt
Egress Information A2
No Egress Information available.
Performance Information A1, A3
U-Factor: 0.28

Ebony Exterior
Stone White Interior
3W1H - Rectangle Assembly
Assembly Rough Opening
94 1/2" X 68 1/2"
Assembly Frame Size
93" X 67 3/4"
Prep for Field Mull Assembly
Mull Kit(s) Included
Sub Assembly 1 - 1W1H
Basic Frame 31" x 67 3/4"
Unit Locations: A1
Sub Assembly 2 - 2W1H
Basic Frame 62" x 67 3/4"
Unit Locations: A2,A3

Unit: A1
Modern Casement Crank Out - Left Hand
Basic Frame 31" X 67 3/4"
Rough Opening 32 1/2" X 68 1/2"
Sash
IG - 15/16 in - 1 Lite
Low E2/ERS w/Argon
Black Perimeter Bar
Satin Nickel Folding Handle

Solar Heat Gain Coefficient: 0.28
Visible Light Transmittance: 0.48
Condensation Resistance: 49
CPD Number: MAR-N-446-02626-00001
Performance Information A2
U-Factor: 0.25
Solar Heat Gain Coefficient: 0.32
Visible Light Transmittance: 0.56
Condensation Resistance: 49
CPD Number: MAR-N-448-01284-00001
ENERGY STAR: NC
Performance Grade A1, A3
Licensee #1152
AAMA/WDMA/CSA/101/I.S.2/A440-11
CW-PG50 813X2743 mm (32X108 in)
Water Resistance: 12.12 psf
CW-PG50 DP +50/-50
FL29656
Performance Grade A2
Licensee #1152
AAMA/WDMA/CSA/101/I.S.2/A440-11
CW-PG50 1880X2743 mm (74X108 in)
Water Resistance: 12.12 psf
CW-PG50 DP +50/-50
FL29656

Aluminum Screen
Stone White Screen Surround
Bright View Mesh
***Screen/Combo Ship Loose

Unit: A2
Modern Casement Picture
Basic Frame 31" X 67 3/4"
Rough Opening 32 1/2" X 68 1/2"
Sash
IG - 15/16 in - 1 Lite
Low E2/ERS w/Argon
Black Perimeter Bar

Unit: A3
Modern Casement Crank Out - Right Hand
Basic Frame 31" X 67 3/4"
Rough Opening 32 1/2" X 68 1/2"
Sash
IG - 15/16 in - 1 Lite
Low E2/ERS w/Argon
Black Perimeter Bar
Satin Nickel Folding Handle
Aluminum Screen
Stone White Screen Surround
Bright View Mesh
***Screen/Combo Ship Loose
Mull 1 - Prep for Vertical Standard Mull - 67 3/4" Long
Standard Mull Charge
3 13/32" Jambs
4 1/2" Overall Jamb Depth
Thru Jamb Installation
NOTICE: The recipient is solely responsible for offloading all deliveries from the Marvin truck. Please ensure the appropriate persons and lifting / handling equipment are present and prepared to take delivery and offload the product.
Weight Summary
Weight(s) provided are approximate calculated packaged weight(s).
Screen, 5 lbs.
Screen, 5 lbs.
Sub Assembly 1, 108 lbs.
Sub Assembly 2, 203 lbs.
***Note: Safe handling requires proper lifting techniques using adequate personnel and appropriate mechanical assistance, based on weight and dimensions.
***Note: This configuration is certified to AAMA 450 and meets a minimum structural performance of DP 40. Mull certification ratings may vary from individual unit certification ratings. Reference the mulling chapter of the Marvin ADM for additional information regarding the performance rating of the selected mulls.
*****Note: Unit Availability and Price is Subject to Change**

quote only

Initials required

Seller: _____

Buyer: _____

Line #4 Qty: 1	Mark Unit: Foyer -Type 2 Temp	Net Price: Ext. Net Price:	 USD	2,393.23 2,393.23

MARVIN

Ebony Exterior
Stone White Interior
Modern Casement Picture
Rough Opening 32 1/2" X 68 1/2"



As Viewed From The Exterior

Entered As: RO
FS 31" X 67 3/4"
RO 32 1/2" X 68 1/2"
Egress Information
No Egress Information available.
Performance Information
U-Factor: 0.25
Solar Heat Gain Coefficient: 0.33
Visible Light Transmittance: 0.56
Condensation Resistance: 50
CPD Number: MAR-N-448-01297-00001
ENERGY STAR: NC
Performance Grade
Licensee #1152
AAMA/WDMA/CSA/101/I.S.2/A440-11
CW-PG50 1880X2743 mm (74X108 in)
Water Resistance: 12.12 psf
CW-PG50 DP +50/-50
FL29656

Frame Size 31" X 67 3/4"
Sash
IG - 15/16 in - 1 Lite
Tempered Low E2/ERS w/Argon
Black Perimeter Bar
3 13/32" Jambs
4 1/2" Overall Jamb Depth
Thru Jamb Installation
NOTICE: The recipient is solely responsible for offloading all deliveries from the Marvin truck. Please ensure the appropriate persons and lifting / handling equipment are present and prepared to take delivery and offload the product.
Weight Summary
Weight(s) provided are approximate calculated packaged weight(s).
Single Unit, 95 lbs.
***Note: Safe handling requires proper lifting techniques using adequate personnel and appropriate mechanical assistance, based on weight and dimensions.
*****Note: Unit Availability and Price is Subject to Change**

Initials required

Seller: _____

Buyer: _____

quote only

Line #5 Qty: 1	Mark Unit: Foyer -Type 2	Net Price: Ext. Net Price:	 USD	2,055.33 2,055.33

MARVIN



As Viewed From The Exterior

Entered As: RO
FS 31" X 67 3/4"
RO 32 1/2" X 68 1/2"
Egress Information
No Egress Information available.
Performance Information

Ebony Exterior
Stone White Interior
Modern Casement Picture
Rough Opening 32 1/2" X 68 1/2"
Frame Size 31" X 67 3/4"
Sash
IG - 15/16 in - 1 Lite
Low E2 w/Argon
Black Perimeter Bar
3 13/32" Jambs
4 1/2" Overall Jamb Depth
Thru Jamb Installation
NOTICE: The recipient is solely responsible for offloading all deliveries from the Marvin truck. Please ensure the appropriate persons and lifting / handling equipment are present and prepared to take delivery and offload the product.
Weight Summary
Weight(s) provided are approximate calculated packaged weight(s).
Single Unit, 104 lbs.
***Note: Safe handling requires proper lifting techniques using adequate personnel and appropriate mechanical assistance, based on weight and dimensions.
*****Note: Unit Availability and Price is Subject to Change**

Initials required

U-Factor: 0.29
Solar Heat Gain Coefficient: 0.33
Visible Light Transmittance: 0.57
Condensation Resistance: 61
CPD Number: MAR-N-448-01276-00001
Performance Grade
Licensee #1152
AAMA/WDMA/CSA/101/I.S.2/A440-11
CW-PG50 1880X2743 mm (74X108 in)
Water Resistance: 12.12 psf
CW-PG50 DP +50/-50
FL29656

Seller: _____

Buyer: _____

Line #6 Qty: 5	Mark Unit: 1st Floor- Type 1	Net Price: Ext. Net Price:	 USD	2,389.14 11,945.70

MARVIN



As Viewed From The Exterior

Entered As: RO
FS 31" X 67 3/4"
RO 32 1/2" X 68 1/2"
Egress Information
Width: 23 7/16" Height: 63 3/64"
Net Clear Opening: 10.27 SqFt
Performance Information
U-Factor: 0.28
Solar Heat Gain Coefficient: 0.28
Visible Light Transmittance: 0.48
Condensation Resistance: 49
CPD Number: MAR-N-446-02626-00001
Performance Grade
Licensee #1152
AAMA/WDMA/CSA/101/I.S.2/A440-11
CW-PG50 813X2743 mm (32X108 in)
Water Resistance: 12.12 psf
CW-PG50 DP +50/-50
FL29656

Ebony Exterior
Stone White Interior
Modern Casement Crank Out - Left Hand
Rough Opening 32 1/2" X 68 1/2"
Frame Size 31" X 67 3/4"
Sash
IG - 15/16 in - 1 Lite
Low E2/ERS w/Argon
Black Perimeter Bar
Satin Nickel Folding Handle
Aluminum Screen
Stone White Screen Surround
Bright View Mesh
***Screen/Combo Ship Loose
3 13/32" Jambs
4 1/2" Overall Jamb Depth
Thru Jamb Installation
NOTICE: The recipient is solely responsible for offloading all deliveries from the Marvin truck. Please ensure the appropriate persons and lifting / handling equipment are present and prepared to take delivery and offload the product.
Weight Summary
Weight(s) provided are approximate calculated packaged weight(s).
Single Unit, 108 lbs.
Screen, 5 lbs.
***Note: Safe handling requires proper lifting techniques using adequate personnel and appropriate mechanical assistance, based on weight and dimensions.
*****Note: Unit Availability and Price is Subject to Change**

Quote only

Initials required

Seller: _____

Buyer: _____

Line #7 Qty: 1	Mark Unit: Guest Bath- Type 7	Net Price: Ext. Net Price:	 USD	1,731.74 1,731.74

MARVIN

Ebony Exterior
Stone White Interior
Modern Casement Crank Out - Left Hand
Rough Opening 21 1/2" X 44 1/2"



As Viewed From The Exterior

Entered As: RO
FS 20" X 43 3/4"
RO 21 1/2" X 44 1/2"
Egress Information
Width: 12 7/16" Height: 39 3/64"
Net Clear Opening: 3.37 SqFt
Performance Information
U-Factor: 0.28
Solar Heat Gain Coefficient: 0.29
Visible Light Transmittance: 0.49
Condensation Resistance: 50
CPD Number: MAR-N-446-02639-00001
Performance Grade
Licensee #1152
AAMA/WDMA/CSA/101/I.S.2/A440-11
CW-PG50 813X2743 mm (32X108 in)
Water Resistance: 12.12 psf
CW-PG50 DP +50/-50
FL29656

Frame Size 20" X 43 3/4"
Sash
IG - 15/16 in - 1 Lite
Tempered Low E2/ERS w/Argon
Black Perimeter Bar
Satin Nickel Folding Handle
Aluminum Screen
Stone White Screen Surround
Bright View Mesh
***Screen/Combo Ship Loose
3 13/32" Jambs
4 1/2" Overall Jamb Depth
Thru Jamb Installation
NOTICE: The recipient is solely responsible for offloading all deliveries from the Marvin truck. Please ensure the appropriate persons and lifting / handling equipment are present and prepared to take delivery and offload the product.
Weight Summary
Weight(s) provided are approximate calculated packaged weight(s).
Single Unit, 61 lbs.
Screen, 3 lbs.
***Note: Safe handling requires proper lifting techniques using adequate personnel and appropriate mechanical assistance, based on weight and dimensions.
*****Note: Unit Availability and Price is Subject to Change**

quote only

Initials required

Seller: _____

Buyer: _____

Line #8 Qty: 1	Mark Unit: Living Room Slider	Net Price: Ext. Net Price:	 USD	20,937.54 20,937.54

MARVIN

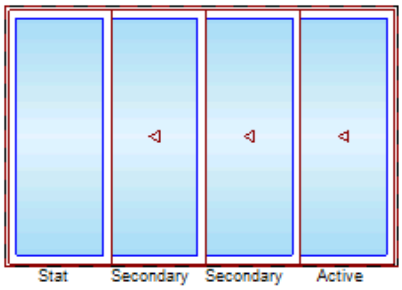

As Viewed From The Exterior

Entered As: RO
FS 144" X 95"
RO 145 1/2" X 95 3/4"
Egress Information
Width: 102 29/64" Height: 91 11/16"
Net Clear Opening: 65.23 SqFt
Performance Information
U-Factor: 0.25
Solar Heat Gain Coefficient: 0.31

Ebony Exterior
Stone White Interior
Modern Multi-Slide Door Stacked - OXXX
Rough Opening 145 1/2" X 95 3/4"
Frame Size 144" X 95"
Knocked Down
***Panels Ship Separate
Glass Add For All Sash/Panels
Panel 1
IG - 15/16 in - 1 Lite
Tempered Low E2/ERS w/Argon
Black Perimeter Bar
Panel 2
IG - 15/16 in - 1 Lite
Tempered Low E2/ERS w/Argon
Black Perimeter Bar
Panel 3
IG - 15/16 in - 1 Lite
Tempered Low E2/ERS w/Argon
Black Perimeter Bar
Panel 4
IG - 15/16 in - 1 Lite
Tempered Low E2/ERS w/Argon
Black Perimeter Bar
Mixed Handle Set Color

Visible Light Transmittance: 0.54
Condensation Resistance: 47
CPD Number: MAR-N-445-01062-00001
ENERGY STAR: NC
Performance Grade
Licensee #1151
101/I.S.2/A440-08
LC-PG45 7161X3092 mm (281.94X121.75 in)
Water Resistance: 6.06 psf
LC-PG45 DP +45/-45
FL28429

Matte Black Exterior Flush Handle on Primary Panel Keyed
Satin Nickel Interior Flush Handle with Latch on Primary Panel
Keyed
Keyed Alike - Keyed Alike Group 1
***Screen/Combo Ship Loose
Ebony Performance Sill
Black Weather Strip
12 19/32" Jambs
13 43/64" Overall Jamb Depth
Thru Jamb Installation
NOTICE: The recipient is solely responsible for offloading all deliveries from the Marvin truck. Please ensure the appropriate persons and lifting / handling equipment are present and prepared to take delivery and offload the product.
Weight Summary
Weight(s) provided are approximate calculated packaged weight(s).
Frame and Accessories, 330 lbs.
Panel 1, 139 lbs.
Panel 2, 141 lbs.
Panel 3, 141 lbs.
Panel 4, 143 lbs.
***Note: Safe handling requires proper lifting techniques using adequate personnel and appropriate mechanical assistance, based on weight and dimensions.
***Note: This door is Knocked Down (KD) and will therefore require assembly.
*****Note: Unit Availability and Price is Subject to Change**

quote only

Initials required

Seller: _____

Buyer: _____

Line #9 Qty: 1	Mark Unit: Bed #3-- Type 1	Net Price: Ext. Net Price:	 USD	2,389.14 2,389.14

MARVIN



As Viewed From The Exterior

Entered As: RO
FS 31" X 67 3/4"
RO 32 1/2" X 68 1/2"
Egress Information
Width: 23 7/16" Height: 63 3/64"
Net Clear Opening: 10.27 SqFt
Performance Information
U-Factor: 0.28
Solar Heat Gain Coefficient: 0.28
Visible Light Transmittance: 0.48

Ebony Exterior
Stone White Interior
Modern Casement Crank Out - Left Hand
Rough Opening 32 1/2" X 68 1/2"
Frame Size 31" X 67 3/4"
Sash
IG - 15/16 in - 1 Lite
Low E2/ERS w/Argon
Black Perimeter Bar
Satin Nickel Folding Handle
Aluminum Screen
Stone White Screen Surround
Bright View Mesh
***Screen/Combo Ship Loose
3 13/32" Jambs
4 1/2" Overall Jamb Depth
Thru Jamb Installation
NOTICE: The recipient is solely responsible for offloading all deliveries from the Marvin truck. Please ensure the appropriate persons and lifting / handling equipment are present and prepared to take delivery and offload the product.
Weight Summary
Weight(s) provided are approximate calculated packaged weight(s).
Single Unit, 108 lbs.
Screen, 5 lbs.
***Note: Safe handling requires proper lifting techniques using adequate personnel and appropriate mechanical assistance, based on weight and dimensions.
*****Note: Unit Availability and Price is Subject to Change**

Condensation Resistance: 49
CPD Number: MAR-N-446-02626-00001
Performance Grade
Licensee #1152
AAMA/WDMA/CSA/101/I.S.2/A440-11
CW-PG50 813X2743 mm (32X108 in)
Water Resistance: 12.12 psf
CW-PG50 DP +50/-50
FL29656

Initials required

Seller: _____

Buyer: _____

Line #10 Qty: 1	Mark Unit: Master bed- Type 1 temp	Net Price: Ext. Net Price:	 USD	2,602.37 2,602.37

MARVIN

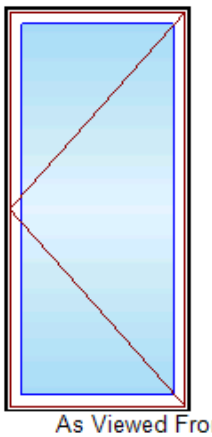

As Viewed From The Exterior

Entered As: RO
FS 31" X 67 3/4"
RO 32 1/2" X 68 1/2"
Egress Information
Width: 23 7/16" Height: 63 3/64"
Net Clear Opening: 10.27 SqFt
Performance Information
U-Factor: 0.28
Solar Heat Gain Coefficient: 0.29
Visible Light Transmittance: 0.49
Condensation Resistance: 50
CPD Number: MAR-N-446-02639-00001
Performance Grade
Licensee #1152
AAMA/WDMA/CSA/101/I.S.2/A440-11
CW-PG50 813X2743 mm (32X108 in)
Water Resistance: 12.12 psf
CW-PG50 DP +50/-50
FL29656

Ebony Exterior
Stone White Interior
Modern Casement Crank Out - Left Hand
Rough Opening 32 1/2" X 68 1/2"
Frame Size 31" X 67 3/4"
Sash
IG - 15/16 in - 1 Lite
Tempered Low E2/ERS w/Argon
Black Perimeter Bar
Satin Nickel Folding Handle
Aluminum Screen
Stone White Screen Surround
Bright View Mesh
***Screen/Combo Ship Loose
3 13/32" Jambs
4 1/2" Overall Jamb Depth
Thru Jamb Installation
NOTICE: The recipient is solely responsible for offloading all deliveries from the Marvin truck. Please ensure the appropriate persons and lifting / handling equipment are present and prepared to take delivery and offload the product.
Weight Summary
Weight(s) provided are approximate calculated packaged weight(s).
Single Unit, 99 lbs.
Screen, 5 lbs.
***Note: Safe handling requires proper lifting techniques using adequate personnel and appropriate mechanical assistance, based on weight and dimensions.
*****Note: Unit Availability and Price is Subject to Change**

note only

Initials required

Seller: _____

Buyer: _____

Line #11 Qty: 5	Mark Unit: 2nd Floor-Type 2	Net Price: Ext. Net Price:	 USD	1,748.09 8,740.45

MARVIN

Ebony Exterior
Stone White Interior
Modern Casement Picture
Rough Opening 32 1/2" X 56 1/2"
Frame Size 31" X 55 3/4"
Sash
IG - 15/16 in - 1 Lite

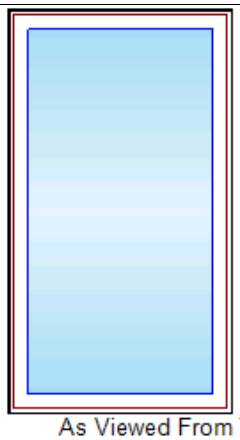

As Viewed From The Exterior

Entered As: RO
FS 31" X 55 3/4"
RO 32 1/2" X 56 1/2"
Egress Information
No Egress Information available.
Performance Information
U-Factor: 0.29
Solar Heat Gain Coefficient: 0.33
Visible Light Transmittance: 0.58
Condensation Resistance: 62
CPD Number: MAR-N-448-01289-00001
Performance Grade
Licensee #1152
AAMA/WDMA/CSA/101/I.S.2/A440-11
CW-PG50 1880X2743 mm (74X108 in)
Water Resistance: 12.12 psf
CW-PG50 DP +50/-50
FL29656

Low E2 w/Argon
Black Perimeter Bar
3 13/32" Jambs
4 1/2" Overall Jamb Depth
Thru Jamb Installation
NOTICE: The recipient is solely responsible for offloading all deliveries from the Marvin truck. Please ensure the appropriate persons and lifting / handling equipment are present and prepared to take delivery and offload the product.
Weight Summary
Weight(s) provided are approximate calculated packaged weight(s).
Single Unit, 83 lbs.
***Note: Safe handling requires proper lifting techniques using adequate personnel and appropriate mechanical assistance, based on weight and dimensions.
*****Note: Unit Availability and Price is Subject to Change**

Initials required

Seller: _____

Buyer: _____

quote only

Line #12 Qty: 1	Mark Unit: Master-Type 2 Temp	Net Price: Ext. Net Price:	 USD	2,009.69 2,009.69

MARVIN

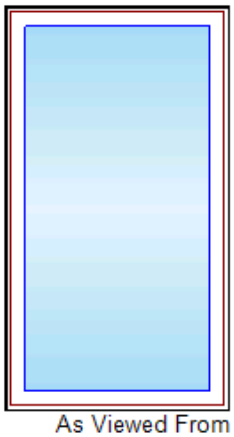

As Viewed From The Exterior

Entered As: RO
FS 31" X 55 3/4"
RO 32 1/2" X 56 1/2"
Egress Information
No Egress Information available.
Performance Information
U-Factor: 0.29

Ebony Exterior
Stone White Interior
Modern Casement Picture
Rough Opening 32 1/2" X 56 1/2"
Frame Size 31" X 55 3/4"
Sash
IG - 15/16 in - 1 Lite
Tempered Low E2 w/Argon
Black Perimeter Bar
3 13/32" Jambs
4 1/2" Overall Jamb Depth
Thru Jamb Installation
NOTICE: The recipient is solely responsible for offloading all deliveries from the Marvin truck. Please ensure the appropriate persons and lifting / handling equipment are present and prepared to take delivery and offload the product.
Weight Summary
Weight(s) provided are approximate calculated packaged weight(s).
Single Unit, 83 lbs.
***Note: Safe handling requires proper lifting techniques using adequate personnel and appropriate mechanical assistance, based on weight and dimensions.
*****Note: Unit Availability and Price is Subject to Change**

Initials required

Seller: _____

Solar Heat Gain Coefficient: 0.33
Visible Light Transmittance: 0.58
Condensation Resistance: 62
CPD Number: MAR-N-448-01289-00001
Performance Grade
Licensee #1152
AAMA/WDMA/CSA/101/I.S.2/A440-11
CW-PG50 1880X2743 mm (74X108 in)
Water Resistance: 12.12 psf
CW-PG50 DP +50/-50
FL29656

Buyer: _____

Line #13 Qty: 2	Mark Unit: 2nd Floor- Type 3	Net Price: Ext. Net Price:	 USD	2,051.24 4,102.48

MARVIN

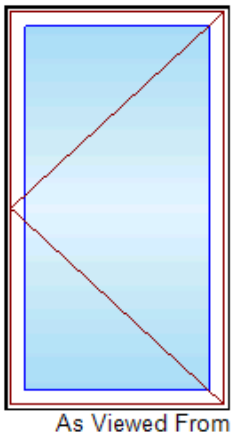

As Viewed From The Exterior

Entered As: RO
FS 31" X 55 3/4"
RO 32 1/2" X 56 1/2"
Egress Information
Width: 23 7/16" Height: 51 3/64"
Net Clear Opening: 8.31 SqFt
Performance Information
U-Factor: 0.28
Solar Heat Gain Coefficient: 0.29
Visible Light Transmittance: 0.49
Condensation Resistance: 50
CPD Number: MAR-N-446-02639-00001
Performance Grade
Licensee #1152
AAMA/WDMA/CSA/101/I.S.2/A440-11
CW-PG50 813X2743 mm (32X108 in)
Water Resistance: 12.12 psf
CW-PG50 DP +50/-50
FL29656

Ebony Exterior
Stone White Interior
Modern Casement Crank Out - Left Hand
Rough Opening 32 1/2" X 56 1/2"
Frame Size 31" X 55 3/4"
Sash
IG - 15/16 in - 1 Lite
Low E2/ERS w/Argon
Black Perimeter Bar
Satin Nickel Folding Handle
Aluminum Screen
Stone White Screen Surround
Bright View Mesh
***Screen/Combo Ship Loose
3 13/32" Jambs
4 1/2" Overall Jamb Depth
Thru Jamb Installation
NOTICE: The recipient is solely responsible for offloading all deliveries from the Marvin truck. Please ensure the appropriate persons and lifting / handling equipment are present and prepared to take delivery and offload the product.
Weight Summary
Weight(s) provided are approximate calculated packaged weight(s).
Single Unit, 87 lbs.
Screen, 4 lbs.
***Note: Safe handling requires proper lifting techniques using adequate personnel and appropriate mechanical assistance, based on weight and dimensions.
*****Note: Unit Availability and Price is Subject to Change**

ote only

Initials required

Seller: _____

Buyer: _____

Line #14 Qty: 1	Mark Unit: Bath #2 Tub- Type 3 temp	Net Price: Ext. Net Price:	 USD	2,226.32 2,226.32

MARVIN

Ebony Exterior
Stone White Interior
Modern Casement Crank Out - Left Hand
Rough Opening 32 1/2" X 56 1/2"
Frame Size 31" X 55 3/4"

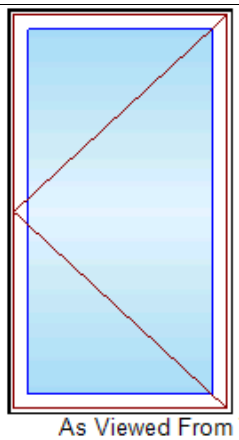

As Viewed From The Exterior

Entered As: RO
FS 31" X 55 3/4"
RO 32 1/2" X 56 1/2"
Egress Information
Width: 23 7/16" Height: 51 3/64"
Net Clear Opening: 8.31 SqFt
Performance Information
U-Factor: 0.28
Solar Heat Gain Coefficient: 0.29
Visible Light Transmittance: 0.49
Condensation Resistance: 50
CPD Number: MAR-N-446-02639-00001
Performance Grade
Licensee #1152
AAMA/WDMA/CSA/101/I.S.2/A440-11
CW-PG50 813X2743 mm (32X108 in)
Water Resistance: 12.12 psf
CW-PG50 DP +50/-50
FL29656

Sash
IG - 15/16 in - 1 Lite
Tempered Low E2/ERS w/Argon
Black Perimeter Bar
Satin Nickel Folding Handle
Aluminum Screen
Stone White Screen Surround
Bright View Mesh
***Screen/Combo Ship Loose
3 13/32" Jambs
4 1/2" Overall Jamb Depth
Thru Jamb Installation
NOTICE: The recipient is solely responsible for offloading all deliveries from the Marvin truck. Please ensure the appropriate persons and lifting / handling equipment are present and prepared to take delivery and offload the product.
Weight Summary
Weight(s) provided are approximate calculated packaged weight(s).
Single Unit, 87 lbs.
Screen, 4 lbs.
***Note: Safe handling requires proper lifting techniques using adequate personnel and appropriate mechanical assistance, based on weight and dimensions.
*****Note: Unit Availability and Price is Subject to Change**

quote only

Initials required

Seller: _____

Buyer: _____

Line #15 Qty: 1	Mark Unit: Office- Type 4	Net Price: Ext. Net Price:	 USD	2,055.33 2,055.33

MARVIN



As Viewed From The Exterior

Entered As: RO
FS 31" X 67 3/4"
RO 32 1/2" X 68 1/2"
Egress Information
No Egress Information available.
Performance Information

Ebony Exterior
Stone White Interior
Modern Casement Picture
Rough Opening 32 1/2" X 68 1/2"
Frame Size 31" X 67 3/4"
Sash
IG - 15/16 in - 1 Lite
Low E2 w/Argon
Black Perimeter Bar
3 13/32" Jambs
4 1/2" Overall Jamb Depth
Thru Jamb Installation
NOTICE: The recipient is solely responsible for offloading all deliveries from the Marvin truck. Please ensure the appropriate persons and lifting / handling equipment are present and prepared to take delivery and offload the product.
Weight Summary
Weight(s) provided are approximate calculated packaged weight(s).
Single Unit, 104 lbs.
***Note: Safe handling requires proper lifting techniques using adequate personnel and appropriate mechanical assistance, based on weight and dimensions.
*****Note: Unit Availability and Price is Subject to Change**

Initials required

U-Factor: 0.29
Solar Heat Gain Coefficient: 0.33
Visible Light Transmittance: 0.57
Condensation Resistance: 61
CPD Number: MAR-N-448-01276-00001
Performance Grade
Licensee #1152
AAMA/WDMA/CSA/101/I.S.2/A440-11
CW-PG50 1880X2743 mm (74X108 in)
Water Resistance: 12.12 psf
CW-PG50 DP +50/-50
FL29656

Seller: _____

Buyer: _____

Line #16 Qty: 1	Mark Unit: Bedroom #2-Type 5	Net Price: Ext. Net Price:	 USD	4,962.90 4,962.90

MARVIN

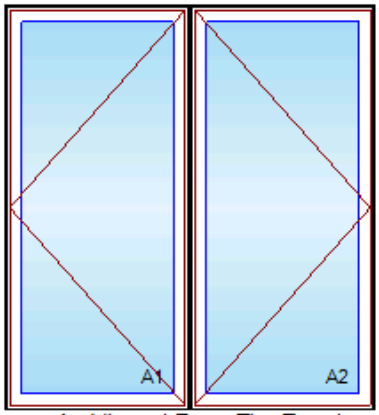

As Viewed From The Exterior

Entered As: Size by Units
FS 62" X 67 3/4"
RO 63 1/2" X 68 1/2"
Egress Information A1, A2
Width: 23 7/16" Height: 63 3/64"
Net Clear Opening: 10.27 SqFt
Performance Information A1, A2
U-Factor: 0.28
Solar Heat Gain Coefficient: 0.28
Visible Light Transmittance: 0.48
Condensation Resistance: 49
CPD Number: MAR-N-446-02626-00001
Performance Grade A1, A2
Licensee #1152
AAMA/WDMA/CSA/101/I.S.2/A440-11
CW-PG50 813X2743 mm (32X108 in)
Water Resistance: 12.12 psf
CW-PG50 DP +50/-50
FL29656

Ebony Exterior
Stone White Interior
2W1H - Rectangle Assembly
Assembly Rough Opening
63 1/2" X 68 1/2"

Quote only

Unit: A1
Modern Casement Crank Out - Left Hand
Basic Frame 31" X 67 3/4"
Rough Opening 32 1/2" X 68 1/2"
Sash
IG - 15/16 in - 1 Lite
Low E2/ERS w/Argon
Black Perimeter Bar
Satin Nickel Folding Handle
Aluminum Screen
Stone White Screen Surround
Bright View Mesh
***Screen/Combo Ship Loose

Unit: A2
Modern Casement Crank Out - Right Hand
Basic Frame 31" X 67 3/4"
Rough Opening 32 1/2" X 68 1/2"
Sash
IG - 15/16 in - 1 Lite
Low E2/ERS w/Argon
Black Perimeter Bar
Satin Nickel Folding Handle
Aluminum Screen
Stone White Screen Surround
Bright View Mesh
***Screen/Combo Ship Loose
Standard Mull Charge
3 13/32" Jambs
4 1/2" Overall Jamb Depth
Thru Jamb Installation
NOTICE: The recipient is solely responsible for offloading all deliveries from the Marvin truck. Please ensure the appropriate persons and lifting / handling equipment are present and prepared to take delivery and offload the product.
Weight Summary
Weight(s) provided are approximate calculated packaged weight(s).
Screen, 5 lbs.
Screen, 5 lbs.
Assembly, 208 lbs.
***Note: Safe handling requires proper lifting techniques using adequate personnel and appropriate mechanical assistance, based on weight and dimensions.
***Note: This configuration is certified to AAMA 450 and meets a minimum

structural performance of DP 40. Mull certification ratings may vary from individual unit certification ratings. Reference the mulling chapter of the Marvin ADM for additional information regarding the performance rating of the selected mulls.

*****Note: Unit Availability and Price is Subject to Change**

Initials required

Seller: _____

Buyer: _____

Line #17 Qty: 1	Mark Unit: Master Bath -Type 5A	Net Price: Ext. Net Price:	 USD	4,637.26 4,637.26

MARVIN

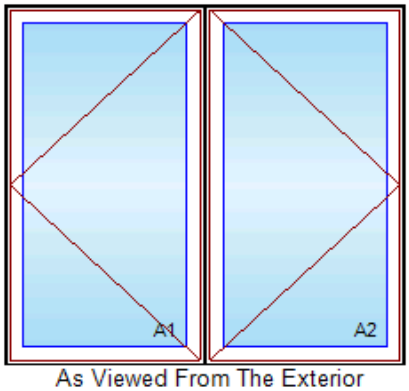

As Viewed From The Exterior

Entered As: Size by Units x RO
FS 62" X 55 3/4"
RO 63 1/2" X 56 1/2"
Egress Information A1, A2
Width: 23 7/16" Height: 51 3/64"
Net Clear Opening: 8.31 SqFt
Performance Information A1, A2
U-Factor: 0.28
Solar Heat Gain Coefficient: 0.29
Visible Light Transmittance: 0.49
Condensation Resistance: 50
CPD Number: MAR-N-446-02639-00001
Performance Grade A1, A2
Licensee #1152
AAMA/WDMA/CSA/101/I.S.2/A440-11
CW-PG50 813X2743 mm (32X108 in)
Water Resistance: 12.12 psf
CW-PG50 DP +50/-50
FL29656

Ebony Exterior
Stone White Interior
2W1H - Rectangle Assembly
Assembly Rough Opening
63 1/2" X 56 1/2"
Assembly Frame Size
62" X 55 3/4"

Quote only

Unit: A1
Modern Casement Crank Out - Left Hand
Basic Frame 31" X 55 3/4"
Rough Opening 32 1/2" X 56 1/2"
Sash
IG - 15/16 in - 1 Lite
Tempered Low E2/ERS w/Argon
Black Perimeter Bar
Satin Nickel Folding Handle
Aluminum Screen
Stone White Screen Surround
Bright View Mesh
***Screen/Combo Ship Loose

Unit: A2
Modern Casement Crank Out - Right Hand
Basic Frame 31" X 55 3/4"
Rough Opening 32 1/2" X 56 1/2"
Sash
IG - 15/16 in - 1 Lite
Tempered Low E2/ERS w/Argon
Black Perimeter Bar
Satin Nickel Folding Handle
Aluminum Screen
Stone White Screen Surround
Bright View Mesh
***Screen/Combo Ship Loose
Standard Mull Charge
3 13/32" Jambs
4 1/2" Overall Jamb Depth
Thru Jamb Installation
NOTICE: The recipient is solely responsible for offloading all deliveries from the Marvin truck. Please ensure the appropriate persons and lifting / handling equipment are present and prepared to take delivery and offload the product.
Weight Summary
Weight(s) provided are approximate calculated packaged weight(s).
Screen, 4 lbs.
Screen, 4 lbs.
Assembly, 164 lbs.
***Note: Safe handling requires proper lifting techniques using adequate personnel and appropriate mechanical assistance, based on weight and

dimensions.
***Note: This configuration is certified to AAMA 450 and meets a minimum structural performance of DP 40. Mull certification ratings may vary from individual unit certification ratings. Reference the mulling chapter of the Marvin ADM for additional information regarding the performance rating of the selected mulls.
*****Note: Unit Availability and Price is Subject to Change**

Initials required

Seller: _____

Buyer: _____

Line #18 Qty: 1	Mark Unit: Bath #1- Type 6	Net Price: Ext. Net Price:	 USD	1,842.10 1,842.10

MARVIN

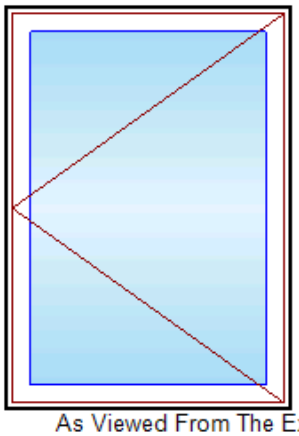

As Viewed From The Exterior

Entered As: RO
FS 31" X 43 3/4"
RO 32 1/2" X 44 1/2"
Egress Information
Width: 23 7/16" Height: 39 3/64"
Net Clear Opening: 6.36 SqFt
Performance Information
U-Factor: 0.28
Solar Heat Gain Coefficient: 0.29
Visible Light Transmittance: 0.49
Condensation Resistance: 50
CPD Number: MAR-N-446-02639-00001
Performance Grade
Licensee #1152
AAMA/WDMA/CSA/101/I.S.2/A440-11
CW-PG50 813X2743 mm (32X108 in)
Water Resistance: 12.12 psf
CW-PG50 DP +50/-50
FL29656

Ebony Exterior
Stone White Interior
Modern Casement Crank Out - Left Hand
Rough Opening 32 1/2" X 44 1/2"
Frame Size 31" X 43 3/4"
Sash
IG - 15/16 in - 1 Lite
Low E2/ERS w/Argon
Black Perimeter Bar
Satin Nickel Folding Handle
Aluminum Screen
Stone White Screen Surround
Bright View Mesh
***Screen/Combo Ship Loose
3 13/32" Jambs
4 1/2" Overall Jamb Depth
Thru Jamb Installation
NOTICE: The recipient is solely responsible for offloading all deliveries from the Marvin truck. Please ensure the appropriate persons and lifting / handling equipment are present and prepared to take delivery and offload the product.
Weight Summary
Weight(s) provided are approximate calculated packaged weight(s).
Single Unit, 75 lbs.
Screen, 4 lbs.
***Note: Safe handling requires proper lifting techniques using adequate personnel and appropriate mechanical assistance, based on weight and dimensions.
*****Note: Unit Availability and Price is Subject to Change**

Note only

Initials required

Seller: _____

Buyer: _____

Line #19 Qty: 1	Mark Unit: Master Bath- Type 10	Net Price: Ext. Net Price:	 USD	1,714.70 1,714.70

MARVIN

Ebony Exterior
Stone White Interior

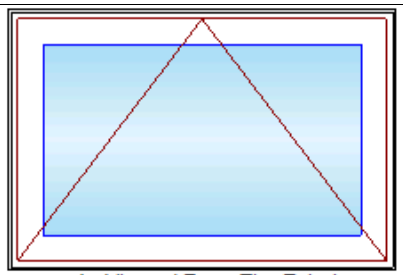

As Viewed From The Exterior

Entered As: RO
FS 31" X 20 3/4"
RO 32 1/2" X 21 1/2"
Egress Information
No Egress Information available.
Performance Information
U-Factor: 0.28
Solar Heat Gain Coefficient: 0.29
Visible Light Transmittance: 0.49
Condensation Resistance: 47
CPD Number: MAR-N-447-01535-00001
Performance Grade
Licensee #1153
AAMA/WDMA/CSA/101/I.S.2/A440-11
CW-PG50 1626X2438 mm (64X96 in)
Water Resistance: 12.12 psf
CW-PG50 DP +50/-50
FL29659

Modern Awning Crank Out - Roto Operating
Rough Opening 32 1/2" X 21 1/2"
Frame Size 31" X 20 3/4"
Sash
IG - 15/16 in - 1 Lite
Tempered Low E2/ERS w/Argon
Black Perimeter Bar
Satin Nickel Folding Handle
Aluminum Screen
Stone White Screen Surround
Bright View Mesh
***Screen/Combo Ship Loose
3 13/32" Jambs
4 1/2" Overall Jamb Depth
Thru Jamb Installation
NOTICE: The recipient is solely responsible for offloading all deliveries from the Marvin truck. Please ensure the appropriate persons and lifting / handling equipment are present and prepared to take delivery and offload the product.
Weight Summary
Weight(s) provided are approximate calculated packaged weight(s).
Single Unit, 52 lbs.
Screen, 3 lbs.
***Note: Safe handling requires proper lifting techniques using adequate personnel and appropriate mechanical assistance, based on weight and dimensions.
*****Note: Unit Availability and Price is Subject to Change**

quote only

Initials required

Seller: _____

Buyer: _____

Line #20 Qty: 1	Mark Unit: Master be Rear Slider	Net Price: Ext. Net Price:	 USD	6,931.22 6,931.22

MARVIN

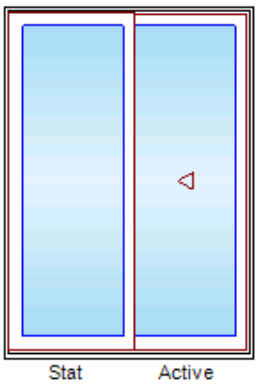

As Viewed From The Exterior

Entered As: RO
FS 59" X 83"
RO 60 1/2" X 83 3/4"
Egress Information
Width: 25 63/64" Height: 79 13/32"
Net Clear Opening: 14.33 SqFt
Performance Information
U-Factor: 0.26
Solar Heat Gain Coefficient: 0.31

Ebony Exterior
Stone White Interior
Modern Sliding Door - OX Left Hand
Rough Opening 60 1/2" X 83 3/4"
Frame Size 59" X 83"
Knocked Down
***Panels Ship Separate
Glass Add For All Sash/Panels
Left Panel
IG - 15/16 in - 1 Lite
Tempered Low E2/ERS w/Argon
Black Perimeter Bar
Right Panel
IG - 15/16 in - 1 Lite
Tempered Low E2/ERS w/Argon
Black Perimeter Bar
Mixed Handle Set Color
Multi-Point
Matte Black Exterior Flush Handle with Latch on Active Panel Keyed
Satin Nickel Interior Flush Handle with Latch on Active Panel
Keyed
Keyed Alike - Keyed Alike Group 1
Modern Sliding Screen
Ebony Screen Surround
Bright View Mesh
***Screen/Combo Ship Loose
Ebony Performance Sill
Black Weather Strip

For product warranty information please visit, www.marvin.com/support/warranty.

Visible Light Transmittance: 0.52 Condensation Resistance: 47 CPD Number: MAR-N-487-00037-00001 ENERGY STAR: N, NC **Performance Grade** No Performance Grade Information available.	6 9/16" Jambs 7 21/32" Overall Jamb Depth Thru Jamb Installation NOTICE: The recipient is solely responsible for offloading all deliveries from the Marvin truck. Please ensure the appropriate persons and lifting / handling equipment are present and prepared to take delivery and offload the product. Weight Summary Weight(s) provided are approximate calculated packaged weight(s). Frame and Accessories, 157 lbs. Left Panel, 103 lbs. Right Panel, 107 lbs. ***Note: Safe handling requires proper lifting techniques using adequate personnel and appropriate mechanical assistance, based on weight and dimensions. ***Note: This door is Knocked Down (KD) and will therefore require assembly. *****Note: Unit Availability and Price is Subject to Change** ***Quote-Only: This unit is not yet available for order. Initials required Seller: _____ Buyer: _____

quote only

Line #21 Qty: 1	Mark Unit: Delivery	Net Price: Ext. Net Price:	 USD	175.00 175.00

Labor Delivery is tailgate
Initials required

Seller: _____

Buyer: _____

TERMS AND CONDITIONS

This Agreement is tendered to the named Purchaser (hereinafter referred to as “Purchaser” or “Customer”) by Authentic Window Design, 5 Odell Plaza, Yonkers, NY 10701 (hereinafter referred to as "AWD” or “Company”) for the service to be provided to the named Purchaser.

Product/Service Description: See attached product summary for specifications, quantities, and all other product details, if applicable.

- The Purchaser and/or homeowner will be required to verify and sign off on all specifications, sizes, and/or light cuts. No order can be placed without proper signoffs.
- AWD is not responsible for any Rough Opening which might have been altered after the order was placed.

Execution of this Contract Means You Have Read the Above Statements!

Terms: The undersigned agrees to pay in accordance with the payment schedule set forth below, and hereby warrants that:

1. They are the owner of the subject premises and/or are empowered to enter into a contract for this product/service.

2. They have read this document and agree with the Terms and Product/Service as set forth.

Acceptance of Agreement: Any changes or modifications must be in writing and signed by both parties. AWD is authorized to place the order as specified. Payments will be made as outlined below.

- **The attached proposal, outlining products, specifications and associated costs, is valid for 30 days from the date it was presented.**

"CURB-SIDE" Delivery:
Customer must provide manpower and equipment to take the product from the tailgate of the truck, or from the container upon delivery.

Total Contract Amount: $ 130,394.97

Payment Schedule:

- **$ 65,394.97 Upon acceptance of this contract**
- **$ 65,000.00 Prior to delivery of materials or pick-up from AWD Warehouse**

quote only

Payment by Credit Card:
In NY and NJ, AWD imposes a surcharge of 3.25% on payments made by credit card, which is not greater than our cost of acceptance. We do not impose a surcharge on payments made by debit card.

Buyer's Right to Cancel:
Cancellation is possible within three business days of signing if solicited at or near your residence.

Notice of Cancellation: To cancel, send an email to your AWD representative no later than midnight of the third business day following the signing. If you do not receive confirmation of the cancellation within 24 hours, please call your AWD representative to confirm the email was received.

Contract was signed (please initial one): In showroom_____ At or near the residence _____

Please Note:

1. Prior to delivery, all open balances MUST be paid.
    1. If a partial delivery is made, payment for the delivered material will be required.
    2. If a delivery must be rescheduled due to non-payment, a $250 extra delivery fee will be applied.
2. Any invoice outstanding for more than 30 days after the date of invoice will be subject to a charge of one-and-a-half (1.5) percent per month (18% annual) interest rate. Should it become necessary to utilize legal or other resources to collect any or all monies due, AWD shall be entitled to full reimbursement of all such costs, including but not limited to reasonable attorney's fees, collection fees or court fees.
3. The order is correct as stated above; no exchanges, refunds, or cancellations are permitted. Please review all window and door operations and light cuts (if applicable). AWD is not responsible for any delays in manufacturing or shipping beyond our control.
4. All drawings are as viewed from the exterior.

Material Delivery Terms:

- All materials will be delivered to the Purchaser within seven days of AWD receiving a substantial portion of the materials from the Manufacturer, or on or about the delivery date requested at time of order, whichever is later.
- If the Purchaser needs the materials to be held by AWD for longer than seven calendar days, the Purchaser will be invoiced, and payment will be immediately due in full for the materials. At that time, the Warehouse and Storage Agreement included within this contract will become active and legally binding.
- AWD will temporarily hold the materials in our warehouse for 7 days from the date of the final material invoice with no storage fee to the customer.
- Partial deliveries will be agreed upon in advance, noted within the contract, and are subject to the terms above.

Complete Agreement:
The foregoing is the complete agreement between the Purchaser and AWD unless a written amendment is made and signed by both parties.

quote only

Acceptance:

Signature of Purchaser: _____

Date: _____

PURCHASE APPROVAL/SIGN OFF

Project Subtotal Net Price: USD	**120,143.31**
Delivery: USD	**175.00**
8.375% Sales Tax: USD	**10,076.66**
Project Total Net Price: USD	**130,394.97**

I have reviewed all line item quotes in detail and agree that the product specifications and pricing are accurate, and I approve the project for order. I acknowledge that additional charges, tax or Terms and Conditions may apply.

quote only

BUYER:

Signature: _____

Title: _____

Date: _____